


Fuse cartridge NH

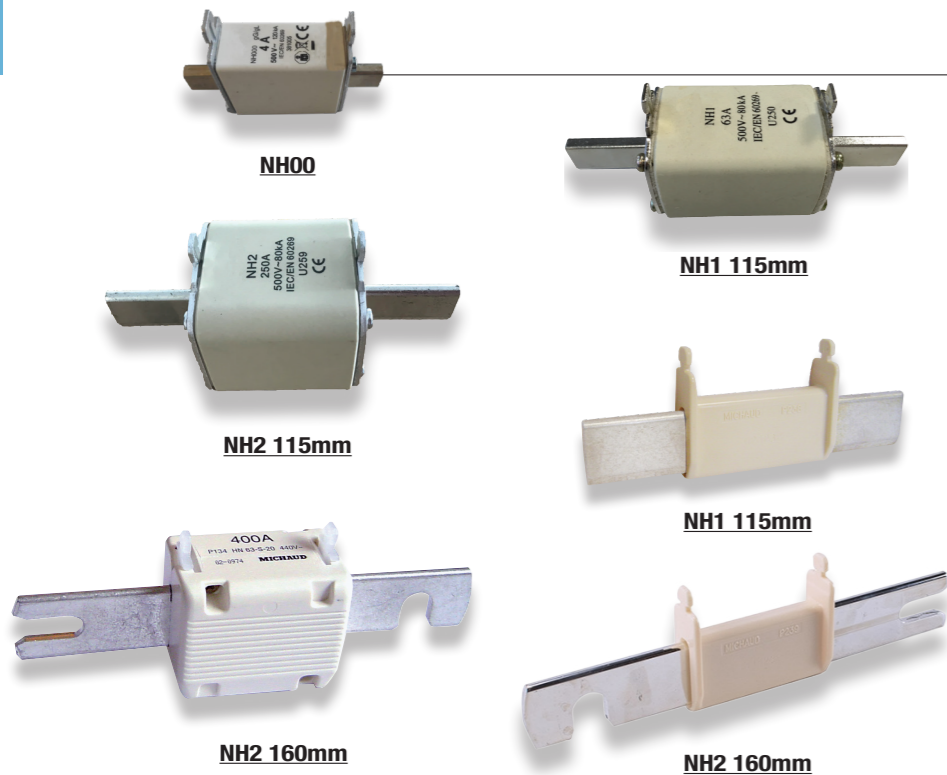

Application


These low voltage fuses cartridges NH00, NH1 or NH2 are type gG. They are used as protection unit of the low voltage public electricity supply networks and works. It is installed in:

- Low voltage switchboards of the public electricity supply substations,
- Cutout boxes, inside or outside supply switches,
- Switch cabinets for subsurface networks,
- Metering boxes and cabinets for different uses.


Description

- The size of this blade fuse cartridge is NH00, NH1 or NH2 according to the IEC 269-2-1 standard.
- It is type gG HPC (High Breaking Capacity).
- It is available in several ratings:
 - 2A, 4A, 6A, 10A, 16A, 20A, 25A, 32A, 35A, 40A, 50A, 63A, 80A, 100A, 125A ou 160A en NH00,
 - 63A, 80A, 100A, 125A, 160A, 200A and 250A for NH1 115mm,
 - 125A, 160A, 200A, 224A, 250A, 315A, 335A and 400A for NH2 115mm,
 - 125A, 200A, 250A and 400A for NH2 160mm.
- It is specified for a nominal voltage of 440V in alternating current with nominal frequency of 50Hz.
- The nominal breaking capacity is 50kA minimum.

Fuse cartridge NH00, NH1 and NH2 (115mm)

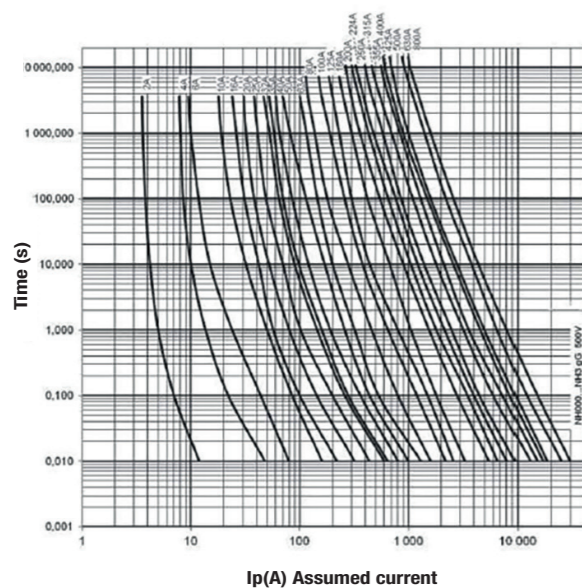

Fuse cartridge NH2 (160mm)

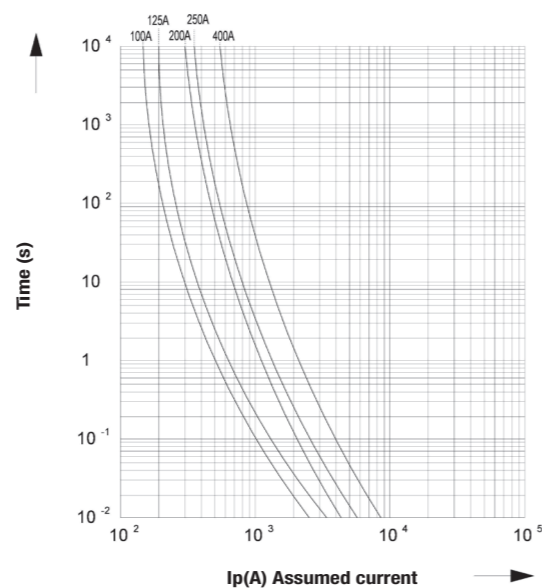

Code	Designation	Weight (kg)	Sales unit
FUSE CARTRIDGE NH00			
U664-2	FUSE CARTRIDGE NH00 gG 500V 2A	0.180	3
U664-4	FUSE CARTRIDGE NH00 gG 500V 4A	0.180	3
U664-6	FUSE CARTRIDGE NH00 gG 500V 6A	0.180	3
U664-10	FUSE CARTRIDGE NH00 gG 500V 10A	0.180	3
U664-16	FUSE CARTRIDGE NH00 gG 500V 16A	0.180	3
U664-20	FUSE CARTRIDGE NH00 gG 500V 20A	0.180	3
U664-25	FUSE CARTRIDGE NH00 gG 500V 25A	0.180	3
U664-32	FUSE CARTRIDGE NH00 gG 500V 32A	0.180	3
U664-35	FUSE CARTRIDGE NH00 gG 500V 35A	0.180	3
U664-40	FUSE CARTRIDGE NH00 gG 500V 40A	0.180	3
U664-50	FUSE CARTRIDGE NH00 gG 500V 50A	0.180	3
U664-63	FUSE CARTRIDGE NH00 gG 500V 63A	0.180	3
U664-80	FUSE CARTRIDGE NH00 gG 500V 80A	0.180	3
U664-100	FUSE CARTRIDGE NH00 gG 500V 100A	0.180	3
U664-125	FUSE CARTRIDGE NH00 gG 500V 125A	0.180	3
U664-160	FUSE CARTRIDGE NH00 gG 500V 160A	0.180	3
U665	NEUTRAL BLADE CONTACT NH00	0.100	1
FUSE CARTRIDGE NH1 AND NH2 115mm			
U250	FUSE CARTRIDGE NH1 63A 115mm	0.400	5
U251	FUSE CARTRIDGE NH1 80A 115mm	0.400	5
U252	FUSE CARTRIDGE NH1 100A 115mm	0.400	5
U253	FUSE CARTRIDGE NH1 125A 115mm	0.400	5
U254	FUSE CARTRIDGE NH1 160A 115mm	0.400	5
U255	FUSE CARTRIDGE NH1 200A 115mm	0.400	5
U256	FUSE CARTRIDGE NH1 250A 115mm	0.400	5
U257	FUSE CARTRIDGE NH2 125A 115mm	0.600	18
U262	FUSE CARTRIDGE NH2 160A 115 mm	0.600	3
U258	FUSE CARTRIDGE NH2 200A 115mm	0.600	18
U263	FUSE CARTRIDGE NH2 224A 115 mm	0.600	3
U259	FUSE CARTRIDGE NH2 250A 115mm	0.600	18
U260	FUSE CARTRIDGE NH2 315A 115mm	0.600	18
U264	FUSE CARTRIDGE NH2 335A 115 mm	0.600	3
U261	FUSE CARTRIDGE NH2 400A 115mm	0.600	18
P238	NEUTRAL BLADE CONTACT NH2 115mm	0.210	1
FUSE CARTRIDGE NH2 160mm			
P130	FUSE CARTRIDGE NH2 125A 160mm	0.780	3
P131	FUSE CARTRIDGE NH2 200A 160mm	0.780	3
P132	FUSE CARTRIDGE NH2 250A 160mm	0.780	3
P134	FUSE CARTRIDGE NH2 400A 160mm	0.780	3
P239	NEUTRAL BLADE CONTACT NH2 160mm	0.290	1

Accessory



The operating handle is used to install and extract fuses from size 00 to size 2 in devices when these are not equipped with an integrated gripping system.

Code	Designation	Weight (kg)	Sales unit
P237	HANDLE FOR FUSES SIZE 00 - SIZE 2	0.260	1