



Unitec-200

65% POLYESTER / 35% COTTON

200 GSM / TWILL 3/1

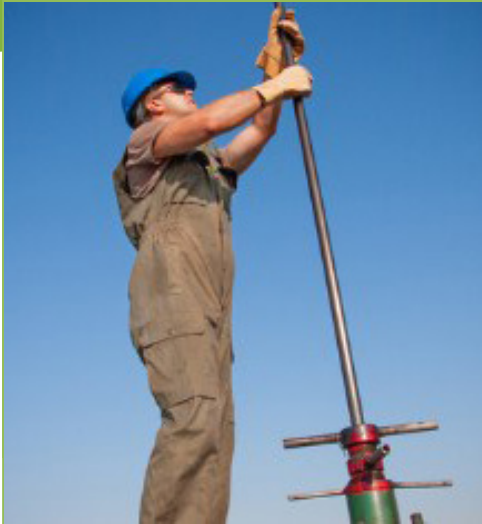

| | |
|---------------------|---|
| Fabric name | Unitec-200 |
| Fabric weight | 200 ± 5 gsm |
| Composition | 65% Polyester, 35% Cotton |
| Full width | 150 ± 2 cm |
| Weave | twill 3/1 |
| Finishes | — |
| Area of use | men's and women's workwear and uniform |
| Washing instruction |  |

Physical properties*

| | | | warp | weft |
|---|---|------------------|----------|------|
| 1 | Tensile strength, N | ISO 13934-1:2013 | 1200 | 550 |
| 2 | Tearing strength, N | ISO 13937-3:2000 | 30 | 30 |
| 3 | Dimensional Stability To Washing, max. | ISO 6330:2000 | 3.0% | 3.0% |
| 4 | Abrasion Resistance | ISO 12947-2:2002 | > 20 000 | |
| 5 | Pilling Resistance (after 1000 rev.) | ISO 12945-2:2000 | 4 | |
| 6 | Colour Fastness To Washing (cotton+polyester) 60°C, min. | ISO 105-C06:2010 | | |
| | Colour change | ISO 105-C06:2010 | 4-5 | |
| | Colour staining | ISO 105-C06:2010 | 3-4 | |
| 7 | Colour Fastness To Perspiration, min. | ISO 105-E04:2013 | | |
| | Colour change | | 4-5 | |
| | Colour staining | | 4-5 | |
| 8 | Colour Fastness To Rubbing, min. | ISO 105-X12:2001 | | |
| | Dry | | 3-4 | |
| | Wet | | 2-3 | |
| 9 | Colour Fastness To Light | ISO 105-B02:2013 | > 4 | |

* The values shown are indicative and may vary slightly from batch to batch.

www.xmtextiles.com

XM TEXTILES EUROPE

Darius ir Gireno st. 42A, Room 509
Vilnius, LT-02189, Lithuania
Tel. +370 52 078 703
info@xmtextiles.com

XM TEXTILES ROMANIA

Sos. Tamasi 20, Hala 6B, Parter,
Buftea, 070000, Ilfov, Romania
Tel. +40 31 630 3639
info@xmtextiles.com

XM TEXTILES ITALIA SRL

Via dei Notai, Blocco 23, Centergross,
40050 Funo di Argelato (BO), Bologna, Italy
Tel. +39 051 952 8202
info@xmtextiles.com