



# TL-D Standard Colours

## TL-D 58W/54-765 1SL/25

TL-D Standard Colors lamps (tube diameter of 26 mm) create atmospheres from warm white to cool daylight. Lamps with moderate efficacy and color rendering.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data


| General Information                |                                 |
|------------------------------------|---------------------------------|
| Cap-Base                           | G13 [Medium Bi-Pin Fluorescent] |
| Life to 50% Failures (Nom)         | 13,000 hour(s)                  |
| Light Technical                    |                                 |
| Color Code                         | 54-765                          |
| Luminous Flux                      | 4,000 lm                        |
| Color Designation                  | Cool Daylight                   |
| Correlated Color Temperature (Nom) | 6200 K                          |
| Color rendering index (CRI)        | 72                              |
| Operating and Electrical           |                                 |
| Power Consumption                  | 58.5 W                          |
| Lamp Current (Nom)                 | 0.670 A                         |
| Voltage (Nom)                      | 111 V                           |

| Controls and Dimming          |                        |
|-------------------------------|------------------------|
| Dimmable                      | Yes                    |
| Mechanical and Housing        |                        |
| Bulb Shape                    | T8                     |
| Net Weight (Piece)            | 167.000 g              |
| Approval and Application      |                        |
| Mercury (Hg) Content (Nom)    | 5.0 mg                 |
| Energy Consumption kWh/1000 h | 68 kWh                 |
| Product Data                  |                        |
| Order product name            | TL-D 58W/54-765 1SL/25 |
| Full product name             | TL-D 58W/54-765 1SL/25 |
| Full product code             | 871150095051240        |
| Order code                    | 928049005422           |
| Material Nr. (12NC)           | 928049005422           |
| Numerator - Quantity Per Pack | 1                      |

TL-D Standard Colours


|                                 |               |
|---------------------------------|---------------|
| EAN/UPC - Product/Case          | 8711500950512 |
| Numerator - Packs per outer box | 25            |
| EAN/UPC - Case                  | 8711500950529 |

Dimensional drawing

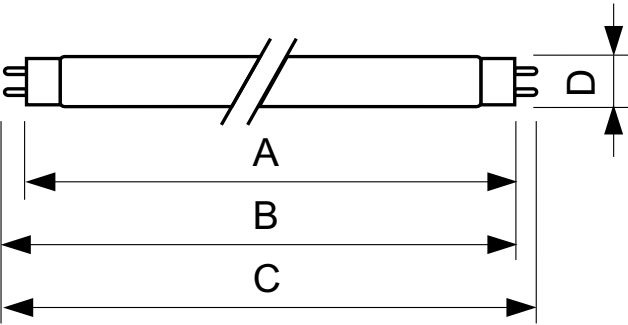


| Product                | D (max) | A (max)    | B (max)    | B (min)    | C (max)    |
|------------------------|---------|------------|------------|------------|------------|
| TL-D 58W/54-765 1SL/25 | 28 mm   | 1,500.0 mm | 1,507.1 mm | 1,504.7 mm | 1,514.2 mm |

Photometric data

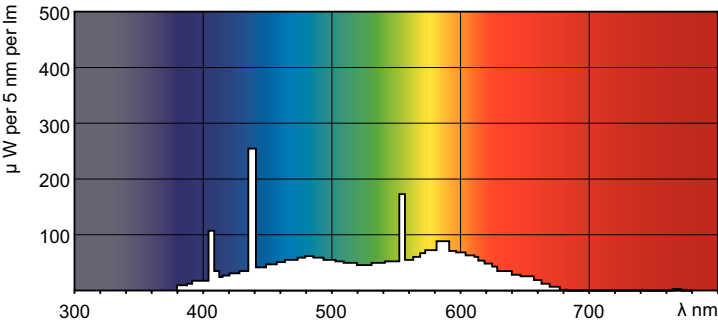


Spectral Power Distribution Colour - TL-D 58W/54-765 1SL/25

Lifetime

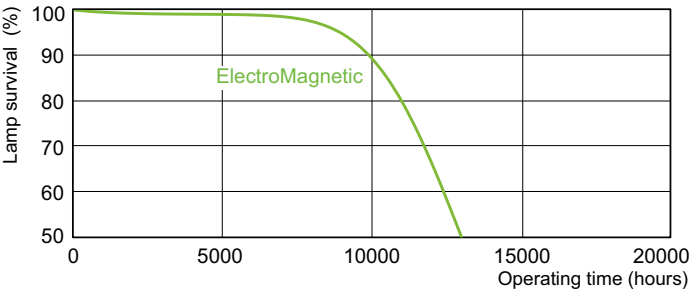

Life expectancy diagram - 3 hour cycle

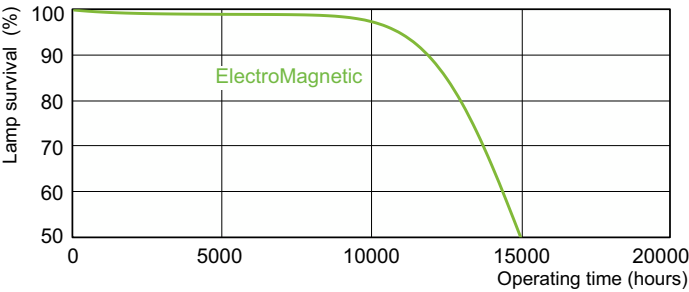

Life expectancy diagram - 12 hour cycle

TL-D Standard Colours

Lifetime



Lumen Maintenance Diagram - TL-D 58W/54-765 1SL/25

