



Product Service


# CERTIFICATE

No. Z2 076729 0120 Rev. 00

**Holder of Certificate:** **Seraphim Solar System Co.,Ltd.**

No.1-2, Hengyao Rd, Henglin Zhen  
Wujin District  
213101 Changzhou  
PEOPLE'S REPUBLIC OF CHINA

**Certification Mark:**

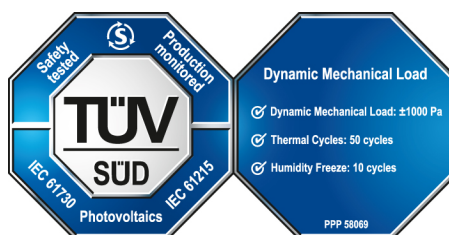

**Product:**

**Crystalline Silicon Terrestrial Photovoltaic (PV) Modules**  
**Mono-crystalline Silicon Photovoltaic Module**

The product was tested on a voluntary basis and complies with the essential requirements. The certification mark shown above can be affixed on the product. It is not permitted to alter the certification mark in any way. In addition, the certification holder must not transfer the certificate to third parties. This certificate is valid until the listed date, unless it is cancelled earlier. All applicable requirements of the testing and certification regulations of TÜV SÜD Group have to be complied. For details see: [www.tuvsud.com/ps-cert](http://www.tuvsud.com/ps-cert)

**Test report no.:** 704062204609-00

**Valid until:** 2027-09-01

**Date,** 2022-09-06

( Zhulin Zhang )

# CERTIFICATE

No. Z2 076729 0120 Rev. 00

## Model(s):

1500 V DC Maximum System voltage,  
 Fire Safety Class C Modules:  
 SRP-xxx-BMA-HV (xxx=425-455 and xxx=525-555, in step of 5);  
 SRP-xxx-BMB-HV  
 (xxx=355-375 and xxx=440-460 and xxx=590-605, in step of 5);  
 SRP-xxx-BMC-HV (xxx=485-505 and xxx=650-670, in step of 5);  
 SRP-xxx-BMD-HV (xxx=390-415 and xxx=535-545, in step of 5);  
 SRP-xxx-BME-HV (xxx=475-485, in step of 5);  
 SRP-xxx-BMF-HV (xxx=415-425, in step of 5);  
 SRP-xxx-BMA-TB (xxx=425-455 and xxx=525-555, in step of 5);  
 SRP-xxx-BMB-TB  
 (xxx=355-375 and xxx=440-460 and xxx=590-605, in step of 5);  
 SRP-xxx-BMC-TB (xxx=485-505 and xxx=650-670, in step of 5);  
 SRP-xxx-BMD-TB (xxx=390-415 and xxx=535-545, in step of 5);  
 SRP-xxx-BME-TB (xxx=475-485, in step of 5);  
 SRP-xxx-BMF-TB (xxx=415-425, in step of 5);

1500 V DC Maximum System voltage,  
 Fire Safety Class A Modules:  
 SRP-xxx-BMA-BG (xxx=425-455 and xxx=525-555, in step of 5);  
 SRP-xxx-BMB-BG  
 (xxx=355-375 and xxx=440-460 and xxx=590-605, in step of 5);  
 SRP-xxx-BMC-BG (xxx=485-505 and xxx=650-670, in step of 5);  
 SRP-xxx-BMD-BG (xxx=395-415 and xxx=535-545, in step of 5);  
 SRP-xxx-BME-BG (xxx=475-485, in step of 5);  
 SRP-xxx-BMF-BG (xxx=415-425, in step of 5);  
 xxx is standing for rated output power at STC.

## Parameters:

|                      |  |
|----------------------|--|
| Safety Class:        | Class II   |
| Max. System Voltage: | 1500V DC   |
| Construction:        | Framed, with Junction box,<br>cable and connector. |
| Fire Safety Class:   | Class C or Class A according to UL790              |

## Tested according to:

IEC 61215-1(ed.1)  
 IEC 61215-1-1(ed.1)  
 IEC 61215-2(ed.1)  
 IEC 61730-1(ed.2)  
 IEC 61730-2(ed.2)  
 PPP 58069A:2013