

ELECTRON Power Plus A67L2P0_1 65 Ah

According to EN 50342


Electrical specification

Voltage:	12V
Capacity C ²⁰ :	65 Ah
Cold cranking current:	580 A [EN]
Cold cranking current:	350 A [DIN]

Mechanical specification

Dimensional group:	L2
ETN reference:	565 019 058 SMF
DIN reference:	56519
Dimensions ^A in mm (LxWxH)	242x175x190
Cell Layout:	0
Terminal Type:	1

Container

Case	Material	Polypropylene
	Bottom hold-down	B13
	Colour	Black

Lid	Material	Polypropylene
	Cover design	SMF
	Colour	Black

Vent caps	Material	Polypropylene
	Type	SMF
	Colour	Black

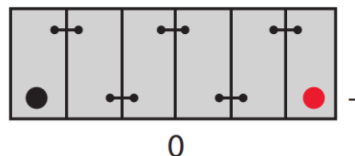

Handles	Material	Polypropylene
	Position	Top - on lid
	Colour	Black

Battery classification as per EN 50342-6

Water consumption	Charge retention	Vibration resistance	Endurance Level
W4	C2	V1	E1

Weight^B

Battery weight in kg:	10.55
Acid weight in kg:	4.75
Total battery weight in kg:	15.30

Layout

Hold-down

Separator

Type	PE
------	----

- ^{A.} Height taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.
- ^{B.} Weight may vary ±5%.