



**Maximum Performance**



## UY180

### FEATURES AND BENEFITS

- Freestanding, high spin
- Stainless steel front, side and top panels
- Stainless steel drum and tub
- Patented soap hopper
- High capacity water inlets (UY280)
- Large drain valve (Ø 76 mm)
- Easy access to all vital parts from the front
- Large door opening for easy loading & unloading

### OPTIONS

- Liquid soap pumps
- Liquid soap connection
- Stainless steel side panels
- Water recovery kit
- Steam heating version
- 3rd water inlet


- High capacity water inlets UY180, UY240
- USB & RS485 plug
- Eco version : lower kW rating on request

### CONTROL

- UniLinc Touch
  - 7" full color touch screen display with swipe function: very intuitive for users
  - user-friendly screen with operating instructions built in as part of the control
  - Complete control content available in 34 languages
  - 20 standard wash programmes, total memory capacity for 99 programmes
  - Automated service reminders remind users to maintenance tasks
  - Water leak detection
  - Slow drain detection
  - Temperature-time verification

TYPE		UY180
<b>INNERDRUM</b>		
Capacity 1:09	kg (lb)	20 (44)
Capacity 1:10	kg (lb)	18 (40)
Volume	litres	180
Diameter	mm	750
<b>DRUM SPEED</b>		
Wash	rpm	42
Extraction	rpm	1047
<b>G-FACTOR</b>		460
<b>HEATING</b>		
Electricity	kW	12 - 18
Steam	bar	1-8
Hot water	°C	90
Sound pressure level	dB (A)	< 65
Water valves connection	BSP	3/4"
Water pressure	kPa	100-800
Rec. water pressure	kPa	300-500
Water inlet	l/min	20
Drain valve	outer Ø mm	76
Flow amount with drain valve	l/min	210
Steam valve connection	BSP	1/2"
Steam pressure	kPa	100-800
<b>DIMENSIONS</b>		
Size H×W×D	mm	1430×970×970
Net weight	kg	380
<b>TRANSPORT DATA</b>		
Packed H×W×D	mm	1550×1025×1015
Gross weight	kg	395

TYPE	A	B	C	D	E	F	G	H	I	J	K	L	M	N	R	S	T	U	V	W
UY180	970	24	477	1430	777	335	1095	1007	48	90	1234	490	108.5	1324	80	293	610	218	113	113

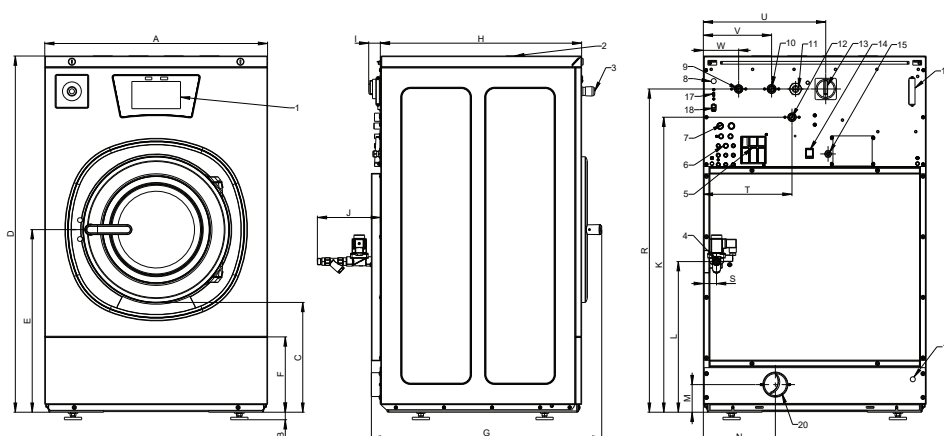

- |   |   |  |
|---|---|--|
| <ul style="list-style-type: none"> <li>1. Control panel</li> <li>2. Soap dispenser</li> <li>3. Central stop button</li> <li>4. Steam connection</li> <li>5. Air relieve</li> <li>6. Liquid soap connection</li> <li>7. Recycled water inlet</li> <li>8. Recycled water valve cable inlet</li> </ul> | <ul style="list-style-type: none"> <li>9. Cold water inlet, soft</li> <li>10. Cold water inlet, hard</li> <li>11. Electrical connection</li> <li>12. Hot water inlet</li> <li>13. Main switch</li> <li>14. Heating change-over switch</li> <li>15. Liquid soap pump electrical connection</li> <li>16. Fuses</li> </ul> | <ul style="list-style-type: none"> <li>17. USB port - optional</li> <li>18. PC programming connection</li> <li>19. Discharge water cable inlet</li> <li>20. Drain valve &lt;3 in (76 mm)</li> <li>21. Drain valve 1/2", applicable for wash bath sample (on request only)</li> <li>22. Hidden USD port (under top cover) - standard</li> </ul> |
|---|---|--|

#### CONSULT YOUR SALES REPRESENTATIVE FOR AVAILABILITY

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice. [www.unimac.com](http://www.unimac.com)

UniMac by Alliance Laundry Systems