

# DS-KV6113-PE1(B)

## Video Intercom Villa Door Station

**HIKVISION**



### Key Feature

- Standard PoE
- 2 MP HD camera
- Noise suppression and echo cancellation
- Low illumination
- Access control functions
- Tamper-proof
- Configuration remotely via Web

|       |                              |
|-------|------------------------------|
| REACH | Regulation (EC) No 1907/2006 |
| WEEE  | 2012/19/EU                   |

### Approval

|             |                                                                                                                     |
|-------------|---------------------------------------------------------------------------------------------------------------------|
| CE-EMC      | a. EN 55032:2015<br>b. EN 61000-3-2:2014<br>c. EN 61000-3-3:2013<br>d. EN 50130-4:2011 +A1:2014                     |
| CE-LVD      | EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 + A2:2013                                                           |
| CB          | IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am 2:2013                                                           |
| FCC-SDOC    | 47 CFR Part 15, Subpart B                                                                                           |
| C-TICK(EMC) | AS/NZS CISPR 32:2015                                                                                                |
| UL          | UL 60950-1 & CAN/CSA C22.2 No. 60950-1-07, Information Technology Equipment – Safety – Part 1: General Requirements |
| ROHS        | 2011/65/EU                                                                                                          |

## Specification


| System parameters          |                                                              |
|----------------------------|--------------------------------------------------------------|
| Operation system           | Embedded Linux operation system                              |
| Operation method           | Single-button                                                |
| Flash                      | 32M, 16 M                                                    |
| RAM                        | 256 M                                                        |
| Video Parameters           |                                                              |
| Camera                     | 2MP HD camera                                                |
| Night vision               | Low illumination IR supplement mode:3 m                      |
| BLC                        | Support                                                      |
| DNR                        | Support                                                      |
| WDR                        | True WDR                                                     |
| Field of view              | Horizontal: 129° Vertical: 75°                               |
| Video compression standard | H.264                                                        |
| Stream                     | Main stream: 1080p@30fps, 720p@25fps<br>Sub stream: D1@25fps |
| Resolution                 | Main stream: 1920 × 1080p, 720p<br>Sub stream: 704 × 576     |
| Motion detection           | Support                                                      |
| Anti-flicker frequency     | 50 Hz, 60 Hz                                                 |
| Audio parameters           |                                                              |
| Audio intercom             | Two-way audio communication                                  |
| Audio input                | Built-in omnidirectional microphone                          |
| Audio output               | Built-in loudspeaker                                         |
| Audio compression standard | G.711 U                                                      |
| Audio compression Rate     | 64 Kbps                                                      |
| Audio quality              | Noise suppression and echo cancellation                      |
| Network parameters         |                                                              |
| Wired network              | 10/100 Mbps Ethernet                                         |
| Network protocol           | TCP/IP, RTSP                                                 |
| Access control parameters  |                                                              |
| Reading frequency          | 13.56 MHz                                                    |
| Card type                  | Mifare card                                                  |
| Interfaces                 |                                                              |
| RS-485                     | 0                                                            |
| Wi-Fi                      | /                                                            |
| Debugging port             | 1                                                            |
| TF card                    | 0                                                            |
| Door contact input         | 1                                                            |
| Exit button input          | 1                                                            |
| Grounding                  | 1                                                            |
| Physical button            | 1                                                            |
| TAMPER switch              | 1                                                            |
| Door control               | 1, breakdown voltage: 36 V                                   |
| Performances               |                                                              |

| Card capacity           | Max. 10000                                                                                        |
|-------------------------|---------------------------------------------------------------------------------------------------|
| User capacity           | Max. 2000                                                                                         |
| Linked Indoor station   | Max. 4                                                                                            |
| Linked sub door station | Max. 16                                                                                           |
| Linked doorphone        | Max. 8                                                                                            |
| Protocol                | ISAPI, RTSP, STMP, SNMP                                                                           |
| Unlock door             | Unlock by presenting cards, unlock via Client Software, unlock via App, unlock via indoor station |
| General                 |                                                                                                   |
| Protection level        | IP65                                                                                              |
| Indicator               | 2                                                                                                 |
| Power supply            | IEEE802.3af, standard PoE<br>12 VDC                                                               |
| Power consumption       | < 10 W                                                                                            |
| Working temperature     | -40° C to +53° C (-40° F to 127.4° F)                                                             |
| Working humidity        | 10% to 95%                                                                                        |
| Installation            | Surface mounting                                                                                  |
| Dimension               | 138 mm × 65 mm × 27 mm                                                                            |


## Available Model

DS-KV6113-PE1(B)

## Appearance and Interfaces

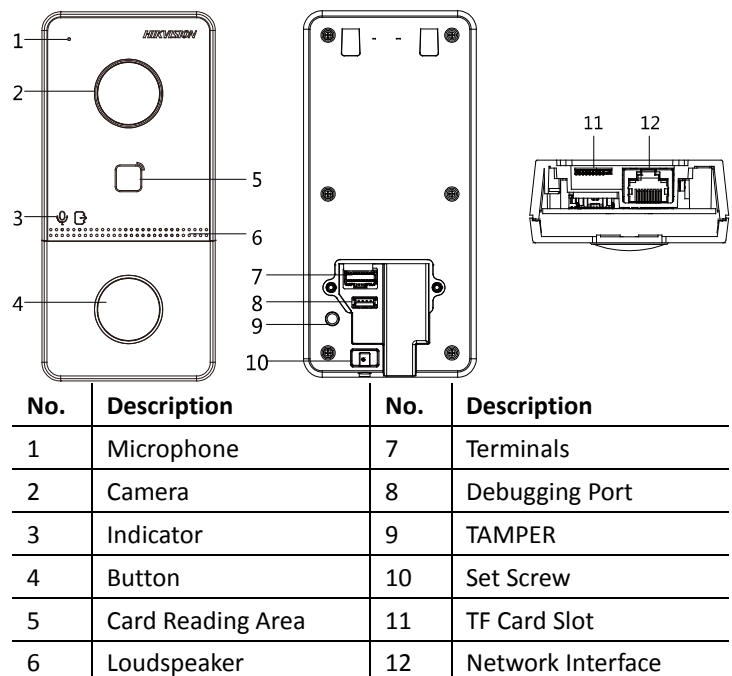

## Dimension

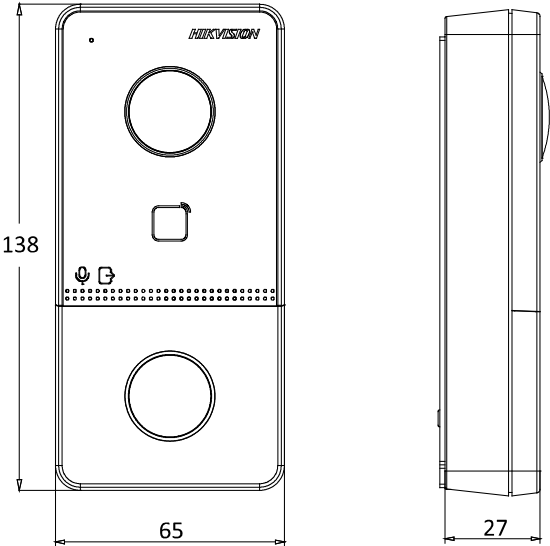

Distributed by

**HIKVISION®****Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Australia**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Canada**  
T +1-866-200-6690  
sales.canada@hikvision.com

**Hikvision Thailand**  
T +662-275-9949  
sales.thailand@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
sales.eu@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Turkey**  
T +90 (216) 521 7070- 7074  
sales.tr@hikvision.com

**Hikvision Malaysia**  
T +601-7652-2413  
sales.my@hikvision.com

**Hikvision UK & Ireland**  
T +01628-902140  
sales.uk@hikvision.com

**Hikvision South Africa**  
Tel: +27 (0)1 0351172  
sale.africa@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Kazakhstan**  
T +7-727-9730667  
nikia.panfilov@hikvision.ru

**Hikvision Vietnam**  
T +84-974270888  
sales.vt@hikvision.com

**Hikvision UAE**  
T +971-4-4432090  
salesme@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Tashkent**  
T +99-87-1238-9438  
uzb@hikvision.ru

**Hikvision Hong Kong**  
T +852-2151-1761  
info.hk@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Korea**  
T +82-[0]31-731-8817  
sales.korea@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
info.pl@hikvision.com

**Hikvision Indonesia**  
T +62-21-2933759  
Sales.Indonesia@hikvision.com

**Hikvision Colombia**  
sales.colombia@hikvision.com