


MARK VIEW

A ANKARA
SERAMİK
SHF 20 G
MADE IN TURKEY

Markalama
Mark

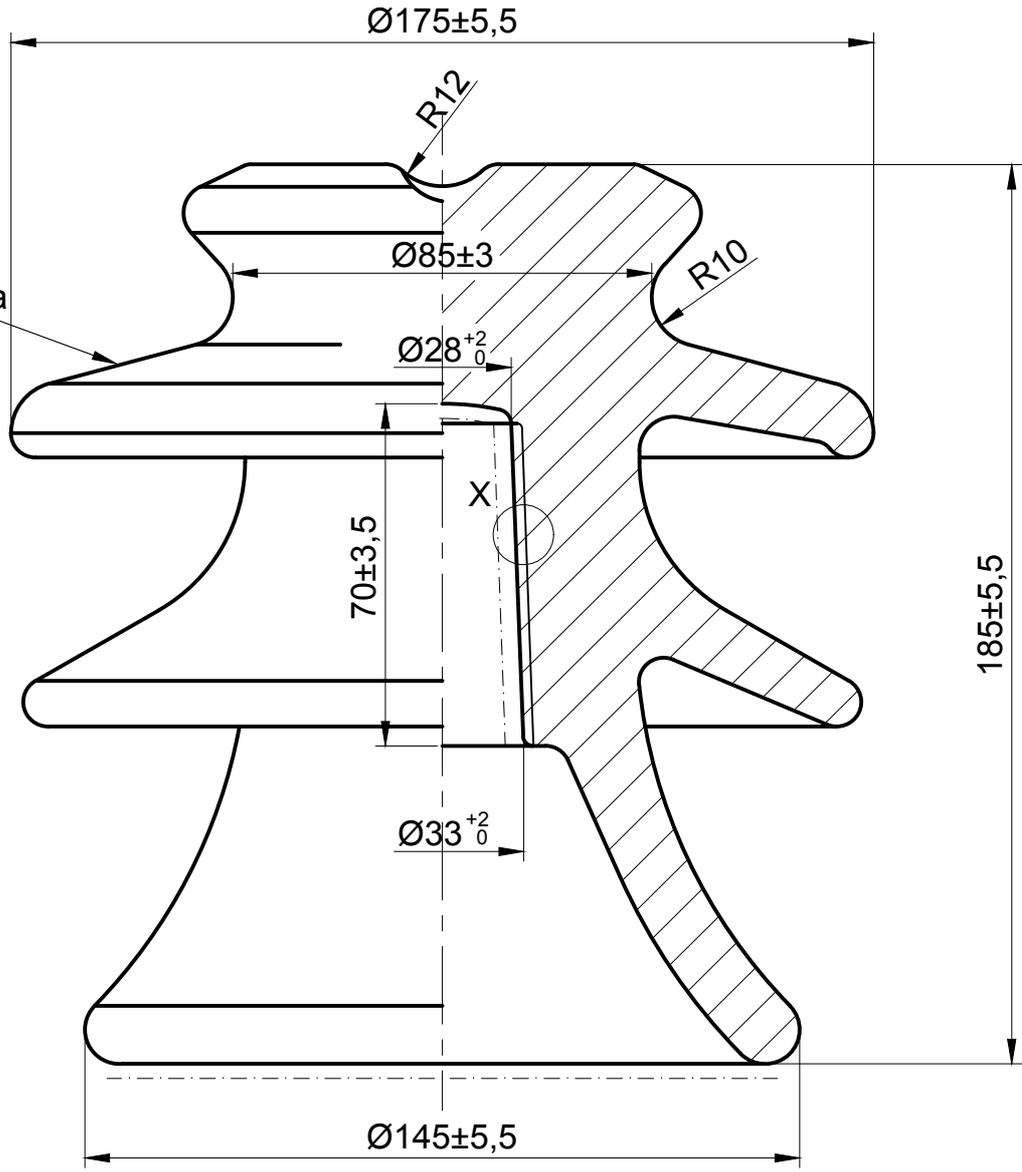


----- Sırsız Yüzey (Unglazed Surface)

ELEKTRİKSEL PERFORMANS ELECTRICAL PERFORMANCE (IEC 60383-1)		
Güç Frekansı Dayanım Gerilimi (Power Frequency Withstand Voltage)	Yaş (Wet)	65
	Kuru (Dry)	85
Yıldırım Darbe Dayanım Gerilimi (Lightning Impulse Withstand Voltage)		100 kV

MEKANİKSEL PERFORMANS MECHANICAL PERFORMANCE (IEC 60383-1)	
Eğilmede Minimum Kırılma Yüğü (Minimum Bending Failing Load)	13 kN

DIELEKTRİK PARÇALAR (DIELECTRIC PARTS)	
Malzeme (Material) IEC 60672-3	Porselen (Porcelain)
Kaçak Mesafesi (Creepage Distance)	(Z-Z) min. 400mm
Sır Rengi (Glaze Color)	Kahverengi (Brown)
Tolerans (General Tolerance)	DIN 40680
Ağırlık (Weight)	~3,5 kg



'X' Detail

ALL DIMENSIONS ARE IN mm UNLESS OTHERWISE STATED

THIS DRAWING IS NOT TO BE COPIED OR THE INFORMATION HEREIN DIVULGED TO ANY THIRD PARTY OR USED FOR THE MAKING OF APPARATUS WITHOUT THE WRITTEN PERMISSION OF ANKARA SERAMİK A.Ş.

 www.ankaraseramik.com PORSELEN SAN. ve TİC. A.Ş. PORCELAIN INDUSTRY OF TURKEY 1.ORGANİZE SAN.BÖL.ÖSMANLI CAD. NO:15 SINCAN/ANKARA/TURKEY TEL: (0312) 267 37 77 FAX: (0312) 267 27 77 info@ankaraseramik.com	Yayın Tarihi (Release Date)	17.01.2022	Malzeme (Material)	Porselen (Porcelain)	Adet (Piece)
	Onay (Approved By)	İ.ŞAHİN	Std. No.		
	Kontrol (Checked)	Ö.ÇITAK	Rev. No.		
	Çizen (Drawn By)	Ü.ÇAMSARI	Ürün no / Müşteri (Product No / Customer)	314022-000	Ölçek (Scale)
 SHF 20 G (CD:400mm) PİN TİP İZOLATÖR PIN TYPE INSULATOR					