


JEET



TOOL VIDEOSCOPE

JEET S Series


excellent quality, affordable prices

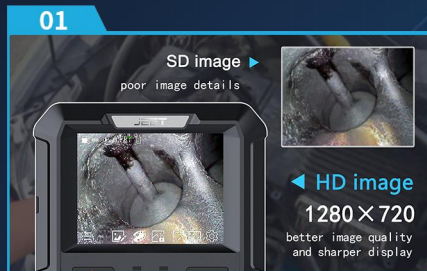

1280×720 Mega HD Image



car front face design button

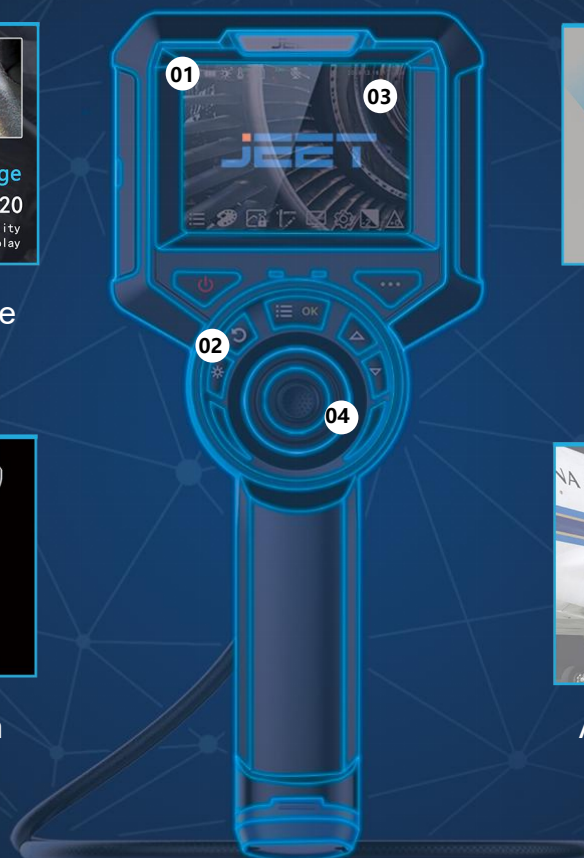

3.5 inches IPS
HD full-view display



Aircraft engine streamlined
design joystick




joystick
control



360°accurate
articulation

joystick-control 360°accurate articulation

horizontal
line

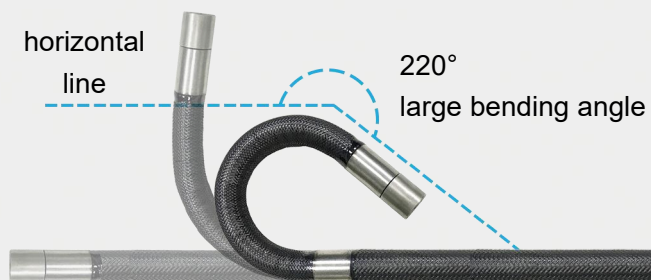


220°
large bending angle

220°large bending angle, ensure to
inspect every corner of detected object




Insert hole diameter
≈ pen diameter

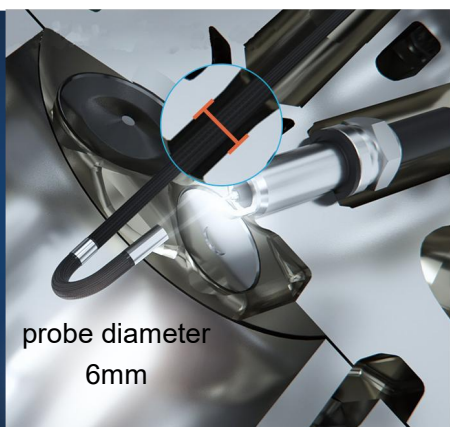


probe diameter
6mm

It can insert and inspect as long as
there are holes or gaps

super bright ceramic light
0 1 2 3 4 5 6

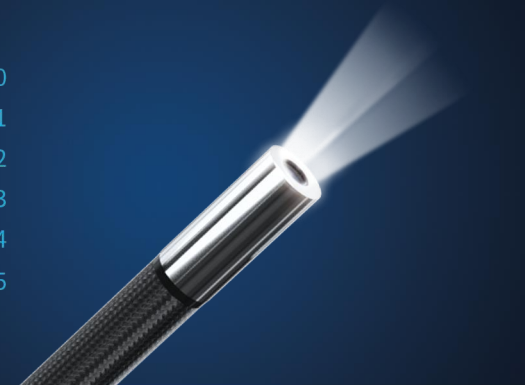

super bright ceramic light with
0-6 levels control

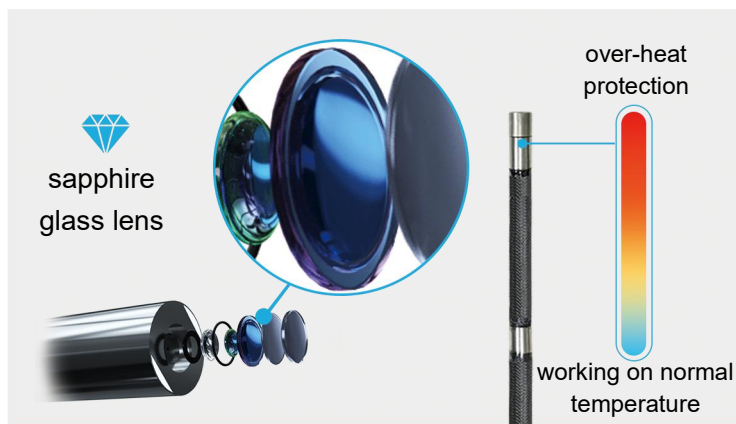

sapphire glass lens

over-heat protection

working on normal temperature

sapphire glass lens, high precision probe



Wireless image transmission

HDMI port

USB port

TF card

photo/video taking button

one-click photo/video taking, real-time wireless image transmitting



intelligent image-process system

simple operating logic

iconic menu, easy operation



114mm

265mm

light and portable only 0.5KG



tube • IP67

product body • IP65

The whole product is dust-proof and water-proof



anti-fall engineering alloy materials

tungsten-alloy braided tube

excellent quality, anti-fall and wear-resistant



one battery \geq 3H

super long working time



1560mm

extendable pole(extending length)

390mm

extendable pole(original length)

mini HDMI cable

foldable tripod

TF card

card reader

li battery

adaptor

data cable

packaging case

optional accessories

Tube System	Model	S610	S615
	Probe Diameter(mm)	Φ6.0	
	Tube Length	1m	1.5m
	Tube Material	tungsten alloy	
	Camera Pixels	1 mega pixels	
	Image Resolution	1280*720	
	DOF	7~110mm/20~150mm	
	FOV	120°	
	Light Source	LED ceramic light	
	Illuminance	25000Lx	
	Protecting Device of Durability	buffer protection device on the connection between tube and handle	
	Articulation	360° joystick-control articulation	
Monitor System	Bending Angle	maximum: 220°	
	Structure	hand-held integrated design	
	Display	3.5 inches IPS full-view display	
	Zoom In/Out	5X	
	Image Effect	image freezing, cold/warm color	
	Image Adjustment	image sharpness/ contrast/gamma value	
	Image/Video Format	JPEG/MP4	
	File Storage	standard TF card: 16G, Maximum: 64G	
	Data Port	HDMI video output, Micro USB port	
	Wireless Image Transmission	WIFI (optional)	
	Battery	detachable & rechargeable lithium battery	
Accessories	Battery Capacity	3.7V, 3200mAh	
	Battery Working Time	≥3H	
	Battery Charge	DC 5V/1A	
	Outer Case Material	anti-fall engineering alloy material	
	Water/Dust Proof	probe/tube: IP67; monitor: IP65	
	Weight	≈0.5KG	
	Standard Configuration	instrument case/ videoscope/ battery card reader/ TF card/charger/ USB cable/ manual	
optional		extendable pole: 0.35-1.8m/mini HDMI cable/ foldable tripod	

