

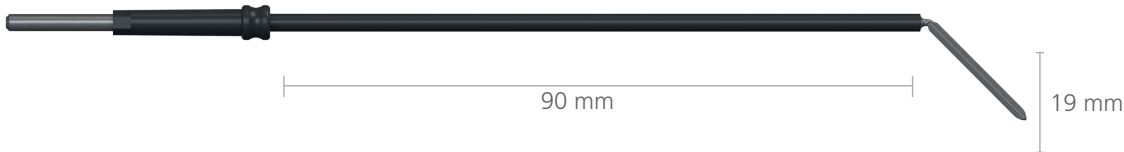


- Für HF- und RF-Generatoren geeignet  
Applicable for HF- and RF-generators
- Wiederverwendbar  
Reusable
- Autoklavierbar (134° C)  
Autoclavable (134° C)
- Sechskant-Verdrehschutz  
With hexagon-anti-twist protection

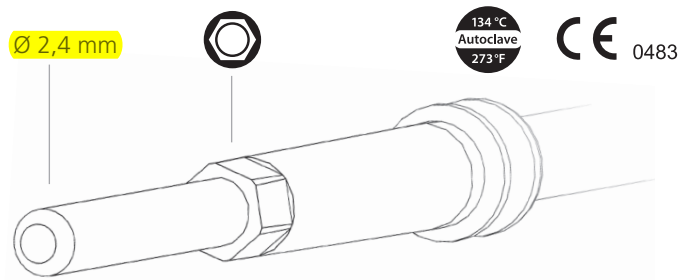

<b>Artikel-Nr.   item code</b>	<b>308-2</b>			<b>VPE   unit</b>	5
<b>Maße   dimensions</b>	90 mm	19 mm	1,6 mm	<b>Umax</b>	4,3 kVp
<b>Beschreibung description</b>	Lanzettenelektrode Lancet electrode				

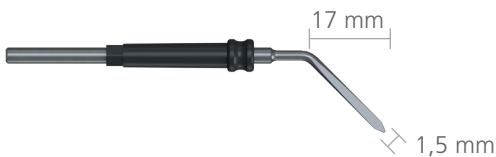

<b>Artikel-Nr.   item code</b>	<b>308-5</b>
<b>Beschreibung description</b>	Messerelektrode Knife electrode
<b>Maße   dimensions</b>	1,5 mm
<b>VPE   unit</b>	5
<b>Umax</b>	4,3 kVp



<b>Artikel-Nr.   item code</b>	<b>306-1</b>
<b>Beschreibung description</b>	Drahtschlingenelektrode Wire loop electrode
<b>Maße   dimensions</b>	Ø 5 mm
<b>VPE   unit</b>	5
<b>Umax</b>	4,3 kVp




<b>Artikel-Nr.   item code</b>	<b>306-2</b>
<b>Beschreibung description</b>	Drahtschlingenelektrode Wire loop electrode
<b>Maße   dimensions</b>	Ø 10 mm
<b>VPE   unit</b>	5
<b>Umax</b>	4,3 kVp

· Für HF- und RF-Generatoren geeignet  
Applicable for HF- and RF-generators


· Wiederverwendbar  
Reusable

· Autoklavierbar (134° C)  
Autoclavable (134° C)


· Sechskant-Verdrehschutz  
With hexagon-anti-twist protection

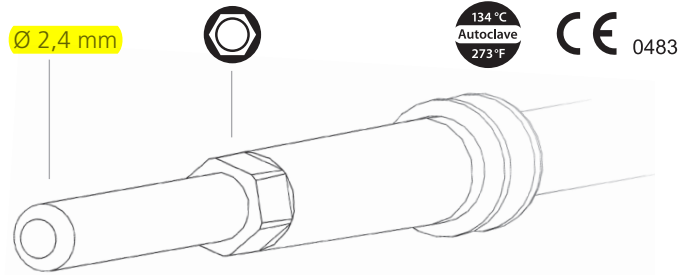


<b>Artikel-Nr.   item code</b>	<b>353-0</b>	<b>VPE   unit</b>	1
<b>Maße   dimensions</b>	110 mm	Ø 5 mm	<b>Umax</b> 500 Vp
<b>Beschreibung   description</b>	Drahtschlingenelektrode Wire loop electrode		

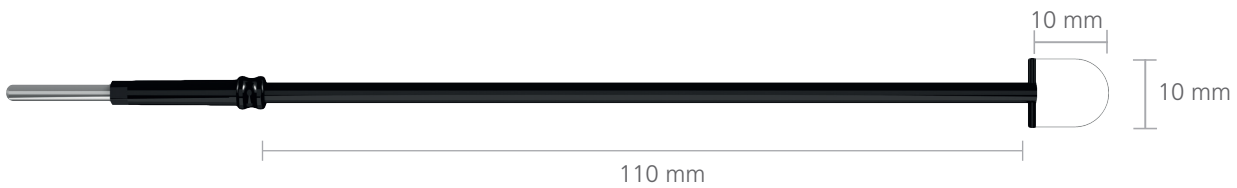

<b>Artikel-Nr.   item code</b>	<b>346-0</b>	<b>VPE   unit</b>	1
<b>Maße   dimensions</b>	110 mm	10 mm	10 mm
<b>Beschreibung   description</b>	Drahtschlingenelektrode Wire loop electrode		

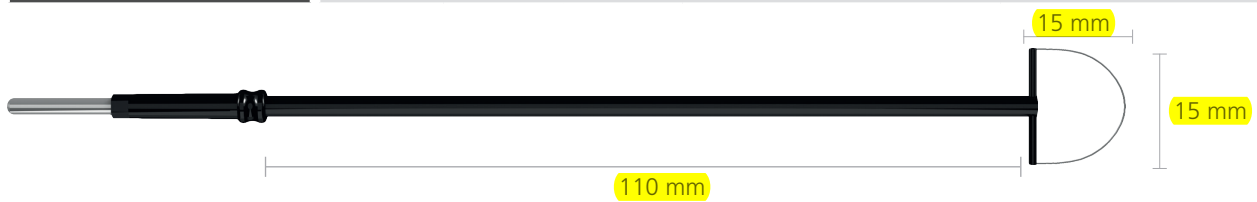

<b>Artikel-Nr.   item code</b>	<b>350-1</b>	<b>VPE   unit</b>	1
<b>Maße   dimensions</b>	110 mm	15 mm	15 mm
<b>Beschreibung   description</b>	Drahtschlingenelektrode Wire loop electrode		

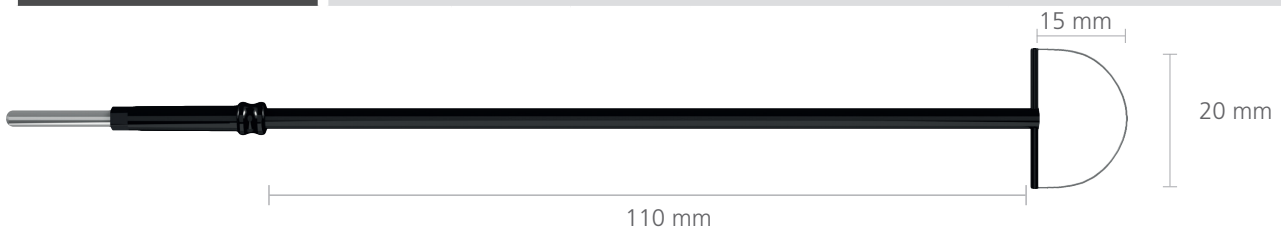



<b>Artikel-Nr.   item code</b>	<b>350-0</b>	<b>VPE   unit</b>	1
<b>Maße   dimensions</b>	110 mm	20 mm	15 mm
<b>Beschreibung   description</b>	Drahtschlingenelektrode Wire loop electrode		

· Für HF- und RF-Generatoren geeignet  
Applicable for HF- and RF-generators

· Wiederverwendbar  
Reusable

· Autoklavierbar (134° C)  
Autoclavable (134° C)

· Sechskant-Verdrehschutz  
With hexagon-anti-twist protection

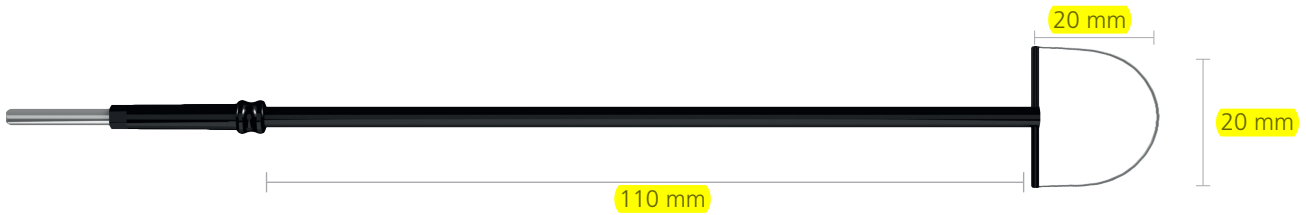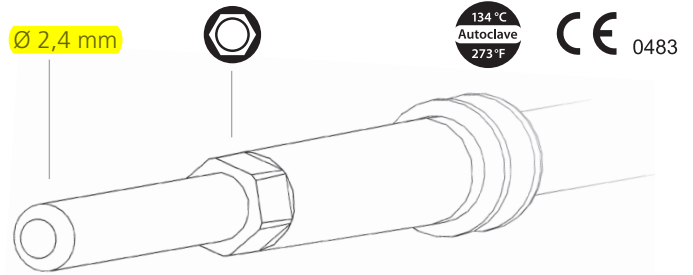

<b>Artikel-Nr.   item code</b>	<b>351-0</b>	<b>VPE   unit</b>	1
<b>Maße   dimensions</b>	110 mm	20 mm	20 mm
<b>Beschreibung   description</b>	Drahtschlingenelektrode Wire loop electrode		
		<b>Umax</b>	500 Vp



<b>Artikel-Nr.   item code</b>	<b>352-0</b>	<b>VPE   unit</b>	1
<b>Maße   dimensions</b>	110 mm	20 mm	25 mm
<b>Beschreibung   description</b>	Drahtschlingenelektrode Wire loop electrode		
		<b>Umax</b>	500 Vp