


Selectra

Lead Delivery System

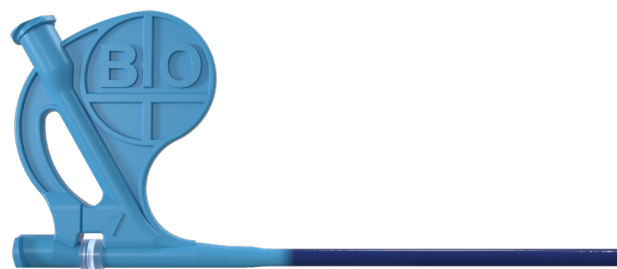

Ordering Information

Model	Length	Order number	Length	Order number
Selectra Straight	45 cm	375 537	55 cm	375 521
Selectra BIO2	45 cm	375 523	55 cm	375 524
Selectra Multipurpose EP (MPEP)	45 cm	375 531	55 cm	375 532
Selectra Multipurpose Hook (MPH)	45 cm	375 533	55 cm	375 534
Selectra Right	45 cm	375 535	55 cm	375 536
Selectra Amplatz 6.0	45 cm	375 519	55 cm	375 520
Selectra Hook	45 cm	375 529	55 cm	375 530
Selectra Extended Hook	45 cm	375 527	55 cm	375 528
Selectra IC-50	59 cm	392 289	69 cm	392 290
Selectra IC-90	59 cm	392 291	69 cm	392 292
Selectra Accessory Kit				375 518
Selectra Slitter Tool				383 119

Product Highlights

- Ergonomic handle design with integrated slidable serial valve
- Balanced sheath design for optimal torque transmission
- Hydrophilic inner coating for smooth lead introduction and safe system removal

Selectra

Technical Data

Selectra outer catheter

Working length	45 cm; 55 cm
Inner diameter	2.44 mm [7.3 F]
Outer diameter	2.91 mm [8.7 F]
Material	PEBAX and PA; valve: silicone
Inner coating	Hydrophilic coating
Proximal connection	Female Luer lock
Package contents	• 1 outer guiding catheter • 1 dilator for outer guiding catheter

Dilator

Working length	53.5 cm; 63 cm
----------------	----------------

Selectra inner catheter

Working length	59 cm; 69 cm
Inner diameter	1.83 mm [5.4 F]
Outer diameter	2.31 mm [6.9 F]
Material	PEBAX and PA; valve: silicone
Inner coating	Hydrophilic coating
Tip angle	50°; 90°
Guide wire compatibility	0.014"–0.035"
Lead compatibility	<5 F
Proximal connection	Female Luer lock
Package content	• 1 inner catheter

Selectra accessory kit

Package contents	• 12 cm³ syringe with Luer lock • 2 transvalvular insertion tools, inner diameter 2.4 mm [7.3 F] • 1 Seldinger guide wire 150 cm • 1 torquer • 1 Selectra splitter tool • 2 bi-directional check valves • 1 Tuohy-Borst adapter, inner diameter 1.1 mm [3.3 F] • 2 one-way stopcocks
------------------	--

Selectra splitter tool

Package content	• 1 Selectra splitter tool
-----------------	----------------------------

