


# Laboratory Refrigerator(2-8°C)



# Laboratory Refrigerator

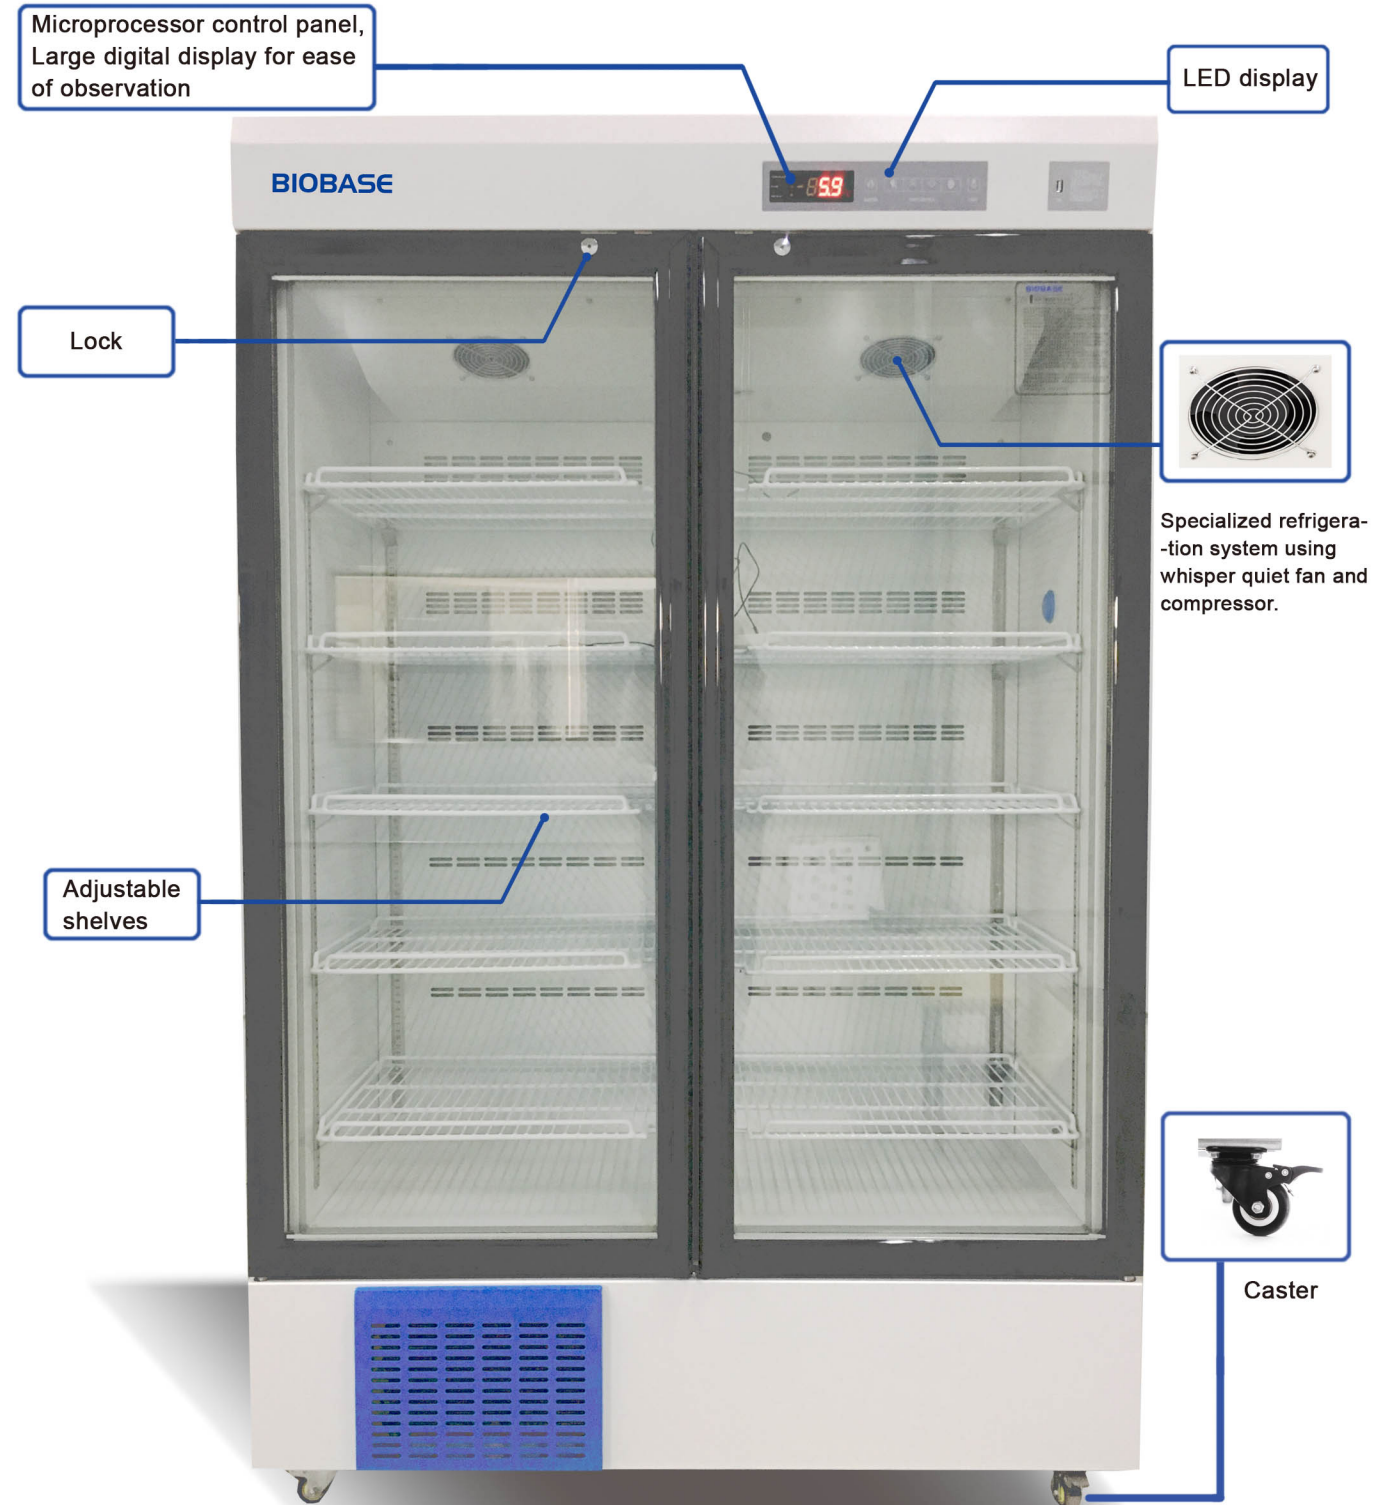

## Technical Parameters

Model	BPR-5V160	BPR-5V250	BPR-5V310	BPR-5V588	BPR-5V1000	
External Size(W*D*H) mm	500*550*1300	580*575*1810	620*575*1980	1220*630*1885	1220*860*1885	
Capacity	130L	250L	310L	656L	1000L	
Temp. Range	2°C~8°C					
Temp. Accuracy	0.1°C					
Control System	Microprocessor Control, Large Screen LED Display					
Alarm	Audible and visual alarm for: High and low temperature, Power failure alarm, Sensor failure, Door ajar					
Refrigeration Type	Forced air refrigeration system					
Refrigerant	R600a, CFC Free			R134a, CFC Free		
Condenser & Evaporator	Bundy tube condenser					
Defrost	Auto defrost					
Construction	Structure	Unibody Design & Mono-assembly foaming (Rigid polyurethane insulation material)				
	Internal Material	Embossed aluminum sheet			Cold-rolled steel coated with anti-bacteria powder	
	External Material	Cold-rolled steel coated with anti-bacteria powder				
Shelves	4 pcs	4pcs	5 pcs	10 pcs		
Door	Glass door with electric heating					
Consumption	136W	170W	180W	560W		
Power Supply	AC110/220V±10%, 50/60Hz					
Standard Accessories	LED Lamp, shelves, door keys, USB port, probe access port(BPR-5V588 & BPR-5V1000)					
Optional Accessory	Temperature recorder Printer (USB port cannot be selected at the same time)					
Package Size(W*D*H) mm	590*595*1380	670*650*1870	700*650*2030	1340*750*2100	1340*980*2100	
Gross Weight	51kg	68kg	84kg	248kg	280kg	