



Vacuum Module mod. 1000/1300 mm Transversal Technical Data Sheet

STANDARD EQUIPMENT



Water pump 150 bar/200 bar according to the model - 15 l water/min.

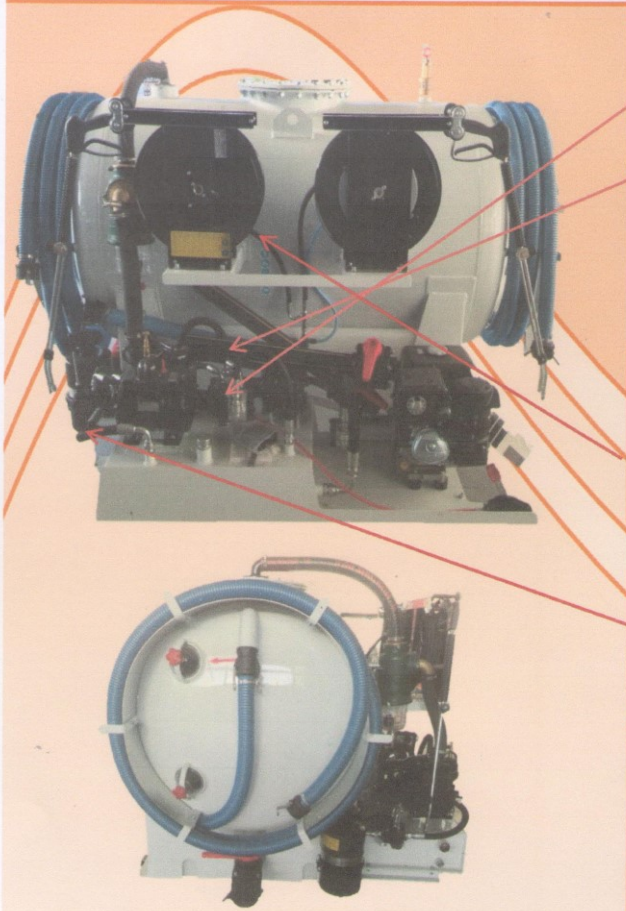

Hydraulic engine performance 1980 l/min. (air)/2500 l/min. according to the model




Sanitary concentrate tank capacity 5 l



Noise reducer and waste oil filter



Double barrel spraygun allows the regulation of the washing pressure

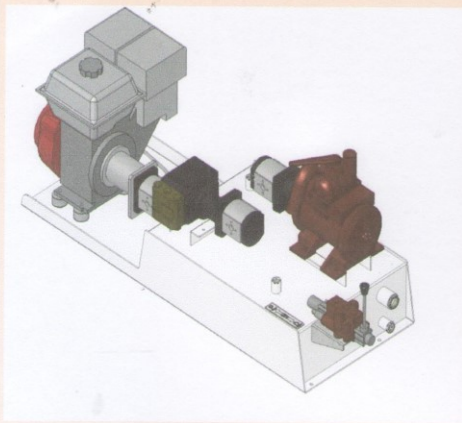

Mechanical and Technical Characteristics:

The high pressure water pump and the decompressor are powered by a hydraulic motor.

The petrol fuelled (13.5 CV) combustion engine, flanged to a hydraulic pump, permits the generation of the power needed for functioning of the equipment.

The hydraulic oil tank holds approximately 45 liters.


The system is mechanically independent; connected up to the cistern, the system can be made to function on stand-alone configuration.

Vacuum module maximum pressure: 1.5 bar.

Environmental operating conditions: Operating temperature from 0° C to 40° C.




Vacuum Module mod. 1000/1300 mm Transversal Technical Data Sheet

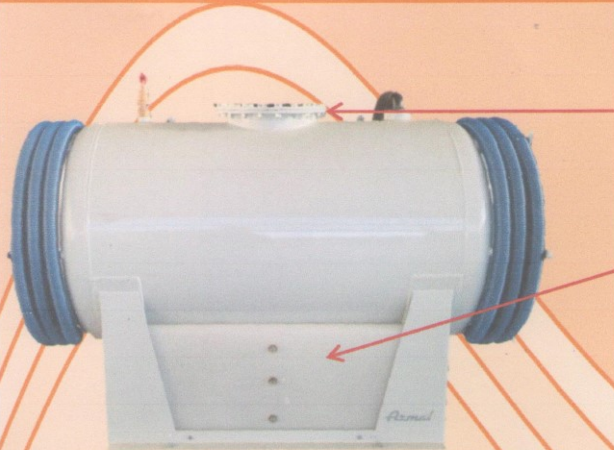

STANDARD EQUIPMENT

Manhole allows the tank inspection and internal cleaning

The water tank installed under the wastewater tank to improve stability and weight balance on the truck floor. It is provided with 3 plastic check level eyes to monitor the water presence

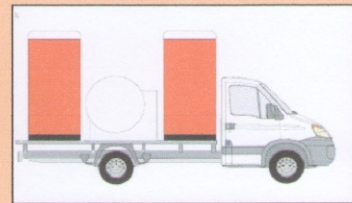

Hoses	Mod. 1000 mm	Mod. 1300 mm
Waste suction hoses lenght (No. 2)	9,50 m	12,50 m
Washing hoses lenght with automatic hose reel (No. 2)	10 m	10 m

The transversal type saves room on the truck wheelbase so it allows the transportation of four Armal toilets



Auxiliary engine	Honda mod. GX390
Cylinder capacity	389 cm ³
Power max.	8.2 KW @ 3600 rpm 11.0HP @ 3600 rpm
Torque max.	25.1 Nm @ 2500 rpm 2.56 kgm @ 2500 rpm
Consumption	3.7 l/h @ 3600 rpm
Fuel	Petrol
Ignition	Pull start with self winding (electric optional)
Battery	12 V – not available
Electrical system	12 V cc



Vacuum Module mod. 1000/1300 mm Transversal Technical Data Sheet

Further Characteristics of the Waste Suction System

Max. vacuum decompressor	- 0.89
Lubrication oil - decompressor:	ISO VG 100
Hoses:	Press. Max. 10 bar

Further Characteristics of the Washing Hydraulic System

Hoses	Press. max. 1120 bar
Combined operating	No

Dimensions	Mod. 1000 mm	Mod. 1300 mm
Tanks capacity	1100 l waste – 460 l water	2000 l waste – 640 l water
Length	1540 mm	2000 mm
Width	2105 mm	2105 mm
Height	1500 mm	1900 mm
Weight	670 kg	850 kg

Optionals

The machine may be fitted with systems and special installations according to the Customer's specific needs:

- a heating system for the water to be used to wash the inside and outside of the toilets, by means of a gas oil burning boiler. This unit heats the water coming from the tank before it is possibly mixed with detergent and pressurized to be sprayed through the guns.
- an electric-hydraulic radio control system for remote operating of the equipment using a radio transmitter/receiver.
- an odor abatement system composed of an electronic control unit operating an electric pump which vaporizes and emits a scented liquid into the drainage hoses of the decompressor to eliminate or reduce the production of unpleasant odors during the operating phases especially during suction of organic waste.



Vacuum modules are in compliance with EC Markings and supplied with EC conformity declaration

For further information, contact

ARMAL SRL Unipersonale
Società soggetta a direzione e coordinamento di Ylda spa

Via Fiorentina, 109 - 50052 Certaldo, Florence (Italy)
phone +39 0571 665 305 fax +39 0571 651 260

www.armal.biz - armal@armal.biz



Armal reserves the right to make any product change without prior notice
Vacuum Module mod. 1000/1300 mm Transversal Technical Data Sheet - Rev. 0 dd 19-11-2014