

PMMA Lenses



THE USIOL ADVANTAGE

Polymethyl methacrylate (PMMA)


Available in diopters
0.0 - 30.0 in 0.5 increments

UV-A absorbing

Computerized lathe-cut optics

Ethylene oxide dry gas sterilized

CE ISO 9001 EN 46001

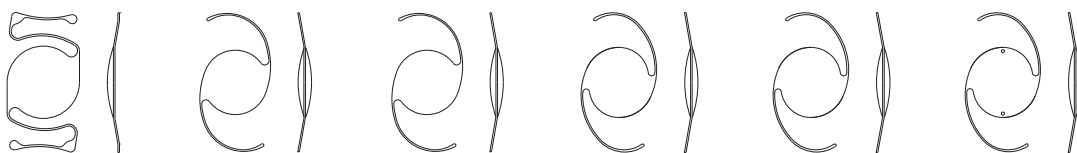

MODEL	601 UV	618 UV	628 UV	630 UV	635 UV/UV2	640 UV2
CHAMBER	Anterior	Posterior	Posterior	Posterior	Posterior	Posterior
OPTIC STYLE	Plano-convex	Biconvex	Biconvex	Biconvex	Biconvex	Biconvex
OPTIC SIZE	6.0mm	5.0mm	5.5mm	6.0mm	6.0mm	6.5mm
DIAMETRAL	12.5mm	12.0mm	12.0mm	13.0mm	12.5mm	13.0mm
HAPTIC STYLE	—	C	C	C	C	C
ANGULATION	0.5mm vault depth	10°	10°	10°	10°	10°
POSITION HOLES	0	0	0	0	0 / 2	2
"A" CONSTANT	115.3	118.2	118.2	118.4	118.4	118.5
ANTERIOR CHAMBER DEPTH	3.3mm	4.6mm	4.7mm	4.9mm	4.9mm	5.0mm

SHARING YOUR VISION



USIOL Inc | 2500 Sandersville Rd | Lexington KY 40511 USA
Toll Free (USA) 800.354.7848 | Fax 859.259.4926 | info@usiol.com

usiol.com | +1.859.259.4925

© 2014 USIOL Inc. All rights reserved.