

ASAHI Gaia

P T C A G U I D E W I R E


Not difficult

ASAHI Gaia

PTCA GUIDE WIRE


You guide the wire

1 Entry



Micro-cone tip

The micro-cone tip makes it easier to create the entry route to the hard tissue and fibrous cap.




ASAHI Gaia micro-cone tip




Conventional guidewire ball tip

Three different tip loads


Possibility to choose Gaia version depending on morphology of the lesion.

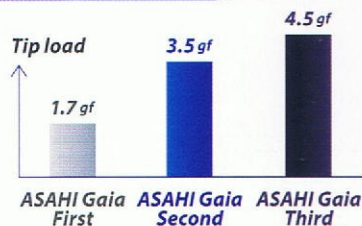

2 Deflection control



Flexible tip

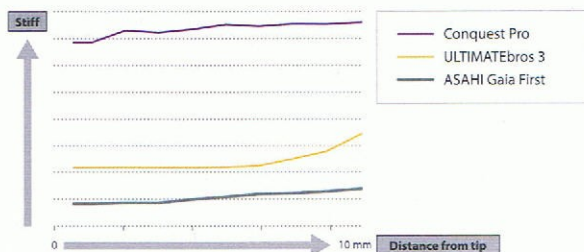

The above data was obtained by company standardized test, which may differ from industry standardized tests. The above data does not prove that all devices have exactly the same performance with the samples used for these tests.

ASAHI Gaia


By taking advantage of tip flexibility, ASAHI Gaia easily avoids hard tissue and advances smoothly.

Conventional stiff guidewire


A stiffer wire is less likely to deflect, causing it to proceed in a straight direction only.

1mm pre-shaped tip


The pre-shaping of the tip is incorporated in the production process, significantly increasing tip shape retention.




but different

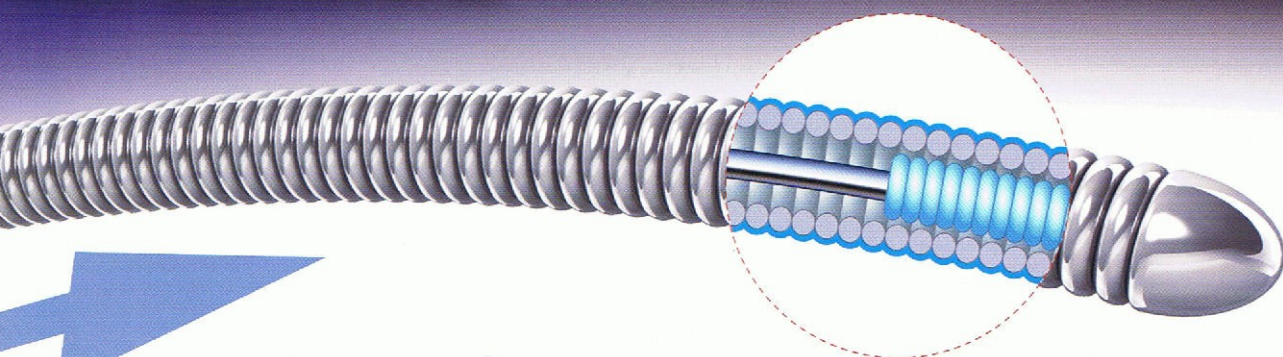

3 Directional control




Intentional manipulation

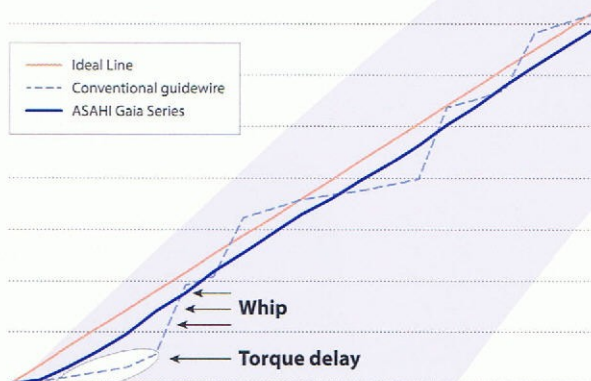

All the data were obtained by company standardized test, which may differ from industry standardized tests. All the data do not prove that all devices have exactly the same performance with the samples used for tests.

Enhanced torque response broadens possibility of intentional manipulation.



ASAHI Gaia


Efficient transmission of proximal rotation to the distal tip.



Conventional guidewire

Less efficient transmission of torque due to resistance, causing whip.

ACTONE: Over wrap of core wire




Spring coil

Core wire


ASAHI's unique guide wire technology with Composite Core

SION TECC 
Leading to the NEXT

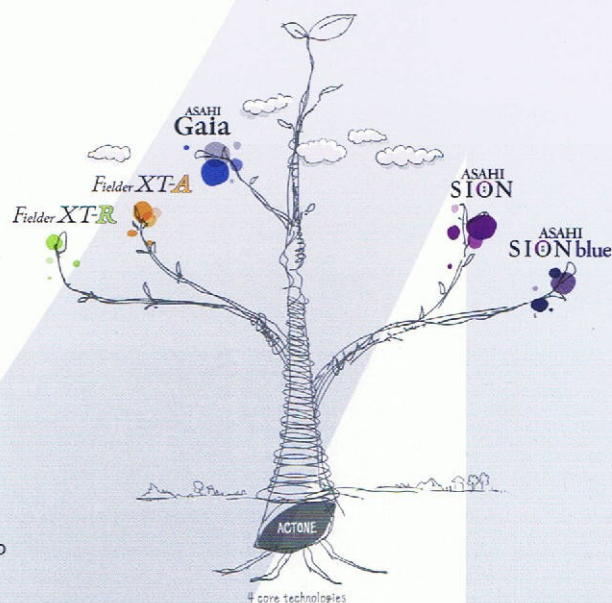

Ordering Information

■ Structure

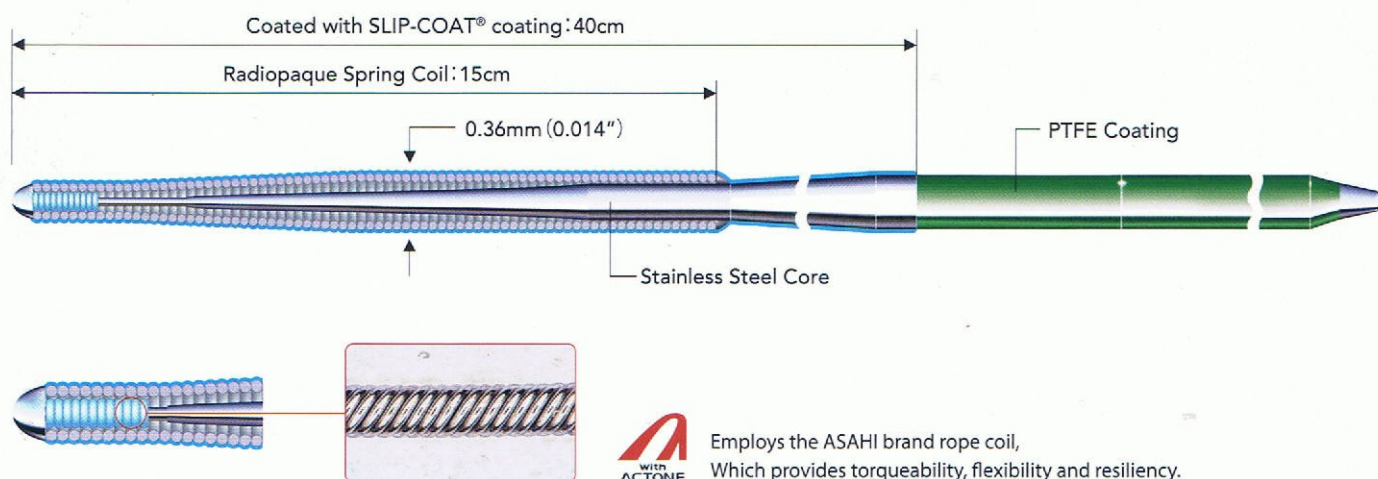

Employs the ASAHI brand rope coil,
Which provides torqueability, flexibility and resiliency.

Product	Catalog No.	Diameter	Coating Type	Usable Length	Spring Coil Length	Radiopaque Length	Tip Shape
ASAHI Gaia First	AHW14R007P	0.36/0.26mm (0.014/0.010inch)	SLIP-COAT®	190cm	15cm	15cm	1mm pre-shape
	AHW14R307P			300cm			
ASAHI Gaia Second	AHW14R008P	0.36/0.28mm (0.014/0.011inch)	SLIP-COAT®	190cm	15cm	15cm	1mm pre-shape
	AHW14R308P			300cm			
ASAHI Gaia Third	AHW14R011P	0.36/0.30mm (0.014/0.012inch)	SLIP-COAT®	190cm	15cm	15cm	1mm pre-shape
	AHW14R311P			300cm			

CE 0344

Coated with SLIP-COAT® coating.

ASAHI and ASAHI Gaia are trademarks or registered trademarks of ASAHI INTECC Co., LTD. in Japan and other countries.

Manufactured by:

Distributed by:

ASAHI INTECC

ASAHI INTECC CO.,LTD.

3-100 Akatsuki-cho, Seto, Aichi 489-0071 Japan

TEL:+81-561-48-5551 FAX:+81-561-48-5552

<http://www.asahi-intecc.com>