

DATA SHEET

IDENTIFIER 60 NOVUS

Desktop Passport Personalization



Machine Picture Sample Configuration



1. Available workstations

- Input
- Printer
- Printing RGB
- Laser
- Output with Reject

2. Dimensions

Module	Closed in					
	Height	mm Length	Depth	Height	inch Length	Depth
IDENTIFIER 60 NOVUS	588	3089	586,5	23,15	121,62	23,10
Table	835	3600	800	32,87	141,73	31,50
Total dimensions	1423	3600	800	56,02	141,73	31,50

Module	Opened in					
	Height	mm Length	Depth	Height	inch Length	Depth
IDENTIFIER 60 NOVUS	959	3089	586,5	37,76	121,62	23,10
Table	835	3600	800	32,87	141,73	31,50
Total dimensions	1794	3600	800	70,63	141,73	31,50

3. Weight


Module	in kg
IDENTIFIER 60 NOVUS	380
Table	270
Total dimensions	650



4. Facilities

Power Machine	Voltage:	230 V	Power – Connection: CEE 7/7 
	Tolerance:	± 10 %	
Typical noise	Protection:	10 A	Max. value emission sound pressure level Approx. 66,00 dB(A)
	Frequency:	50/ 60 Hz	
Production Environment	Consumption:	Approx. 0,90 kVA	Requirements Temperature: 23 °C ± 3 °C Humidity: 50 % ± 10 %

5. Machine Layout Plan

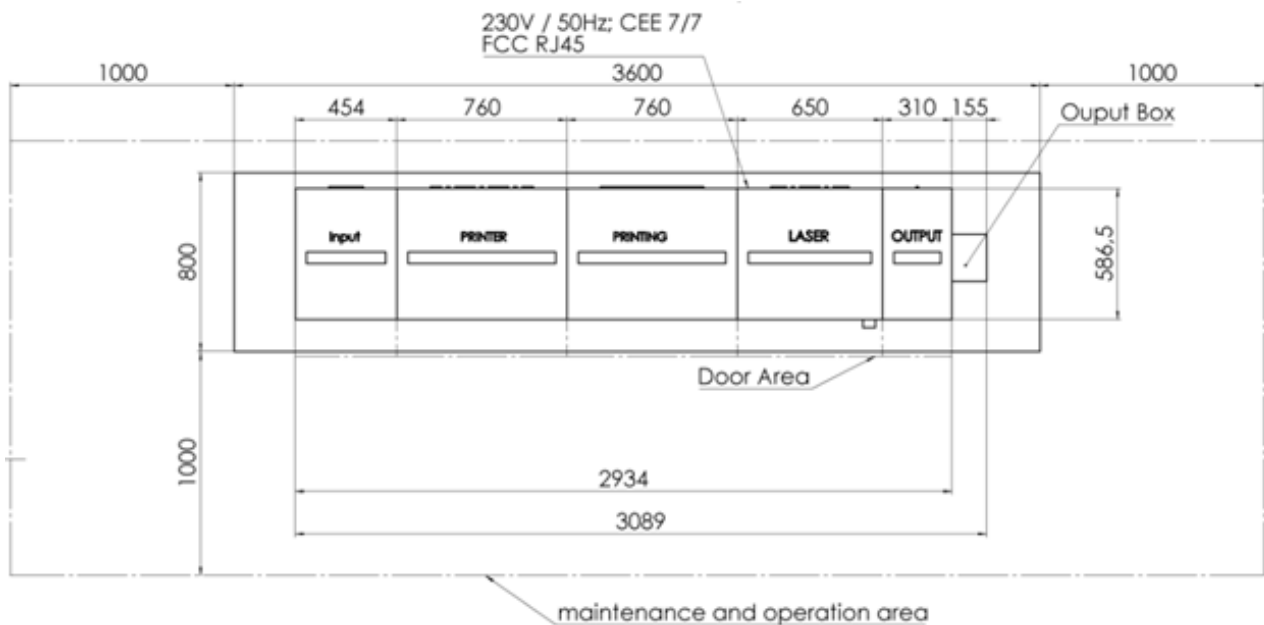

Room dimension with option: about 5600 x 2000 x h 2500 mm

