


Datenblatt

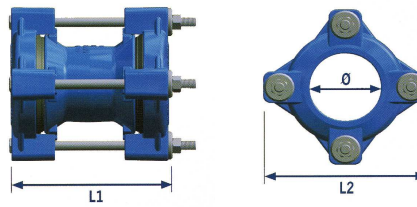

Hegawa FastFit Extra Wide Range Couplings
complete with EPDM gaskets, dacromet coated or
stainless steel bolts and nuts.
Epoxy coated (blue colour) 200 microns

Dimenzija DN	Opseg u mm	Sifra proizvoda	L1 u mm	L2 u mm	Težina kg/kom.
50	60-80	HEG-URCSL-2-S-E	186	190	6,50
60/65	70-90	HEG-URCSL-2.5-S-E	186	200	7,00
80	88-113	HEG-URCSL-3-S-E	186	223	8,00
100	107-132	HEG-URCSL-4-S-E	186	242	8,50
125	133-159	HEG-URCSL-5-S-E	206	269	10,00
150	159-184	HEG-URCSL-6-S-E	206	296	12,00
175	165-195	HEG-URCSL-7-S-E	222	317	14,50
200	194-226	HEG-URCSL-8-S-E	222	348	19,50
200	216-246	HEG-URCSL-8A-S-E	222	368	19,50
250	244-276	HEG-URCSL-10-S-E	242	398	23,00
250	266-297	HEG-URCSL-10-S-E	242	419	24,50
300	315-345	HEG-URCSL-12-S-E	242	469	26,50
300	345-375	HEG-URCSL-12A-S-E	242	499	32,00
350	375-405	HEG-URCSL-14-S-E	242	529	33,50
400	400-435	HEG-URCSL-16-S-E	292	565	46,00
400	435-470	HEG-URCSL-16A-S-E	292	600	51,00
450	475-510	HEG-URCSL-18-S-E	292	640	51,00
500	499-534	HEG-URCSL-20-S-E	292	665	60,00
500	530-565	HEG-URCSL-20A-S-E	292	695	60,00
500	575-610	HEG-URCSL-20B-S-E	302	695	63,00
600	610-645	HEG-URCSL-24-S-E	292	775	70,00
600	645-680	HEG-URCSL-24A-S-E	292	810	71,00
700	710-745	HEG-URCSL-28-S-E	300	895	85,00
800	810-845	HEG-URCSL-32-S-E	300	895	100,00
900	913-949	HEG-URCSL-36-S-E	300	1115	
1000	1016-1052	HEG-URCSL-40-S-E	300	1218	
1100	1108-1133	HEG-URCSL-44-S-E	300	1299	
1100	1142-1167	HEG-URCSL-44A-S-E	300	1333	
1200	1209-1234	HEG-URCSL-48-S-E	300	1400	
1200	1245-1270	HEG-URCSL-48A-S-E	300	1436	
1400	1412-1437	HEG-URCSL-56-S-E	300	1603	
1400	1452-1477	HEG-URCSL-56A-S-E	300	1643	

Material

Middle ring: Nodular cast iron GGG 50 to EN 1514, EN 1563, BS 6920
 Epoxy coated
 Followers: Nodular cast iron GGG 50 to EN 1514, EN 1563, BS 6920
 Epoxy coated

Bolts and nuts

Steel F-114 quality 8.8 to DIN 931, DIN 934, DIN 9021, Dacromet coated

Angle deviation

Minimum 4° per each side

Rubber gaskets

EPDM or NBR

Features

PN 10 or PN 16

Suitable for joining pipes of different rigid materials,
 such as cast iron, steel, asbestos cement, stainless steel, PVC, PE (insert required) and so on
 Suitable for use with sawage

Temperature range: -5°C-60°C

