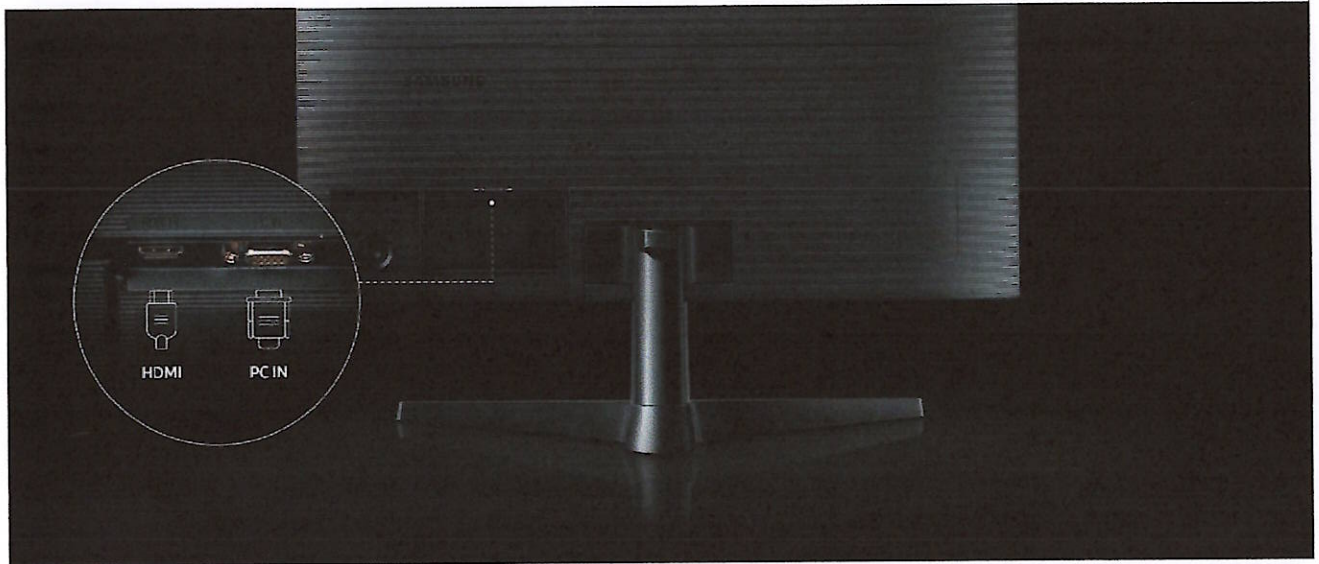


24" T35F Flat Monitor

HK\$1,480.00

[Features](#) [Spec](#) [Support](#) [Compare](#)

Specifications

Resolution	Aspect Ratio	Flat / Curved	Screen Size (Inch)
1,920 x 1,080	16:9	Flat	24

Display

Screen Size (Class)
24

Flat / Curved
Flat

Active Display Size (HxV) (mm)
527.04 × 296.46 mm

Aspect Ratio
16:9

Panel Type
IPS

Brightness (Typical)
250cd/m²

Brightness (Min)
200cd/m²

Contrast Ratio Static
1000:1(Typical)

Dynamic Contrast Ratio
Mega

Resolution
1,920 x 1,080



24" T35F Flat Monitor

HK\$1,480.00

[Features](#) [Spec](#) [Support](#) [Compare](#)**Color Support**
Max 16.7M**Color Gamut (NTSC 1976)**
72%**Refresh Rate (Hz)**
Max 75Hz**General Feature****Eco Saving Plus**
Yes**Eye Saver Mode**
Yes**Flicker Free**
Yes**Game Mode**
Yes**Image Size**
Yes**Windows Certification**
Windows 10**FreeSync**
Yes**Off Timer Plus**
Yes**Interface****D-Sub**
1 EA**HDMI**
1 EA**HDMI Version**
1.4**Operation Conditions****Temperature (°C)**
10°C~ 40°C**Humidity (%)**
10% ~ 80%, non-condensing**Design****Color**
DARK BLUE GRAY**Stand Type**
SIMPLE

24" T35F Flat Monitor

HK\$1,480.00

Features Spec Support Compare

Power

Power Supply
AC 100~240V

Power Consumption (DPMS)
0.5W

Power Consumption (Off Mode)
0.3W

Type
External Adaptor

Dimension

Set Dimension with Stand (WxHxD)
(mm)
539.2 x 425.3 x 232.0 mm

Set Dimension without Stand
(WxHxD) (mm)
539.2 x 322.8 x 39.4 mm

Package Dimension (WxHxD) (mm)
675 x 387 x 125 mm

Weight

Set Weight with Stand (kg)
2.7 kg

Set Weight without Stand (kg)
2.4 kg

Package Weight (kg)
4.0 kg

Accessory

Power Cable Length
1.5 m

HDMI Cable
Yes

Hide All Specs ^

Support



MK120 CORDED KEYBOARD AND MOUSE COMBO

MOUSE AND KEYBOARD COMBO

logitech



This durable duo brings together simplicity, comfort and corded security. A full-sized keyboard and ambidextrous mouse deliver a familiar, easy-to-use design that works right out of the box.

IDEAL FOR

Those who want corded simplicity in a familiar mouse and keyboard combo.

PRODUCT BENEFITS

KEYBOARD

- Full-size keyboard with number pad and arrow keys
- Spill-resistant design¹ up to 60 ml liquid
- Durable, easy to read keys
- 2 adjustable height options
- 10-Key Number pad
- Caps lock indicator light
- Deep profile key type
- Plastic parts include 54% certified post-consumer recycled plastic²

MOUSE

- Full size ambidextrous mouse
- 3 mouse buttons (Left/Right-click, Middle click)
- 1000 DPI optical tracking sensor
- Line-by-line scrolling
- Plastic parts include 72% certified post-consumer recycled plastic²

KEYBOARD & MOUSE

- Wired (corded) connectivity

SPECIFICATIONS

Certification	Global (list available upon request)
Compatibility	Windows® 7, 8, 10 or later
Connectivity	Cable, USB
Wireless Range	N/A (Corded)
Service Life	10 million clicks
Reliability	MTTF > 150K Hours Mean Time To Failure of electrical components
Warranty	3-year hardware limited warranty
Keyboard Battery	N/A (Corded)
Keyboard Battery Indicator	N/A (Corded)
Keyboard Layouts	See reverse
Keyboard Size	Full
Number of Keys	105
Number Pad	Yes (10 Keys)
Typing	Plunger
Tilt Legs	Yes
Tilt Angles	0° flat and 8° tilt
Backlit Keys	No
Illuminated Caps Lock	Yes
Illuminated Num Lock	Yes
Easy-Switch Keyboard	No
Mouse Battery	N/A (Corded)
Mouse Battery Indicator	N/A (Corded)
Mouse Tracking	Red LED Optical Tracking
Mouse Tracking DPI	1000
Mouse Scrolling	1D Roller
Mouse Handedness	Ambidextrous
Easy-Switch Mouse	No
Logitech Options	No
Logitech Flow	No
Product Weight	Keyboard 550 g, Mouse 90 g
Product Dimensions	Keyboard: 155 mm H x 450 mm W x 23.5 mm D Mouse: 113 mm H x 62 mm W x 38 mm D
Total Weight with Packaging	810 g
Packaging Dimensions	49 mm H x 163 mm W x 252 mm L
Sustainability	Mouse: 72% certified post-consumer recycled material ² Keyboard: 54% certified post-consumer recycled material ²
Master Shipper Units	4
Storage Temperature	-5 to 45°C
Operating Temperature	0 to 40°C
Software	N/A
Operating Instructions Location	N/A Corded Product
IT Admin Mass Deploy	N/A (Corded)



SVEN[®]
YOU WANT - WE CAN

2.0 Multimedia
Speaker System

OPERATION MANUAL



SVEN 235

www.sven.fi



ENG

SVEN[®]
YOU WANT – WE CAN

2.0 Multimedia
Speaker System

2. PACKAGE CONTENTS

- Active speaker — 1 pc
- Passive speaker — 1 pc
- Operation manual — 1 pc
- Warranty card — 1 pc

3. SAFETY PRECAUTIONS



Caution! High voltage inside! To avoid the risk of electric shock do not open or touch elements inside.

- To avoid electric shock, do not open the MSS and do not perform repairs by yourself. Service and repairs should be performed only by qualified specialists in an authorized service center. The list of authorized service centers is available on www.sven.fi.
- Do not allow the circuit of wires (including the grounded ones) between the speakers, on the power amplifier or the ground, for it causes damage to the power amplifier output stage.
- Do not touch the MSS power cord plug pins for 2 seconds after unplugging it from the mains.
- Do not put foreign objects inside the holes of the MSS.
- Protect the MSS from high humidity, water and dust.
- Protect the MSS from heating: do not place it closer than 1 m from a heat source. Do not expose it to direct sunlight.
- Do not place any open flame sources on or close to MSS.
- Do not place the MSS in poorly ventilated areas. Leave an air gap of 10 cm or more. When operating the MSS, do not put any devices on it, do not cover it with cloth or other objects preventing it from cooling.
- Do not use any chemical agents for cleaning. Clean it with dry soft cloth only.

4. TECHNICAL DESCRIPTION

Sven 235 Multimedia Speaker System 2.0 (MSS) is designed to play music and sound games, movies etc. MSS has built-in transformer power supply, acoustic and signal cable due to which it can be connected to virtually any audio source (CD/DVD-players, TV, PC, etc.). The speaker which has audio and control panel is named active one.

Special features

- Built-in transformer power supply
- Speaker system is compatible with PCs, DVD/Media-players, mobile devices and other sound sources
- Built-in signal cable with a 3.5 mm mini-jack to connect sound sources
- Volume control
- Power switch
- Headphone jack
- Plastic case of speakers



Operation Manual

SVEN 235

Control panel

- ① Power LED
- ② POWER: power switch
- ③ VOLUME: volume control knob
- ④ : headphone jack

5. PREPARATION AND OPERATION**Speaker placement**

- Place the speakers symmetrically to the listener at least one meter away.
- Place MSS far away from monitors and TV sets, as insignificant image distortion in these supersensitive devices is possible.

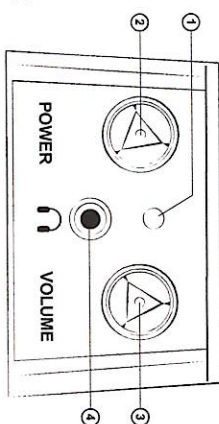


Fig. 1. Control panel

MSS Connecting

Sven 235 Multimedia Speaker System can be connected to virtually any audio source: DVD/CD, PC sound card, etc. (see Fig. 2).

- Before connecting, make sure that MSS is unplugged.
- Connect signal cable mini-jack 3,5 mm built-in active speaker to audio output of the sound source, as shown in Fig. 2. Use mini-jack to 2RCA adapter (not included) for connection of DVD-player, TV-set etc.
- Plug power cable (fig. 2) of active speaker into the mains outlet.
- Revolve VOLUME knob VOLUME ③ to the minimum; press the button POWER ② of the active speaker. Power LED ① will light up.

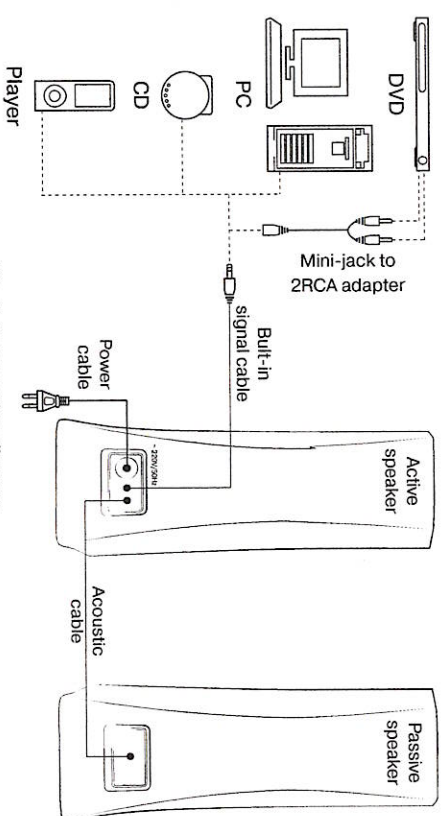


Fig. 2. Connection diagram



- Adjust the VOLUME knob VOLUME ③ to the necessary volume.
- Plug headphone into the headphone jack ④ (see fig. 1).

Notes:

- *After finishing operation with MSS, mind to unplug power cord of the device from the mains socket.*
- *To improve sound quality, use Line-Out output of sound card.*

6. TROUBLESHOOTING

Problem	Cause	Solution
The MSS does not turn on.	The MSS isn't connected to a mains outlet. The power switch is off.	Check the connection. Turn on the switch.
No sound or there is too quiet sound of speakers.	The volume level is set at minimum value. Improperly connected audio source.	Adjust the volume control knob. Connect audio sources correctly.
Distortion of sound.	Large amplitude of the input signal.	Turn down the source volume and the MSS volume.

If none of the above methods can solve the problem, please seek professional advice at your nearest service center. Never attempt to repair the product yourself.

7. TECHNICAL SPECIFICATIONS

Parameter, measurement unit	Value
Вихідна потужність (RMS), Вт	4 (2 × 2)
Frequency range, Hz	100 – 20 000
Speaker diameter, mm	50 × 90
Voltage supply, V/Hz	~ 220/50
Dimensions (one speaker) (W × H × D), mm	70 × 200 × 78
Weight, kg	0.59

Notes:

- *Technical specifications given in this table are supplemental information and cannot give occasion to claims.*
- *Technical specifications and package contents are subject to change without notice due to the improvement of SVEN production.*



Operation Manual

UP-L800E
UP-L1000E

6. TECHNICAL SPECIFICATIONS

Parameter, measurement unit	Value UP-L800E	Value UP-L1000E
Full power, VA	800	1000
Active power, W	400	510
Overload protection activation, % of rated power	110	
Input voltage, V	~175 – 290 ($\pm 3\%$)	
Output voltage, V	~230 (-14/+10%)	
Frequency (input/output), Hz	50/50	
Number of phases	1	
Operation mode	Continuous	
Output voltage waveform	Stabilization mode	Sinusoidal
	Battery operation mode	Sine wave
Protection	Stabilization operation mode	Against overload, short-circuit
	Battery operation mode	Discharge, overload, short-circuit
Type of cooling	Passive	
Acoustic signals	ON/OFF, battery mode, overload	
Switch over time, ms	≤ 10	
Battery: internal cabinet (supplied in the UPS set)	Type	Maintenance free sealed lead-acid batteries
	Voltage, V	12
	Capacity, A ^h h	7 9
Ambient temperature in operation mode, °C	from 5 to 40	
Relative humidity, %	10 ~ 90, without condensation	
Dimensions, mm	185 × 95 × 280	
Weight, kg	4.7	5.9

Notes:

- The presented technical specifications are referential and cannot be used as grounds for any claims.
- TM SVEN products are constantly being improved. On this ground, the technical specifications and completeness can be altered without prior notice.

