

i3BOARD 8705 DUO

Compared to traditional whiteboards, the i3BOARD includes several unique features. Other than stylus and finger touch recognition, the precise and reliable V-Sense touch technology design allows multi-user interaction with 20 simultaneous touches.

The ultra-narrow aluminium frame gives the i3BOARD a sleek appearance and makes maintenance easy, lowering the long term total cost of ownership.



INTERACTIVE

- Touch recognition: Finger, stylus or any other pen or finger shaped object
- High response speed
- i3DUO Surface: the optimized whiteboard surface with superior projection, writing & dry erasing capabilities.

INSPIRING

- Widescreen 87 inch whiteboard surface
- Up to 20 touch points
- Ultranarrow 24mm frame
- Platform independent, a perfect match for any education software

INTEGRATED

- Easy maintenance
- Standard wall-mount included
- Dust resistant V-Sense touch technology
- Lifetime warranty on ceramic steel surface



**EXTENDED WARRANTY
EDUCATION EXCLUSIVE**

Up to 5 years. Only valid after registration
on www.i3-technologies.com

SPECIFICATIONS

Physical Specifications	Model name	i3BOARD 8705 DUO
	Size	87"
	Display Aspect Ratio	16 : 10
	Dimensions i3BOARD	1948 x 1224 x 37 mm - 76.7" x 48.6" x 1.5" (WxHxD)
	Dimensions active area	1899 x 1186 mm - 74.8" x 46.7" (WxH)
	Writing surface	i3 Duo Surface The optimized whiteboard surface with superior projection, writing & dry erasing capabilities. Minimize hotspot, less reflectivity from natural light & minimal ghosting
	Touch technology	V-Sense ^{FC} Multi-touch
	Touch operation	Any opaque object, including finger, stylus...
	Touch point	20 simultaneous touches (Depending on Operating System)
	Resolution	32767x32767
	Bezel Color	Black
	Power supply	USB
	Install method	Wall mount included
	Weight net	24 kg
	Weight packed	30 kg
	Packaging size	2085 x 1355 x 120 mm (WxHxD)
	Operating temperature	-15 ~ 50 °C (5~122F)
	Operating humidity	20 ~ 90 %
	Storage temperature	-40 ~ 50 °C (-40 ~ 122 F)
	Storage humidity	10 ~ 95 %
	Power consumption	≤ 350mA
Recommended Computer Configuration	CPU	> 3.4GHz . X86
	RAM	> 4GB
	Hard disk	> 100GB
	Interface	USB 2.0 or above
	Screen resolution	1280 x 800
Accessories	Standard accessories	USB cable, pens, pen tray
	Annotation software	i3LEARNHUB Free licence - registration on i3learnhub.com
Warranty	Standard	3 years
	after registration	5 years

OPTIONAL ACCESSORIES:



i3HAWM
height adjustable wall mount system



i3PROJECTOR
Lamp or Laser projectors



i3COMPUTER
Compact 24/7 PC




i3ADD-ON Whiteboard Extensions
whiteboards wings for extra writing surface



i3SPEAKERS
active speaker system

TECHNICAL DRAWING

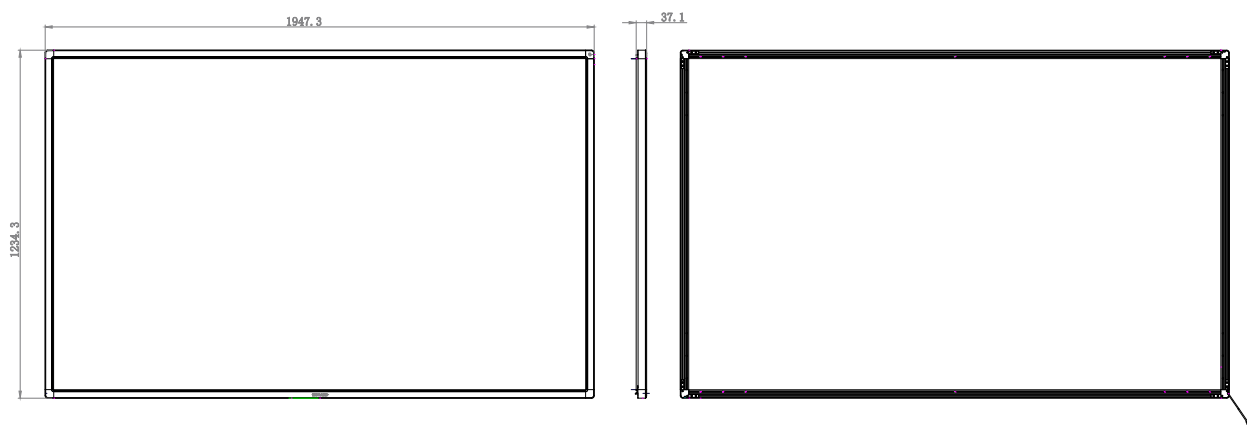

AUTHORISED DISTRIBUTOR



i3PROJECTOR 3303W

i3PROJECTOR 3303W is a 3300-lumen ultra short throw projector that packs a multitude of features while delivering an extremely short throw distance for education and corporate applications. With its ability to be mounted to the wall directly above the screen on which it projects, this model helps to eliminate the shadows and glare typically found with standard projection systems. The 3303W includes a powerful 10W speaker, and its input panel includes dual HDMI, VGA and a microphone input to amplify the presenter's voice.

Because of its internal mirror, the i3PROJECTOR 3303W has a more compact design and the mirror is dust & scratch resistant.

MAIN FEATURES

- Ultra short-throw projector
- Compact design
- Internal mirror: no dust & scratches possible
- Affordable lamp
- 3300 lumens *
- WXGA 1280x800
- Aspect ratio 16:10
- Auto source
- Lamp life 5.000hrs (eco mode)
- Speaker 10W
- DLP technology



EXTENDED LAMP WARRANTY EDUCATION EXCLUSIVE


Up to 3 years. (max. 2000 hours). Only valid after registration on www.i3-learning.com



i3-TECHNOLOGIES

SPECIFICATIONS

Model name	i3PROJECTOR 3303W
Native Resolution	1280 x 800
Lamp	260W UHP Lamp
Brightness	3300 lumens*
Lamp life time (Normal/ Eco)	3500hrs/5000hrs (eco)
Contrast	15000:1
Offset Distance Tolerance	25mm
Lens/Zoom	
Throw ratio	Sealed design, anti-dust, anti-scratch
Image size (Diagonal)	TR 0.27 85" - 115"
Color wheel	6 segments
Acoustic Noise	Full mode: 35 ±2dB(A), Eco mode: 30 ±2dB(A)
Operation Temperature	For 0 -- 2500 ft, 5 -- 40 °C For 2500 -- 5000 ft, 5 -- 35 °C For 5000 -- 10000 ft, 5 -- 30 °C
Input	VGA X 1 - Audio Jack X 1 - Composite Video X 1 - Composite Audio X 1 HDMI X 2 - Microphone X 1 - RS-232C X 1 - Mini USB-B X 1 - RJ45 X 1 USB-A X 1 - Power X 1
Output	VGA X 1 - Phone Jack X 1(for interactivity) - Audio Jack X 1
No. of Colors	1.07B
Speaker	10W x1
Keystone	Manual keystone
OSD Languages	18 (English / German / French / Italian / Spanish / Polish / Swedish / Dutch / Portuguese / Japanese / Traditional Chinese / Simplified Chinese / Korean / Russian / Arabic / Norse /Turkish
Power Supply	Universal AC 100 – 240 V ~ 50-60 Hz with PFC input
Power consumption	320W (normal) - 270W (eco)
Standby Power	< 0.5W
Remote Control	IR
Dimension	Width x Depth x Height = 383mm x 308mm x 86mm
Weight	5.5kg (12.1lb)

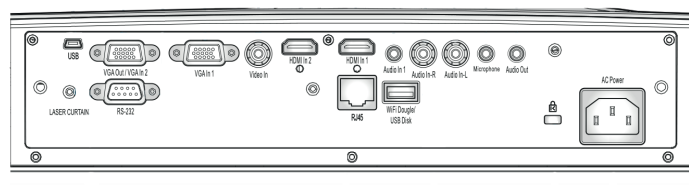

ACCESSORIES

Power cord	1	1.8m
VGA cable	1	1.8m
Remote Control	1	Card type, with battery
Documentation	1	User manual in 18 languages"

Without lens cap, without soft case

WARRANTY

Projectors 3 years
Lamp 6 months, max. 1000 hrs

** referring to marketing measurements*



AUTHORISED DISTRIBUTOR

