

DESCRIEREA TEHNICA

Specificarea tehnică solicitată	Specificarea tehnică solicitată CASE 570SV nou, producție Italia/India
Motorizare: Diesel, minim 4 cilindri, Turbocharged, putere netă nominală minim 68 kW (aprox. 92 CP). Cuplu maxim min. 400 Nm. Norma de poluare Euro 3 sau echivalent conform reglementărilor UE. Transmisia: Integrală 4x4, cutie de viteze tip Power Shuttle sau Power Shift, minim 4 viteze înainte / 4 înapoi. Viteză maximă de deplasare minim 25 km/h. Utilaj față atașat: Cupă multifuncțională (6-în-1) cu volum minim 1.0 m.c. Deschidere/încărcare comandată hidraulic, cu funcții de încărcare, dozare, nivelare, apucare și planificare. Utilaj de excavare: Braț telescopic cu adâncime de săpare min. 5.4 m. Dotat cu cuplă rapidă și 2 cupe de excavare (lățime 400 mm și 800 mm). Sistem Hidraulic: Sistem cu debit variabil sau divizat, capabil să asigure un flux minim cumulat de 130 l/min și o presiune de lucru de minim 250 bar, garantând operarea simultană și independentă a funcțiilor de excavare și încărcare fără pierderi de viteză. Cabină și Eficiență: Protejată la răsturnare și căderea obiectelor (ROPS/FOPS), închisă, vizibilitate 360°, climatizată (A/C și încălzire). Dotată cu sistem electronic de management al turației motorului pentru optimizarea consumului de combustibil (funcție de operare economică sau echivalent). Dotări și Tehnologie: Comenzi ergonomice tip pilot/joystick sau pârghii servo-asistate (standard ISO), computer de bord, stabilizatoare hidraulice individuale, scaun cu suspensie reglabilă, sistem de monitorizare GPS integrat, manual de întreținere în limba română. Garanție 12 luni	Motorizare: Diesel 4 cilindri, 92 c.p.; 420Nm Euro3 Transmisia: Integrala 4x2/4x4 Power Shuttle 4 viteze înainte/înapoi 26-40 km/oră; Utilaj față atașat: cupa maxilară multifuncțională, volum min.1,0m.c (6-în-1, deschidere/încărcare comandată hidraulic, cu posibilitatea transformării în lamă de buldozer, lamă de nivelare, planificare, grefier. Utilaj de excavare: Braț telescopic cu adâncimea de săpare 5514 m; 2 cupe, lățimea de 400, 800 mm, Sistem Hidraulic: Sistem cu debit variabil, capabil să asigure un flux minim cumulat de 140 l/min și o presiune de lucru de minim 210 bar, operarea simultană și independentă a funcțiilor de excavare și încărcare fără pierderi de viteză. Cabina di Eficienta: Protejată la răsturnare și căderea obiectelor închisă, vizibilitate 360°, climatizată (A/C și încălzire). Dotată cu sistem electronic de management al turației motorului pentru optimizarea consumului de combustibil (funcție de operare economică Dotări și Tehnologie: Comenzi ergonomice tip pârghii servo-asistate (standard ISO), computer de bord, stabilizatoare hidraulice individuale, scaun cu suspensie reglabilă, sistem de monitorizare GPS integrat, manual de întreținere în limba română. Da Garanție 24 luni sau 1000 moto/ore.

Ofertant
SRL Polimer Gaz Conducte

EXCAVATOR- ÎNCĂRCĂTOR

Case 570SV



Asistent universal pe șantier

EFICIENȚĂ RIDICATĂ

Motoarele FTP, având o putere și un cuplu ridicate, asigură cele mai bune caracteristici de funcționare din clasa lor, indiferent de tipul de lucrări efectuate, ceea ce, la rândul său, reduce costurile de exploatare la cea mai bună valoare din clasa lor.



ÎNTREȚINERE TEHNICĂ SIMPLĂ ȘI SIGURĂ



Accesul ușor la spațiul de sub capotă și dispunerea bine gândită a componentelor principale permit efectuarea rapidă a întreținerii programate.

CARACTERISTICI

MOTOR

Producător / Model	S8000 BS-3/Fiat Powertrain Technologies
Număr de cilindri	4
Tip	Diesel cu turbocompresor
Volum motor	3 900 cm ³
Putere maximă	96 C.P (72 kW) 1300 rpm
Cuplu maxim	420 Nm (1300 rpm)

CUTIE DE VITEZE

Tip	Powershuttle
Număr de trepte (înainte/înapoi)	4/4
Viteză de deplasare (înainte/înapoi)	40/25km/h

SISTEM HIDRAULIC

Tip	Pompă cu două angrenaje
Cuplare rapidă	DA
Capacitate	145 l/min la 2000 rpm
Presiune maximă	210 bar

SISTEM DE FRÂNARE ȘI PUNȚI

Sistem de frânare de serviciu	Cu acționare hidraulică de la pedală, 2 discuri pe fiecare parte
Frână de staționare (baie de ulei)	Mecanism de frânare mecanic
Unghiul de oscilație al punții față	±16°
Blocarea diferențialului punții față	NU
Blocarea diferențialului punții spate	NU

Rezervoare

Rezervor de combustibil	129 l
Sistem de răcire	20 l
Ulei hidraulic	107 l
Ulei de motor	8,6 l
Cutie de viteze	20 l
Punte față	8,9 l
Punte spate	17,1 l

CABINA

Pentru siguranța dumneavoastră, cabina respectă standardele

Protecție împotriva obiectelor căzătoare (FOPS)	ISO EN3449
Protecție împotriva răsturnării (ROPS)	ISO EN13510

ECHIPAMENT

Aer condiționat	Da
Tip de control	Brațe
Sistem de rotire a cupei la un unghi 90*	Da
Conducte hidraulice (pentru echipamente atașate)	DA
Sistem de stabilizare a încărcătorului (Ride control)	NU
Cupă multifuncțională	6x1
Cupă spate	600 mm &800 mm
Sistem de cuplare rapidă	Da
Radio	Da
Sistem de amortizare la lucrul cu excavatorul	NU
Set de scule	Da
Braț telescopic	Da
Iluminare de lucru (4 în față/4 în spate/câte unul în stânga și în dreapta)	Da
Sistem de urmărire prin satelit (SiteWatch)	Da
Roți	Da
Furci pentru lucrări speciale	Diferite dimensiuni
	NU

MASĂ ȘI DIMENSIUNI

Greutate	
Lungime (transport)	8 558 kg
Lățime (transport)	5 990 mm
Înălțime la brațul excavatorului (în poziție de transport)	2 277 mm
Înălțime (la cabină)	3 800 mm
Ampatament	2 830 mm
	2 175 mm

Tipul brațului spate:

Raza de acțiune a brațului la nivelul solului

Telescopic ,cu geometrie liniară: 7024mm

Adâncimea de săpare(max.): 5892mm

Înălțimea de lucru(max): 6405mm

Unghiul de rotație al cupei

204°

Tipul brațului stivuitorului

Tip direct

Capacitate de încărcare (la nivelul solului)

5425 kg

Capacitate de încărcare (la înălțimea maximă)

3425 kg

Înălțimea de descărcare (la un unghi al cupei de 45°)

2745 mm

Înălțimea de descărcare (pe degetul de montare al forjei)

3580 mm

Unghiul de descărcare

45°





CASE
CONSTRUCTION

V-SERIES BACKHOE LOADERS



570V | 570SV

ACROSS HISTORY



1842

CASE is founded.

1869

The first CASE portable steam engine - road construction is born!

1957

CASE produces the first ever factory integrated backhoe loader.

1959

CASE TLB 420 is the first diesel powered model.

1964

CASE is the first manufacturer to develop an extendable dipper, the patented CASE Extendahoe.

1999

CASE is the first company to offer a powershift transmission on a backhoe loader.

2000

CASE is the first company to offer a backhoe integrated quick coupler.

2001

CASE M series backhoe is listed in "Construction Equipment" magazine among the top 100 products.

2005

CASE produces its 500,000th backhoe.

2012

CASE achieves Tier 4 emissions standards while delivering best-in-class breakout force and lift capacity.

2016

CASE backhoe offering is extended with the introduction of "In-Line cylinders" backhoe and "Straight-Loader arm" options.

2017

CASE introduces a Tier 4 final fully customizable backhoe.

2019

60th year milestone. Future in the making.

2020

CASE presents in North America the industry's first Fully Electric Backhoe Loader (model 580 EV).

2021

CASE introduces a Stage V backhoe loader in Europe with a brand-new cab, bringing operator comfort to the next level.

2023

CASE completes the introduction of the V-Series on all markets.

V-SERIES BACKHOE LOADERS

THE KINGS

CASE BACKHOE LOADERS

The original, ready for anything

Since introducing the first ever integrated backhoe loader in 1957, CASE has always been a front runner in the tractor loader backhoe industry.

We have built a strong heritage of industry firsts, best-in-class performance and components, supremely reliable and well-proven technology, and productivity-boosting solutions.

- + We accepted no compromise on performance: the S8000 FPT engine maintains best-in-class power and torque density.
- + The FPT engine is designed to optimize fuel consumption during production and travel especially in backhoe digging applications.

We did not limit our efforts to power and performance: with the V-Series we have taken operator comfort to the next level!

- + New cab with improved ergonomics
- + Entirely new interior and exterior cab styling

It's time to enhance our Customer's experience with the NEW V-SERIES BACKHOE LOADERS.



MAIN REASONS TO CHOOSE THE V-SERIES



BACKHOE DESIGN

The in-line design of the backhoe delivers a high performance in lifting capacity, digging depth and digging force. The closed center hydraulic system (570SV) and high-flow oil pump contribute to the backhoe loader's high productivity.



EXTENDAHOE

In operations where digging depth is crucial or the ability to dig away from the machine is needed, the Extendahoe is the perfect solution: it extends the backhoe's capacity to a level comparable to a mid-size excavator.



HIGH EFFICIENCY

With its high torque, the S8000 FPT engine delivers a powerful performance in all backhoe and front loader applications maintaining low fuel consumption.



POWERSHUTTLE TRANSMISSION WITH TORQUE CONVERTER

The powershuttle transmission with torque converter delivers smooth cycles and stall-free operation, while the electro hydraulic reversing and cutoff button ensure comfortable and fast travelling.



NEW CAB DESIGN

The cab has been redesigned around the operator to provide a comfortable work environment with ample storage space, and improved styling, fit and finish.



STRAIGHT LOADER ARM

The CASE loader pushes the limits of productivity with its massive loading capacity and superior tipping height. When lifting the bucket, the self-levelling function enhances the operator's productivity, precision and comfort.



SAFE AND EASY MAINTENANCE

Maintenance operations are fast with main check points easily accessible from the ground thanks to the front tilting engine hood and the perfect layout of the components.



FAST LOADING CYCLE

The return-to-dig function automatically repositions the loader with precision, enabling the operator to control loading operations easily and efficiently.

V-SERIES

BACKHOE LOADERS



NEW CAB DESIGN

FEATURES

- + **NEW** Restyled interior and exterior
- + **NEW** Front and left hand consoles design
- + **NEW** Noise level reduction
- + **NEW** Layout of switches and controls
- + **NEW** Best-in-class internal storage capacity that includes lockable compartments, bottle/cup holder, cooling box and open trays
- + **NEW** Excellent 360° Visibility
- + Mechanical suspended seat
- + Powerful Air Conditioning and fully openable windows

BENEFITS

- Greater operator comfort and improved ergonomics
- Superior cab accessibility
- A quiet place to work!
- Easy reachability in both loader and backhoe position
- A place to store every item and to keep your lunch and drinks always fresh
- More productivity and safety on the job site and in the street
- Premium operator comfort
- Excellent cab ventilation

OPERATOR COMFORT

TO THE NEXT LEVEL



CAB FEATURES FOR A MORE PLEASANT OPERATOR ENVIRONMENT

FEATURES

- + **NEW** Speedometer
- + **NEW** Cell-phone holder
- + **NEW** 12V and USB ports

BENEFITS

- Located on front console, more safety when driving
- Located on right hand pillar, within easy reach in any position
- Conveniently located on the right-hand console

V-SERIES

BACKHOE LOADERS

EXTENDAHOE

More capacity, more flexibility, easier to transport

The extendahoe has all the strength of the standard dipper and, on top of this, increases the overall capacity of the backhoe loader to match that of a mid-size excavator – with the added advantages of greater flexibility and ease of transport.

BACKHOE DESIGN

A strong heritage in high-performance backhoe design

The backhoe is shaped to deliver greater digging ability and lifting capacity with high breakout force. The boom and dipper are built for durability and reliability, with ultrasound inspection ensuring the high quality of the welding. The closed center hydraulic system and high-flow oil pump ensure fast cycles in excavating and loading applications.



FAST LOADING CYCLE

Effortless loading

The return-to-dig function reduces the operator's effort by automatically repositioning the bucket flat to the ground, ready for a new cycle. The operator gets the job done faster, and with much reduced fatigue.

HIGH PERFORMANCE WITH LOW OPERATING COSTS

STRAIGHT LOADER ARM

Maximize the productivity

The straight loader arm has been designed using an innovative systems integration approach to optimize line routings, ensure excellent visibility and provide best-in-class tipping height, meeting the most demanding customer needs in loading applications.



SAFE AND EASY MAINTENANCE

One side engine serviceability

The easy serviceability due to the ample access area available when opening the tiltable front engine hood, is a guarantee of CASE backhoe loader machine design.

The machine layout is optimized to provide easy access to all the main components.

All fuses and relays are comfortably located in the cab for easy and fast maintenance operations.

V-SERIES

BACKHOE LOADERS

POWERSHUTTLE TRANSMISSION WITH TORQUE CONVERTER

Smooth operation

The powershuttle transmission, with 4 forward and 4 reverse speeds, features hydraulically shifted clutches that enable the operator to change direction and travel speed on the go. The modulation valves ensure smooth changes in speed and direction. When working in muddy conditions, the 4WD delivers the extra traction needed. The 4WD models are designed for extreme applications and deliver reliable performance over an extended life cycle.



VERSATILITY FOR HIGH PRODUCTIVITY



HIGH EFFICIENCY

A legacy of high performance

A backhoe loader's power and performance are key to its success on the jobsite. At the heart of the V-Series is the proven S8000 engine that delivers the power and fast response times needed in the most demanding applications. Developed by FPT Industrial, this 3.9-liter, 4-cylinder engine is turbocharged and aftercooled, and features a mechanical injection system.

The S8000 engine family has built a strong reputation for performance, economy and reliability. With more than 3,000,000 units at work across the world, it has proven its value in a wide variety of applications and operating conditions.

FPT Industrial: technological partner

The S8000 engine for CASE loader backhoes is manufactured by FPT Industrial on a dedicated state-of-the-art assembly line to the highest quality standards. Every single unit undergoes rigorous testing and quality checks at every stage of the production process. Components are supplied by world leading components manufacturers, guaranteeing the highest quality for excellent reliability and durability.

Engineered for fuel efficiency

The S8000 engine features a Charge Air Cooler, which optimizes air induction, delivering excellent fuel efficiency during production and travel – and, in particular, in backhoe digging applications.








570V-570SV

MAIN SPECIFICATIONS

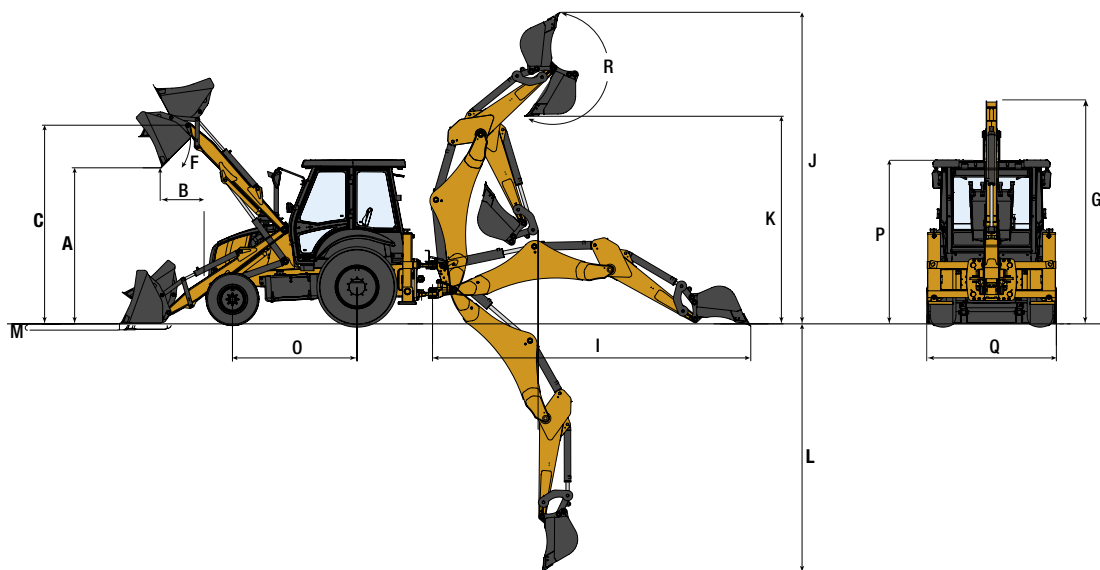

570V						570SV				
			STRAIGHT LOADER ARM		TOOL CARRIER LOADER ARM		STRAIGHT LOADER ARM		TOOL CARRIER LOADER ARM	
LOADER (4WD CONFIGURATION)			STD BUCKET	4X1 BUCKET	STD BUCKET	4X1 BUCKET	STD BUCKET	4X1 BUCKET	STD BUCKET	4X1 BUCKET
A	Maximum dump height under bucket @ 45°	mm	2720	2745	2640	2652	2720	2745	2640	2652
B	Dump Reach @ full height	mm	760	669	855	835	760	669	855	835
C	Maximum height pin	mm	3580		3420		3580		3420	
F	Dump angle	°	45		45		45		45	
M	Below ground level digging depth	mm	110	100	150	164	110	100	150	164
	Maximum lifting capacity @ full height	kg	3425		3934		3425		3934	
	Loader breakout force	daN	6192		5703		6192		5703	
	Bucket breakout force	daN	6129		7352		6129		7352	
			IN-LINE CYLINDER				IN-LINE CYLINDER			
BACKHOE			STD DIPPER	EXT. DIPPER	STD DIPPER	EXT. DIPPER	STD DIPPER	EXT. DIPPER	STD DIPPER	EXT. DIPPER
	Backhoe size	ft	14'		15'		14'		15'	
	Swinging angle	°	180				180			
I	Maximum reach from swing center	mm	5657	6739	5927	7024	5657	6739	5927	7024
J	Maximum operating height	mm	5489	6220	5675	6405	5489	6220	5675	6405
K	Maximum loading height	mm	3644	4387	3820	4548	3644	4387	3820	4548
L	Maximum digging depth	mm	4400	5584	4700	5892	4400	5584	4700	5892
R	Bucket rotation	°	204				204			
	Bucket breakout force	daN	5606	5616	5616		5606	5616	5616	
	Dipper breakout force	daN	4286	2931	3780	2696	4286	2931	3780	2696
OVERALL DIMENSIONS										
G	Boom height (transport position)	mm	3800				3800			
O	Wheel base	mm	2175				2175			
P	Cab height	mm	2830				2830			
Q	Overall width with std loader bucket	mm	2277				2277			
	Minimum ground clearance	mm	380				380			

Operating weight range Kg 7730 - 8290 7730 - 8290

Operating weight is subject to machine configuration and attachment options

OPTIONAL LOADER BUCKETS			OPTIONAL BACKHOE BUCKETS		
	570V	570SV		570V	570SV
TYPE	CAPACITY (SAE LTR)		TYPE	CAPACITY (SAE LTR)	
Standard bucket w/t bolt on teeth	1000	1000	Backhoe trenching	80	80
4x1 bucket w/t bolt on teeth	1000	1000	Backhoe trenching	120	120
6 x 1 bucket w/t bolt on teeth	-	1000	Backhoe trenching	180	180
Standard bucket w/t bolt on teeth	1100	1100	Backhoe trenching	260	260
Standard bucket w/t bolt on teeth	1200	1200	Backhoe trenching	300	300

ENGINE		570V	570SV	
Make and Model	S8000 BS-3 Certified-8045.45.745		S8000 BS-3 Certified-8045.45.748	
Injection system	Direct Injection, Turbo charged Intercooler		Direct Injection, Turbo charged Intercooler	
Emissions level	Tier 3		Tier 3	
# of cylinders	4		4	
Bore / Stroke	104 mm x 115 mm		104 mm x 115 mm	
Displacement / Compression ratio	3.9 L		3.9 L	
Rated Power Gross (ISO 14396)	86 hp (64 kW) @ 2200 rpm		97 hp (72 kW) @ 2200 rpm	
Rated Power Net (ISO 14396)	83 hp (62 kW) @ 2200 rpm		94 hp (70 kW) @ 2200 rpm	
Maximum torque (ISO 14396)	394 Nm @ 1300 rpm		420 Nm @ 1300 rpm	
Engine speeds	2200 rpm (rated speed @ full load)		2200 rpm (rated speed @ full load)	
TRANSMISSION				
Type	Manual shift, 4 speed, Fully sync.		Manual shift, 4 speed, Fully sync.	
Model/Make 2WD	Carraro 2WD TLB1		Carraro 2WD TLB1	
Model/Make 4WD	Carraro 4WD TLB1		Carraro 4WD TLB1	
	16.9-28, 12 PR Rear Tires		16.9-28, 12 PR Rear Tires	
Forward travel speeds	6.2 - 10 - 20.7 - 39.2 km		6.2 - 10 - 20.7 - 39.2 km	
Reverse travel speeds	7.4 - 12 - 24.8 - N/R* km		7.4 - 12 - 24.8 - N/R* km	
FRONT AXLE				
Model/Make 2WD	CNH PS 1300		CNH PS 1300	
Oscillation 2WD	21°		21°	
Model/Make 4WD	Carraro 26.17 M		Carraro 26.17 M	
Oscillation 4WD	16°		16°	
REAR AXLE				
Model/Make	Carraro 28.32 M		Carraro 28.32 M	
BRAKES				
Service brakes	Hydraulic foot operated, 2 discs per side		Hydraulic foot operated, 2 discs per side	
Parking brakes	Mechanically actuated caliper type brake pack on rear axle input shaft		Mechanically actuated caliper type brake pack on rear axle input shaft	
STEERING				
Type	Hydrostatic with integrated top valve		Hydrostatic with integrated top valve	
System pressure / Displacement	140 bar / 125 cc		140 bar / 125 cc	
Turning circle, diameter	2WD	4WD LH/RH	2WD	4WD LH/RH
with brake (outside wheels)	6 m	8.0 / 7.5 m	6 m	8.0 / 7.5 m
without brake (outside wheels)	8.4 m	9.4 / 8.8 m	8.4 m	9.4 / 8.8 m
TIRES				
Front	16" or 18"		16" or 18"	
Rear	25" or 28"		25" or 28"	
HYDRAULIC SYSTEM				
Type	Load sensing, open center hydraulic system w/o unloader		Load sensing, closed center hydraulic system	
Flow @ 2200 rpm	123 l/min		145 l/min	
Pressure	205 bar		205 bar	
SERVICE CAPACITIES				
Engine oil	8.6 l		8.6 l	
Transmission oil	20 l		20 l	
Front axle 4WD oil	8.9 l		8.9 l	
Rear axle oil	17.1 l		17.1 l	
Hydraulic oil	107 l		107 l	
Fuel tank	129 l		129 l	
Coolant	20 l		20 l	
ELECTRICAL SYSTEM				
Voltage	12 V		12 V	
Battery	Single: 130 Ah 720 A		Single: 130 Ah 720 A	
Alternator	120 A		120 A	
CAB				
Certification	ROPS / FOPS		ROPS / FOPS	
Air Conditioning	Optional		Optional	
Speedometer	Standard		Standard	

* Not Recommended



SINCE 1842

BUILDING A STRONG CASE.

Since 1842, at CASE Construction Equipment we have lived by an unwavering commitment to build practical, intuitive solutions that deliver both efficiency and productivity.

We continually strive to make it easier for our customers to implement emerging technologies and new compliance mandates.

Today, our global scale combined with our local expertise enables us to keep customers' real-world challenges at the center of our product development.

The vast CASE dealers' network is always ready to support and protect your investment and exceed your expectations, while also providing you with the ultimate ownership experience.

Our goal is to build both stronger machines—and stronger communities. At the end of the day, we do what's right for our customers and our communities so that they can count on CASE.

CaseCE.com

NOTE: Standard and optional fittings can vary according to the demands and specific regulations of each country. The illustrations may include optional rather than standard fittings - consult your Case dealer. Furthermore, CNH Industrial reserves the right to modify machine specifications without incurring any obligation relating to such changes.

Conforms to directive 2006/42/EC

