

VIZULO

MICRO MARTIN Smooth Tool-less Eco
MRUSTE 036 740 BC5 BT016 CSN NG1

Customer CAPITAL SRL




CE RoHS

Color  RAL 9006


Electrical	Input power	36 W
	Input voltage	220 - 240 V
	Frequency	50 - 60 Hz
	Power factor	0.98
	Inrush current	19 A / 195 μ s
Optical	Optic name	BC5
	Optic type	TYPE-III
	Luminous flux	5278 lm \pm 10%
	Luminous efficacy	147 lm/W
	Performance temperature Tq	+25 $^{\circ}$ C
	Constant light output	No
	Color rendering index	>70
	Color temperature	4000 K
	Color tolerance	5 SDCM
	ULOR	0
	LED quantity	16
Lifetime	Lumen depreciation	L90 after 100 000 h
	Warranty	5 years
	Ambient temperature range	-40 ... +50 $^{\circ}$ C
Protection	Protection class	Class I
	Surge protection L-N	6 kV
	Surge protection L/N-PE	10 kV
	LED module thermal protection w/ NTC	No
	Max products per MCB B16	32
	Ingress protection	IP66

	Impact resistance	IK08
Housing	Body material	Die-cast aluminium
	Cover material	Flat tempered glass
	Optic material	PMMA
	Color	RAL 9006 (white aluminium)
	Dimensions	517 x 170 x 96 mm
	Max wind load area SCd	0.04 m ²
	Mounting	Post top / side-entry, 60 mm
	LED module replaceability	Replaceable by a professional
	Driver replaceability	Replaceable by a professional
	Accessibility of electronic components	Tool-less
Controls	Dimming	No dimming
Approvals	CE	Yes
	RoHS	Yes

Light distribution

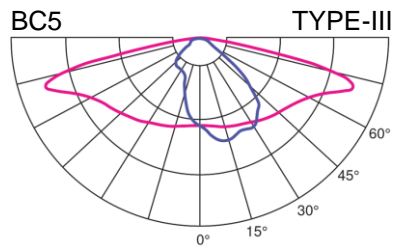

Dimensions

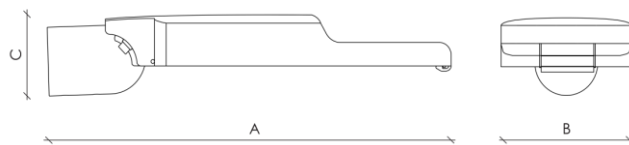

Product images



