

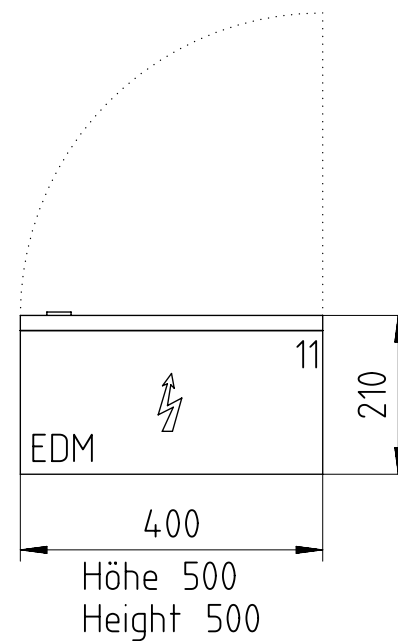
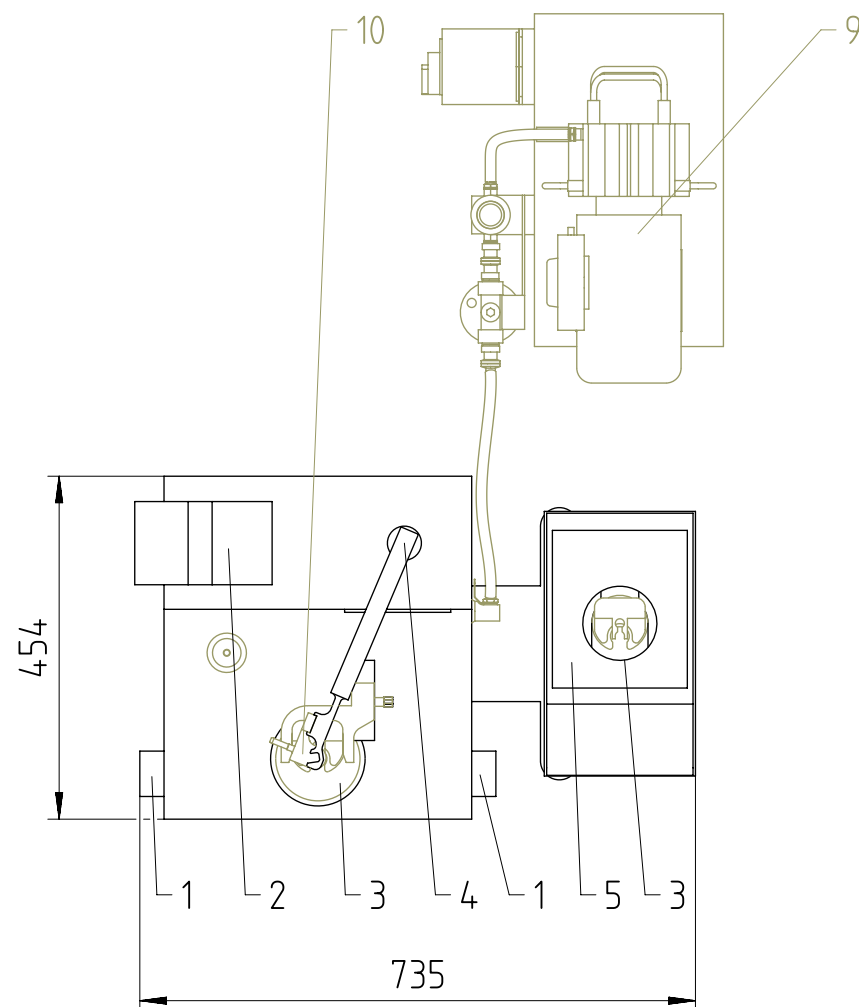
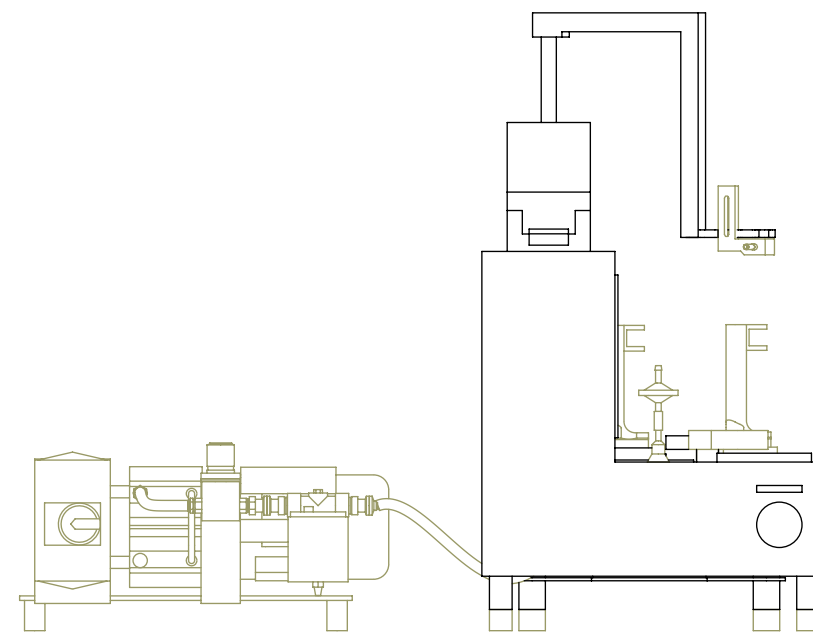


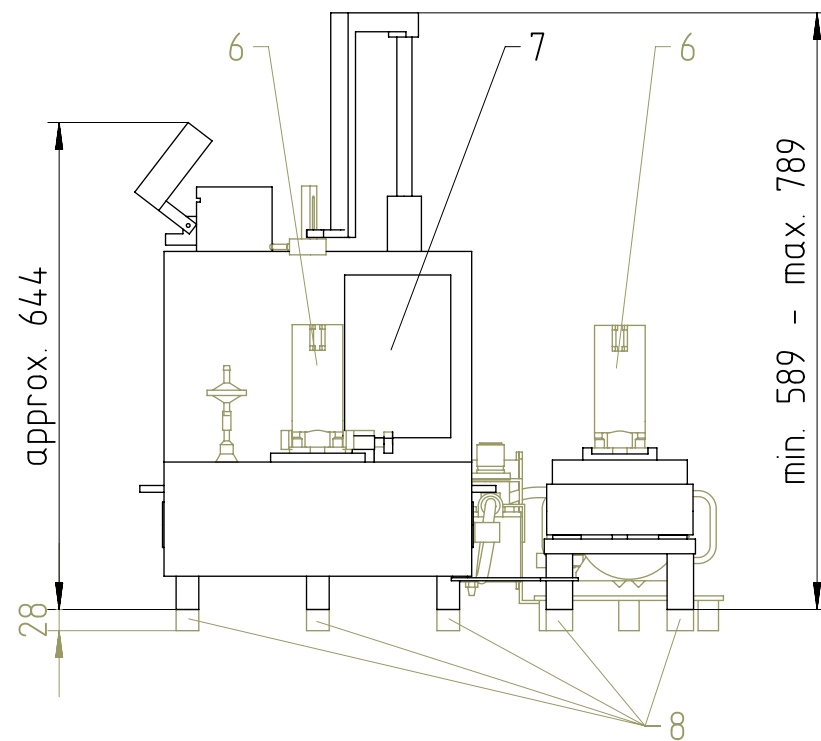

EDM3611

- 1 2-Hand Schaltung
Two-hand control
- 2 Peristaltikpumpe
Peristaltic pump
- 3 Zentrierung
Centering device
- 4 Nadelbewegung
Needle movement
- 5 Waage
Scales
- 6 Erweiterung der Maschine zur Spritzen- und Karpulenverarbeitung (OPTION)
Extension of the machine for processing syringes and cartridges (OPTIONAL)
- 7 Bedienterminal
Operating panel
- 8 Vorbereitung der Maschine zur Integration in einen Isolator (OPTION)
Preparation of the machine for integration into an isolator (OPTIONAL)
- 9 Vakuumpumpe (OPTIONAL)
Vacuum pump (OPTIONAL)
- 10 Vakuumunterstütztes Füllen (OPTIONAL)
Vacuum-assited filling (OPTIONAL)
- 11 Schaltkasten
Switch cabinet

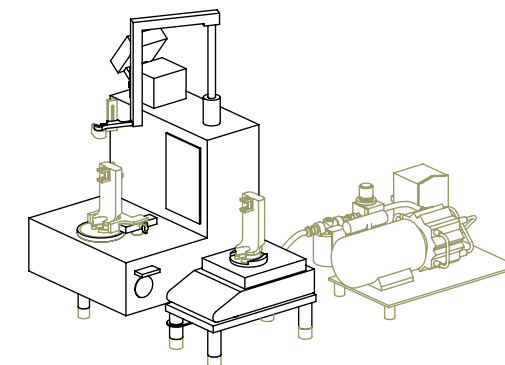

Please note!

All measurements are given in mm!

General tolerances:
ISO2768-1-c
ISO13920-A

Bausch+Ströbel SE+Co. KG
Parkstraße 1 D-74532 Ilshofen
Tel.: (+49)7904 701 0 FAX: (+49)7904 701 222

BAUSCH+STRÖBEL®

Drawing no. :ST-EDM3611-001 - 05

Scale :1:10 Project: EDM3611-001

Project no. :
Copyright
Subject to technical modifications
Date :14.08.2023 Drawn by: Anna-Lisa Sturm

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without express authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.