


SK-205 TECHNICAL SPECIFICATION

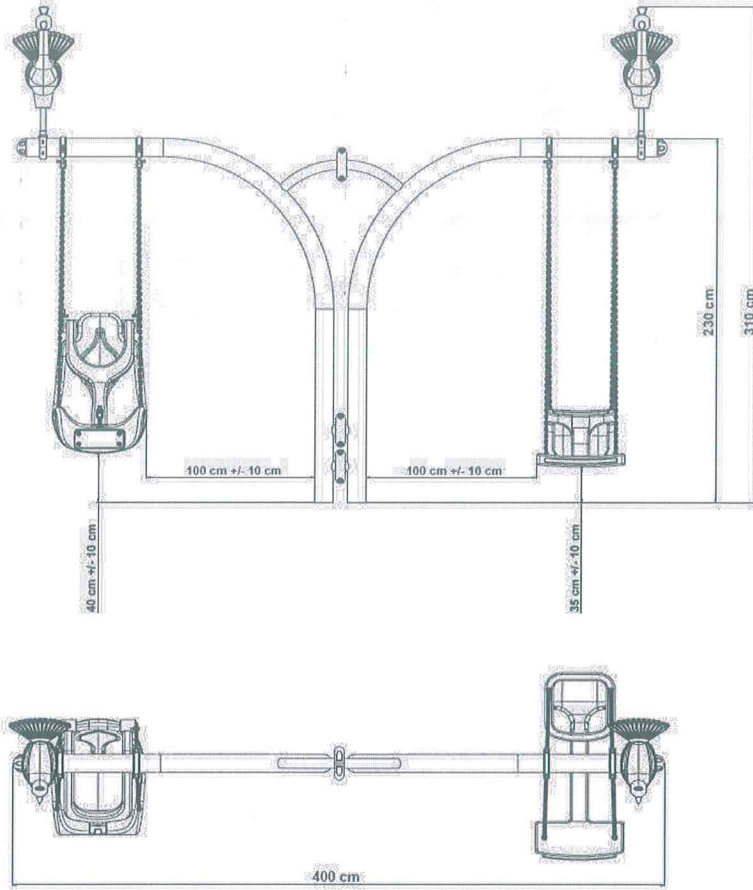



- ❖ The installation should be formed by connecting a total of 4 bearing clamps with chains, 2 for each swing, to a 300 cm-long Ø114 mm minimum 2.5 mm pipe connected by pipes with a minimum wall thickness of Ø 114 mm and 2.5 mm pipes that pass into each other on both sides.
- ❖ Definitely, a swing seat made of hard and metal material will not be used due to impact problems.
- ❖ The distance between the bottom surface of the swing seat and the Decking surface should be at least 40cm (+/-10cm).
- ❖ After the struts and carrier pipes forming the Swing are made of galvanized pipe or subjected to sand blasting, the static oven paint process should be applied.
- ❖ The connecting chains will be used as hot dipped galvanized, with a minimum of 25 microns against rust. In order not to cause finger jamming, 6 mm caliber and double row chain should definitely be used.
- ❖ Polyethylene accessories that conceal the detail can be used optionally in the swing struts combinations.
- ❖ The swing metal assembly will be produced in an inclined form as shown in the picture.
- ❖ Protrusions such as bolts and nuts in the Joint Connection areas will be closed with plastic covers.

MUSTAFA DURNA

İNŞAAT ANONİM ŞİRKETİ

Büyük Kayaık Mh. 3.Org. San. Böl. 19. Sk. No: 4
Tel: 0332 502 10 79 Selçuklu/KONYA
bilgi@mdgroup.com.tr www.isilplastik.com
Selçuk V.D. 624 056 1663 Ticaret Sicil No: 4670
Mersis No: 0624056166300001

MOTHER'S LAP SWING SEAT

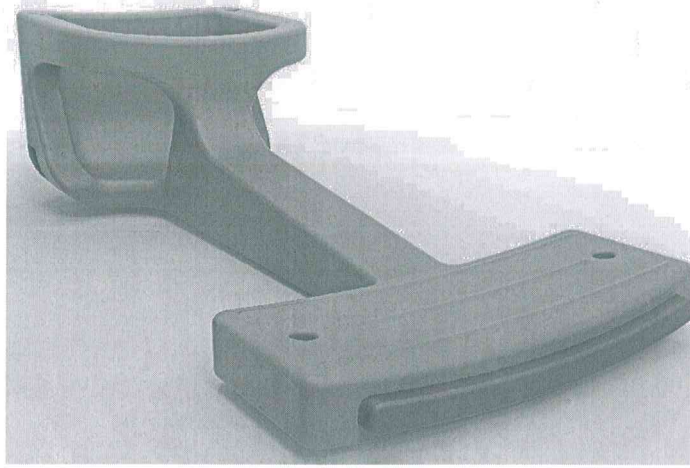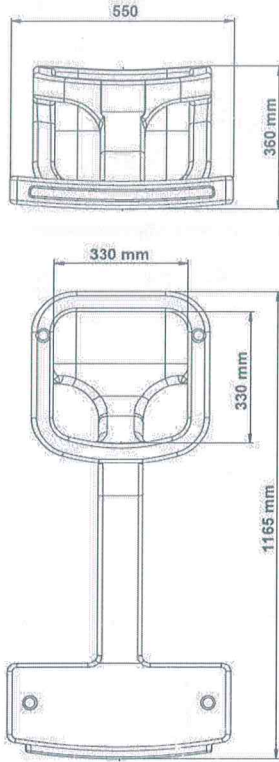


- ❖ Third, the mother's lap swing seat should be closed on the 4 side of the child's seat, and the seat where the mother will sit should be produced in such a way that there are fine lines to prevent slipping.
- ❖ Reclining Seats should be single.
- ❖ A Shock-absorbing rubber bumper should be used on the front surface of the swing seat to prevent collisions.
- ❖ The swing seat width and length should be produced in such a way that the height of 116.5x55 cm is at least 36 cm.
- ❖ The width of the seating area where the child will sit is min. it should be 33 cm.
- ❖ A Mother's lap swing seat should weigh at least 10 kg.
- ❖ According to TS EN 1176-2 / 04.02.2010 It is mandatory to have the expression "POLYETHYLENE" within the scope of the Document.
- ❖ The dyestuffs used in coloring will be in accordance with the children's health and food regulations.

MUSTAFA DURNA İNŞAAT ANONİM ŞİRKETİ

Büyük Kayaık Mh. 3.Org. San. Böl. 19. Sk. No: 4
Tel: 0332 502 10 79 Selçuklu/KONYA
bilgi@mdgroup.com.tr www.isilplastik.com
Selçuk V.D. 624 056 1663 Ticaret Sicil No: 4670
Mersis No: 0624056166300001

UNOBSTRUCTED SWING SEAT

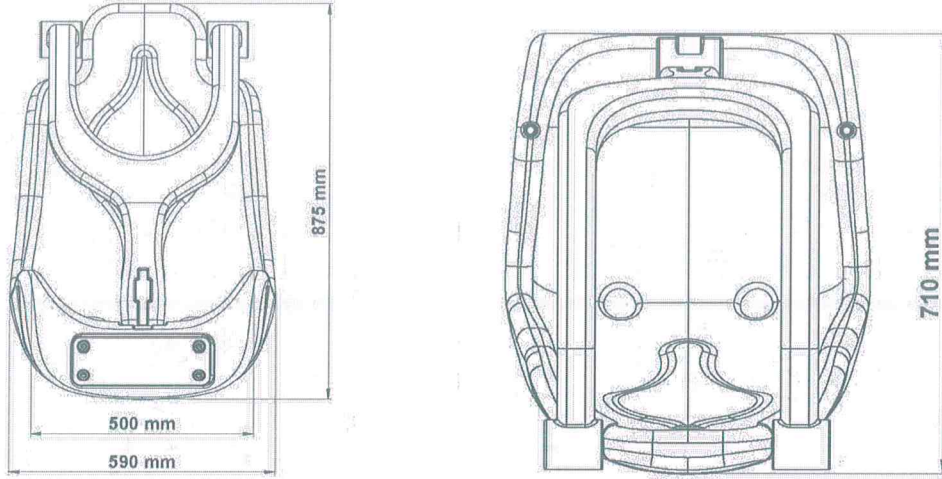

The swing seat should consist of polyethylene material with a front protection belt for 3-side closed safety.

Reclining seats should be single person, there should be a protection belt with a mother and child figure.

The unobstructed swing seat should be manufactured in such a way that its width and length are 59x71 cm and its height is at least 87.5 cm.

The width of the seating area should be at least 50 cm.

The bracket must weigh a minimum of 10 kg along with the swing railing.

A Shock-absorbing rubber bumper should be provided against bumps in the front part of the unobstructed seat.


A Locked safety system should be used between the seat Decking and the protective belt for child safety.

According to TS EN 1176-2 / 04.02.2010 It is mandatory to have the expression "POLYETHYLENE" within the scope of the Document.

The dyestuffs used in coloring will be in accordance with the children's health and food regulations.

MUSTAFA DURNA
İNŞAAT ANONİM ŞİRKETİ

Büyük Kayaçık Mh. 3.Orğ. San. Bölğ. 19. Sk. No: 4
Tel: 0332 502 10 79
bilgi@mdgroup.com.tr
Selçuk V.D. 624 056 1663 Ticaret Sicil No: 4670
Mersis No: 0624056166300001

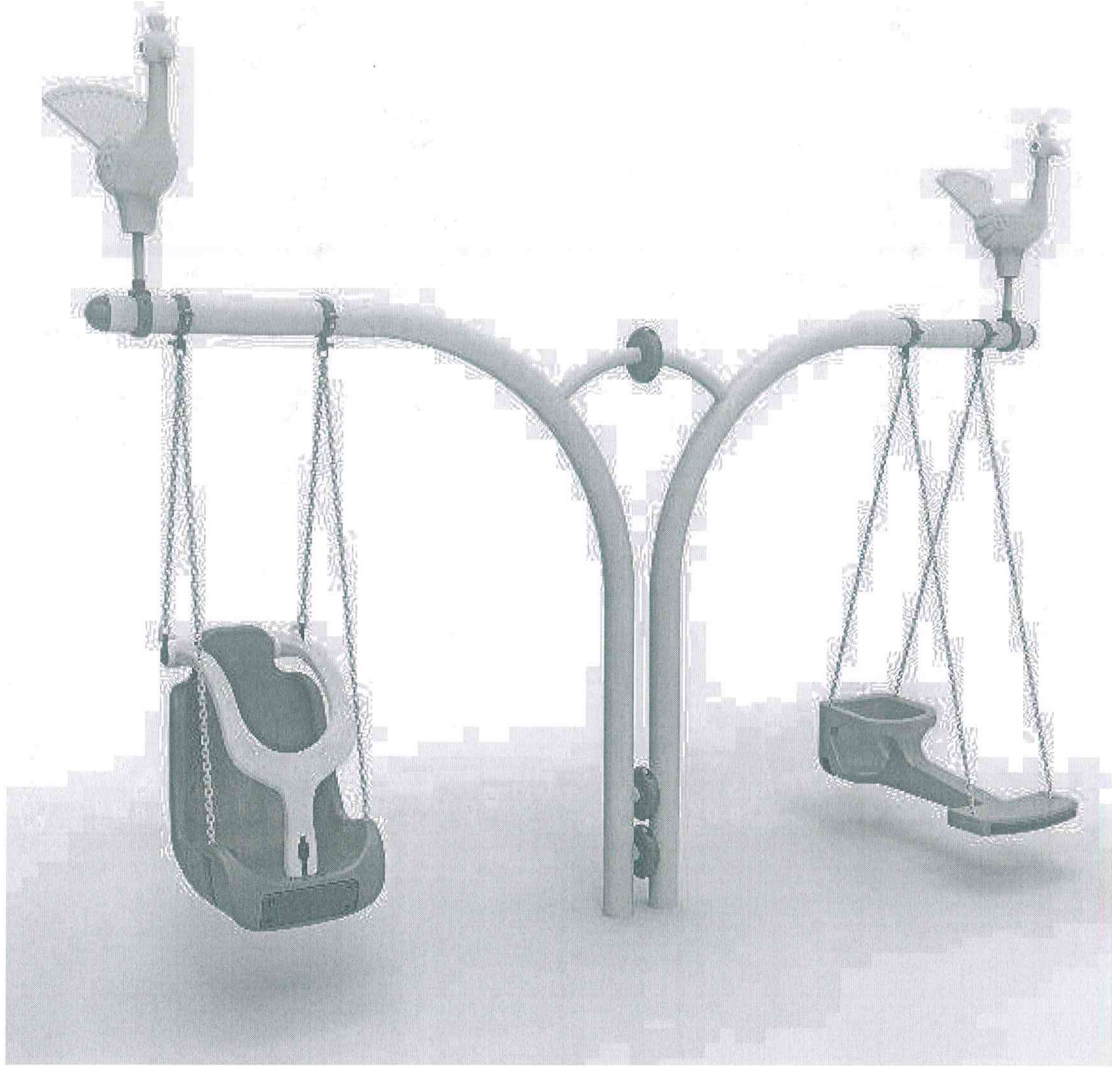

MUSTAFA DURNA
İNŞAAT ANONİM ŞİRKETİ

Büyük Kayaık Mh. 3. Org. San. Böl. 19. Sk. No: 4
Tel: 0332 502 10 79 Selçuklu/KONYA
bilgi@mdgroup.com.tr • www.isiltiplastik.com
Selçuk V.D. 624 056 1663 Ticaret Sicil No: 46702
Mersis No: 0624056166300001