


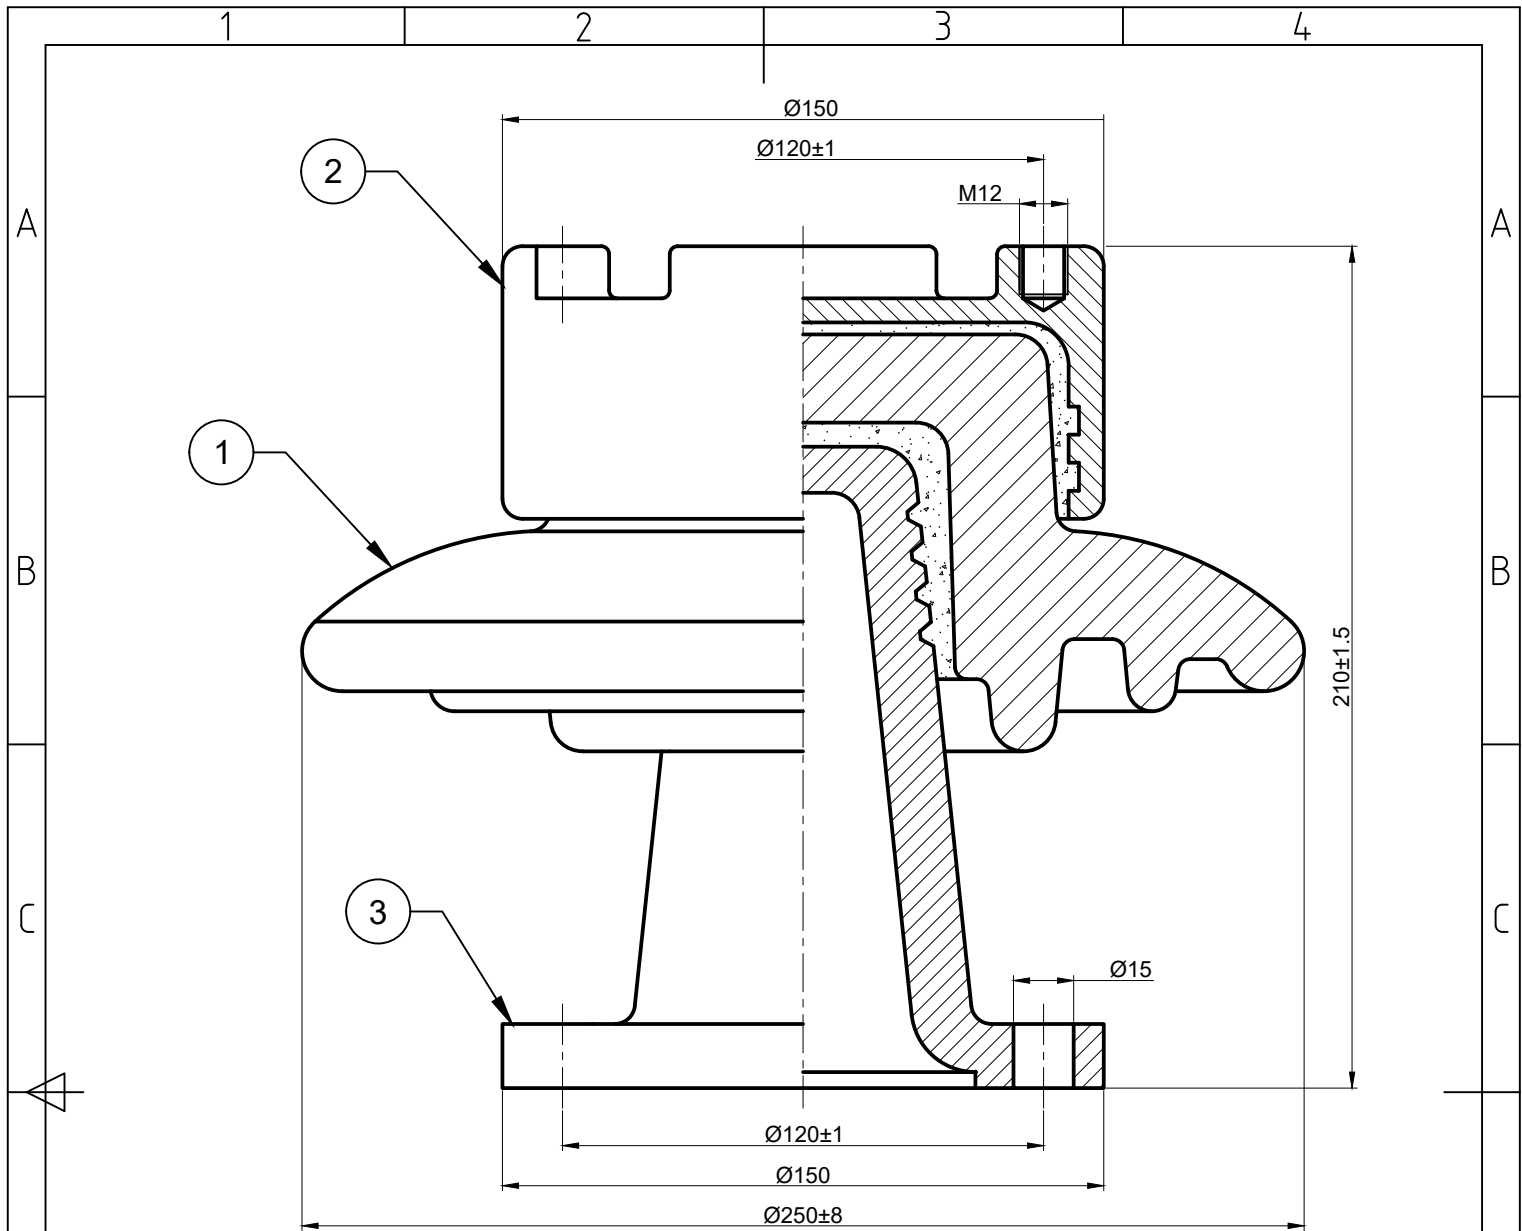

ELEKTRİKSEL PERFORMANS

ELECTRICAL PERFORMANCE

Anma Gerilimi (Rated Voltage)	10 kV
Yıldırım Darbe Dayanma Gerilimi (Lightning Impulse Withstand Voltage)	80 kV

MEKANİKSEL PERFORMANS

MECHANICAL PERFORMANCE

Min. Bükme Kuvveti (Min. Bending Load)	20 kN
---	-------

DİELEKTRİK PARÇALAR

(DIELECTRIC PARTS)

Malzeme (Material)	Porselen (Porcelain)
Sır Rengi (Glaze Color)	Kahverengi (Brown)
Tolerans (General Tolerance)	DIN 40680
Ağırlık (Weight)	~11 kg

3	310000-924	Alt Metal (Bottom Metal)	1	GGG-40 (EN-GJS-400-15) EN ISO 1461 HOT DIP. GALV. (90-100mic.)
2	310000-923	Üst Metal (Top Metal Cap)	1	GGG-40 (EN-GJS-400-15) EN ISO 1461 HOT DIP. GALV. (90-100mic.)
1	312018-000	Seramik Gövde (Ceramic Body)	1	Porselen (Porcelain)
Poz. (Pos.)	Ürün No (Product No)	Bileşen Parçaları (Components Parts)	Adet (Pcs.)	Malzeme (Material)

ALL DIMENSIONS ARE IN mm UNLESS OTHERWISE STATED

THIS DRAWING IS NOT TO BE COPIED OR THE INFORMATION HEREIN DIVULGED TO ANY THIRD PARTY OR USED FOR THE MAKING OF APPARATUS WITHOUT THE WRITTEN PERMISSION OF ANKARA SERAMİK A.Ş.



PORSELEN SAN. ve TİC. A.Ş.
PORCELAIN INDUSTRY OF TURKEY
1.ORGANİZE SAN.BÖL.OSMANLI CAD.
NO:15 SİNCAN/ANKARA/TURKEY
TEL: (0312) 267 37 77 FAX: (0312) 267 27 77
info@ankaseramik.com

Yayın Tarihi
(Release Date)
Onay
(Approved By)
Kontrol
(Checked)
Çizen
(Drawn By)

19.08.2024

İ.ŞAHİN

Ü.ÇAMSARI

N.U.SADİOĞLU

Malzeme
(Material)

Std. No.

Rev. No

Porselen (Porcelain)

-

Ürün no / Müşteri
(Product No / Customer)

312018-000

Adet
(Piece)

Ölçek
(Scale)

**ONSH 10-20 UHL1
PİN TİPİ İZOLATÖRÜ**