


## TECHNICAL DATA SHEET

Protection class (EN 60601-2-41)	I
Power Supply	100 - 240 VAC $\pm$ 10%
Power consumption	69 W
Frequency	50/60 Hz
Light source	LED
Average life	60,000 HOURS ABOUT
Lighting at the centre, Ec @ 100 cm	130,000 LUX 160,000 LUX (OPTIONAL)
Light adjustment	FROM 5 % TO 100%
Colour temperature, CCT (STANDARD)	4,500 K
Variable colour temperature (TW VERSION)	FROM 3,700 K TO 4,700 K continuous

Colour rendering index, Ra	95
Index R9	> 90
Light field diameter	24 - 33 cm
Focusable working distance	70 - 150 cm
Lighting depth L1+L2 (20%)	117 cm
Lighting depth L1+L2 (60%)	71 cm
Light head weight	4 Kg
Light head diameter	50 cm
Handle	REMOVABLE AND STERILIZABLE
Colour	WHITE RAL 9002


## STARLED3 NX IS AVAILABLE IN THE FOLLOWING CONFIGURATIONS

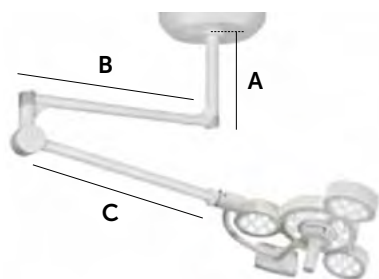

A = FROM 250 mm TO 1,100 mm  
B = 800 mm C = 720 mm

**CEILING MOUNTED**  
(single, double - twin dome - or in  
combination with STARLED5 NX)


Weight of support 6.0 - 9.0 Kg

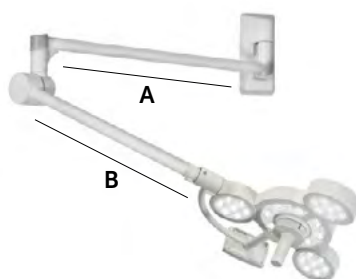

A = 800 mm  
B = 720 mm

**WALL MOUNTED**

Weight of support 5.3 Kg

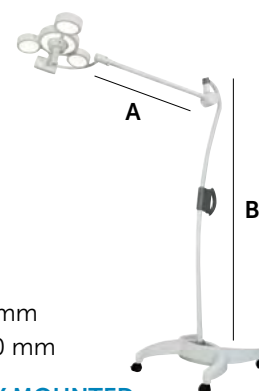

A = 550 mm  
B = 1.750 mm

**TROLLEY MOUNTED**  
(Battery on demand)

Weight of support 23 Kg

ACEM IS A REGISTERED TRADEMARK OF ACEM S.P.A. ACEM ALL RIGHTS RESERVED  
ACEM RESERVES THE RIGHT TO MODIFY THE DESIGN AND SPECIFICATIONS  
CONTAINED HEREIN WITHOUT ANY PRIOR NOTICE.

DEP.STARLED3NX.OPT.TW.EN R2101



**ACEM SPA** | VIA DELLA TECNICA 29, 40050 - ARGELATO, BOLOGNA - ITALY  
PH +39 051 721844 | FAX +39 051 721855 | info@acem.it | **WWW.ACEM.IT**



Management  
System  
ISO 9001:2015  
EN ISO 13485:2016  
www.tuv.com  
ID 9105086197

