

LED Flux measurement

FORM-L-41 ED1 REV 2

Date : **16-01-19**

Operator : **FCE**

Filename : **2019_52.xml**



226 - TEST

LEDs

NBN EN ISO/IEC 17025 : 2005

Trademark : **Samsung**

Entry number : **39R004-2**

Type : **LH351C**

Power (Catalogue) : **0,00** W

BIN Description : **40-70M-4-TB-RB**

Flux : **0** lm/LED

Part number : **Unknown**

Color or CCT (Theoretical) : **NW**

Number of LEDs : **6**

Lenses

Trademark : **None**

Type : **None**


Power & Print

Type : **DELTA SM400-AR-4**

Print description : **00-71-626 A - Voltana 0**


Active ☐

Picture



Sphere photometric measurement

Maximum flux : **1157** lumens

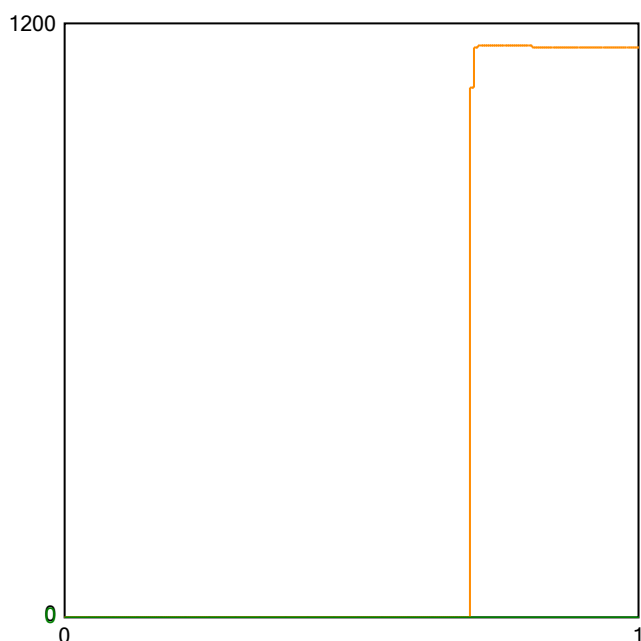

Operating condition

Position in sphere :



Ambient sphere T ° : **24,6**

Electrical measurement

● Secondary electrical measurement

Voltage : **16,93** V

Current : **0,350** A

Power : **5,92** Watt

→ LEDs light efficiency at 25° :

195,4 lm/W

192,9 lm/Led

● Primary electrical measurement

Voltage : **N/A** V

Current : **N/A** A

Power : **N/A** Watt

Cos φ : **N/A**

→ Driver losses : **N/A** %

→ LEDS & Driver light efficiency :

N/A lm/W

Description :

Flux @25°/350mA - pcb Voltana 0 - 6 Samsung LH351C - pcb N°2

Comment :

FORM-L-41 ED1 REV 2



226 - TEST

Approved by :


LED 2019/52 2/3



226 - TEST

NBN EN ISO/IEC 17025 : 2005

Colorimetry

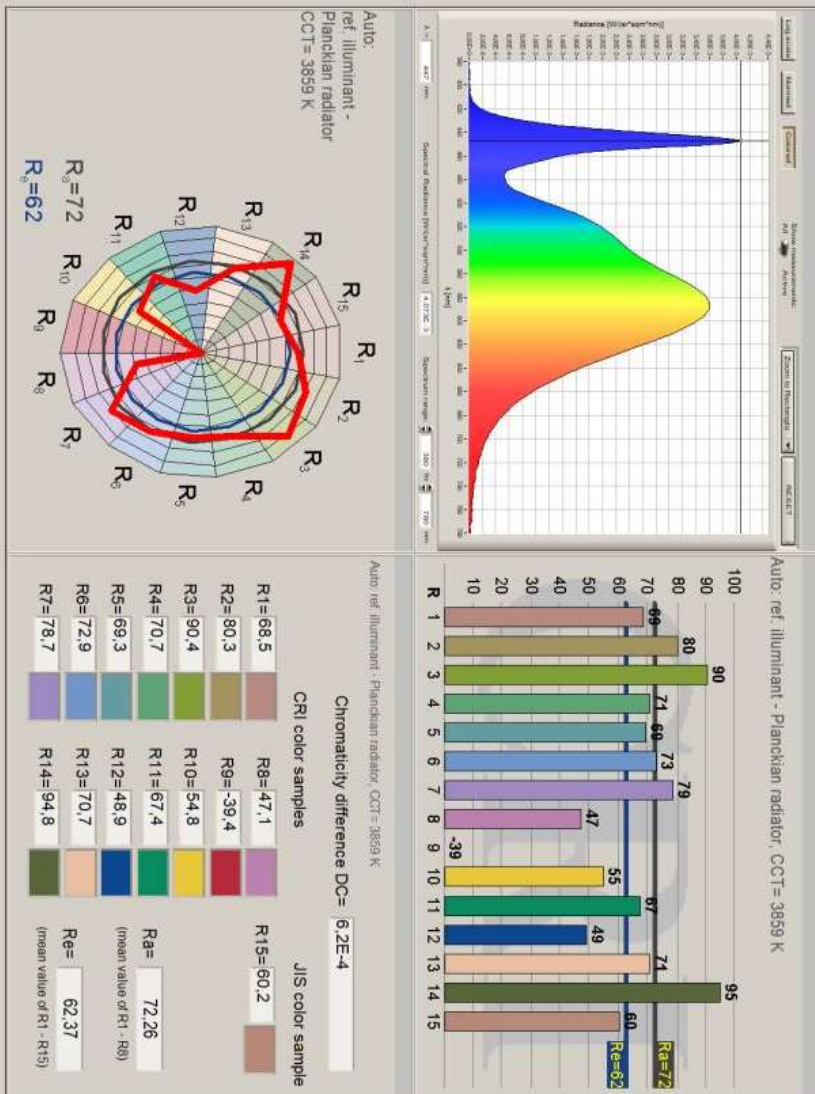

Target

Calibration File: #1 no accessory
Measurement Mode: Radiance
 Average: 1
☐ Cont. ☐ Hold Integration Time
☒ Quick mode

Measurement

#1

Transfer data to table ☒ auto

Luminance	L_v	1.89E+2 $\frac{cd}{m^2}$
Radiance (360-780nm)	L_e	5.383E-1 $\frac{W}{sr \cdot m^2}$
Corr. Color Temp	CCT	3859 K
Chromaticity x	x	0.3864
	y	0.3793
Chromaticity u'	u'	0.2280
	v'	0.5036

QUIT