

# DHI-NVR4816/4832-4KS2

16/32 Channel 2U 8HDDs 4K & H.265 Lite Network Video Recorder



- 16/32-channel IP video access
- Smart H.265+/Smart H.264+/H.265/H.264; H.265 auto switch
- Max 200 Mbps incoming bandwidth
- Up to 8MP resolution for preview and playback
- · 8-channel decoding@1080p (30 fps)
- Al by Camera: Perimeter protection; SMD Plus; people counting; heat map











Dahua's new NVR4000-4KS2 network video recorder delivers excellent performance and high recording quality that is ideally suitable for IP video surveillance applications. This professional NVR adopts powerful processor, providing the capability of 4K resolution processing for applications where image details are highly required. Additionally, the NVR can be served as edge storage, central storage or backup storage with an intuitive shortcut operation menu for remote management and control.

## **Series Overview**

The NVR is compatible with numerous third-party devices, which make it the perfect solution for surveillance systems that work independently of video management system (VMS). It features an open architecture that supports multi-user access and is compatible with ONVIF 2.4 protocol, enabling interoperability with 4K cameras.

#### **Functions**

## **Perimeter Protection by Camera**

Automatically filters out false alarms caused by animals, rustling leaves, bright lights, and more. Enables system to act secondary recognition for the targets. Improving alarm accuracy.

#### **SMD Plus by Camera**

With intelligent algorithm, Dahua smart motion detection technology can categorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.

# **People Counting by Camera**

With deep learning algorithm, Dahua People Counting technology can track and process moving human body targets to realize the accurate statistics of enter No., leave No., and In Area No. Working with management platform, it outputs yearly/monthly/weekly/daily reports to meet your requirements.

#### **Smart Codec**

With advanced scene-adaptive rate control algorithm, Dahua smart codec technology realizes the higher encoding efficiency than H.265 and H.264, provides high-quality video, and reduces the cost of storage and transmission.

#### ANR (Automatic Network Replenishment Technology)

Video record in SD card in IP cameras when the network breaks down, and after the network recovered, the video will be transferred to device and then recorded in it.

#### **DMSS**


The DMSS app is available on the iOS App Store and Google Play. It makes surveillance easy and simple, allowing you to remotely access back-end devices, view live video, receive event push notifications, and search for recorded videos from an iPhone, iPad, or Android phone at anytime from virtually anywhere.


Technical Specification		Storage	
System		Disk Group	Yes
Main Processor	Industrial embedded micro-processor	Alarm	
Operating System	Embedded Linux	General Alarm	Motion detection; privacy masking; video loss; PIR alarm; IPC alarm
Operation Interface Perimeter Protection by	Web; local GUI	Anomaly Alarm	Camera offline; storage error; full storage; IP conflict; MAC conflict; login lock; network security anomaly
Performance	16 channels	Intelligent Alarm	Perimeter protection; SMD; people counting; heat
Al Search	Search for pictures by channel, time and event type	Intelligent Alarm	map
SMD Plus by Camera		Alarm Linkage	Record; snapshot; IPC external alarm output; buzzer; log; preset; email
Performance 16/32 channels		External Port	
Al Search	Search by target classification (human, vehicle)	Audio Input	1 channel, RCA connector
Video	scarch by target dissincation (name), verificial	Audio Output	1 channel, RCA connector, which support voice intercom output
Access Channel	16/ <u>32</u>	HDD	8 SATA III ports, up to 10 TB for a single HDD. The maximum HDD capacity varies with environment temperature
Network Bandwidth	200 Mbps for access, 200 Mbps for storage and 96 Mbps for forwarding	Alarm Input	16 channels
Resolution	8MP, 6MP, 5MP, 4MP, 3MP, 1080p, 1.3MP, 720p, D1, and more	Alarm Output	4 channels
Decoding Capability	8 channels@1080p (30 fps)	RS-232	1 channel, used to debug and pass through serial data
Video Output	HDMI: 3840 × 2160; 1920 × 1080; 1280 × 1024; 1280 × 720 VGA: 1920 × 1080; 1280 × 1024; 1280 × 720	RS-485	1 channel, used to control PTZ, and it supports multiple protocols
Multi-screen Display	16-channel: 1/4/8/9/16 32-channel: 1/4/8/9/16/25/36	USB	2 front USB 2.0 ports, 1 rear USB 3.0 port
Third Party Camera Access	Panasonic, Sony, Samsung, Axis, Pelco, Arecont,	HDMI	1
·	ONVIF, Canon and more	VGA	1
Compression		Network	2 RJ-45 10/100/1000 Mbps self-adaptive Ethernet ports
Video	Smart H.265+; Smart H.264+; H.265; H.264	General Parameter	
Audio	PCM; G.711A; G.711U; G.726	Power Supply	Single, 100V–240V AC, 50 Hz–60 Hz
Network	UTTO UTTO TOO/10 10 4/10 0 140 0 000 0 000	Power Consumption	< 12W (without HDD)
Network Protocol	HTTP; HTTPS; TCP/IP; IPv4/IPv6; UPnP; SNMP; RTSP; UDP; SMTP; NTP; DHCP; DNS; IP Filter; DDNS; FTP; Alarm Server; IP Search (supports Dahua IP camera, DVR, NVS, and more); P2P	Net Weight	5.2 kg (11.5 lb) (without HDD)
		Gross Weight	9.5 kg (20.9 lb) (without HDD)
Mobile Phone Access	Android; iOS	Product Dimensions	440.0 mm × 452.5 mm × 94.9 mm (17.3" × 17.8" × 3.7")
Interoperability	ONVIF (profile T/S/G); CGI; SDK	Package Dimensions	563 mm × 563 mm × 215 mm (22.2" × 22.2" × 8.5")
Browser	Chrome; IE9 or later; Firefox	Operating Temperature	-10°C to +55°C (+14°F to +131°F)
Record Playback		Storage Temperature	0°C to +40°C (+32°F to +104°F)
Multi-channel Playback	1/4/9/16	Operating Humidity	10%-93% (RH)
Record Mode	Manual; schedule (general; MD; alarm; MD & alarm; intelligent)	Storage Humidity	30%-85% (RH)
Storage Method	Local HDD and network	Operating Altitude	3,000 m (9,843 ft)
Backup	USB device  1. Play; pause; stop; fast forward; fast backward;	Certifications	CE: EN55032; EN55024; EN50130-4; EN60950-1 FCC: Part 15 Subpart B; ANSI C63.4-2014
Playback Function	rewind; play by frame  2. Full screen; backup (cut/file); partially enlarge; audio on/off		UL: UL 60950-1

# Pro Series | DHI-NVR4816/4832-4KS2


Ordering Information			
Туре	Model	Description	
16 Channel NVR	DHI-NVR4816-4KS2	16 Channel 2U 4K & H.265 Lite Network Video Recorder	
32 Channel NVR	DHI-NVR4832-4KS2	32 Channel 2U 4K & H.265 Lite Network Video Recorder	

# Dimensions (mm[inch])





## **Panels**

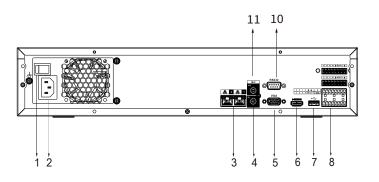

- 1 Power Switch
- 3 Network Ports
- 5 VGA Port
- 7 USB Port
- 9 RS-232 Port
- 2 Power Input
- 4 AUDIO IN, RCA Connector
- 6 HDMI Port
- 8 Alarm In/Out
- 10 AUDIO OUT, RCA Connector