


A

B

REV	ZONE	DESCRIPTION	DATE	DAWN

Power cable 3G*1.5mm²*3m
with 16A GER plug

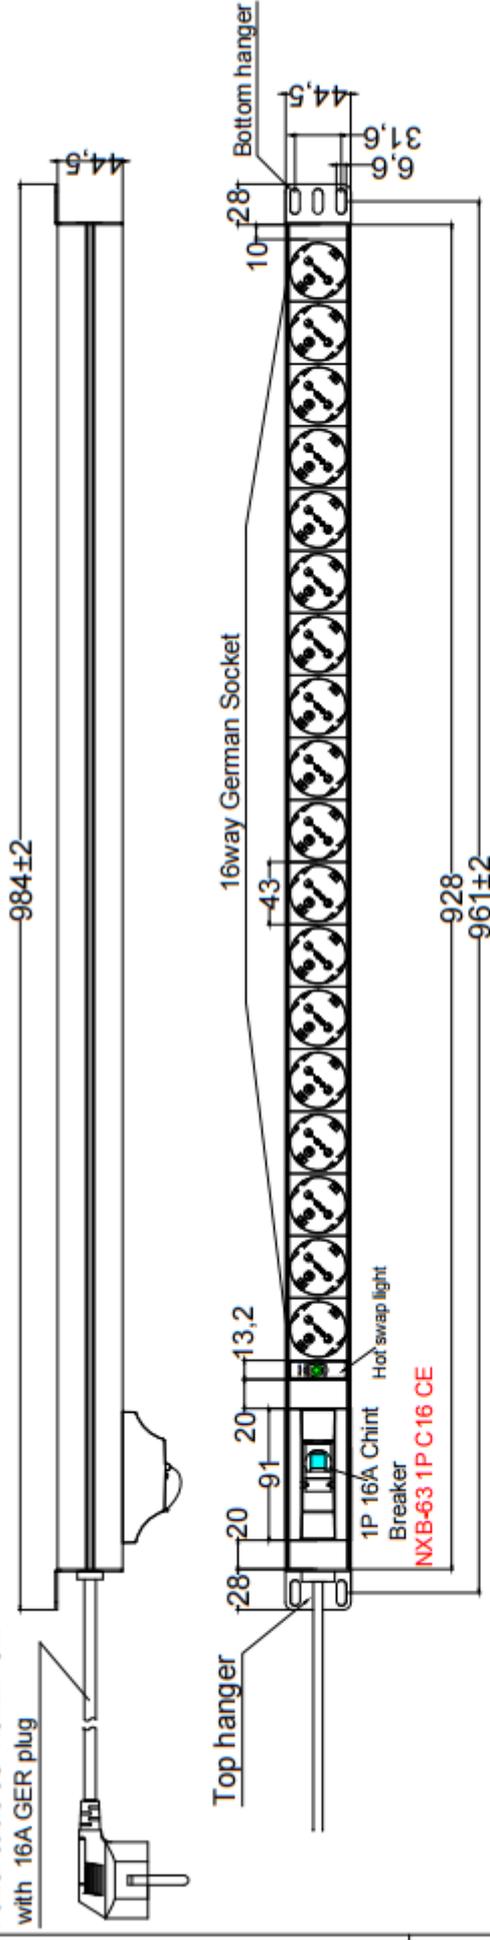

Specification requirements:

- 1.Shell material: 1U(44.5x44.5)aluminum
- 2.Input voltage: 220V-250V 50/60 Hz,
- 3.Output voltage: 220-250Vac
- 4.Maximum current: 16A
- 5.Input wire specifications:3G*1.5mm²*3M
- 6.Input plug: with 16A GER plug
- 7.Output socket: 16-outlet German Socket Max: 250V 16A
- 8.Internal cable: main line 1.5mm²
- 9.Installation mode: Upper angle, vertical installation
Pictured third angle, scale: 1:1, Unit: mm

2

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MM. GENERAL TOLERANCE: 0-50 ±0.15 50-200 ±1 200- ±2	THIS DRAWING SHOWS ALL PRODUCT DIMENSIONS DO NOT SCALE DRAWING FINISH	TITLE: PDU-16GER-MCB-HLT-16A-3M
DRAWN L	DATE 2026-03-20	SIZE MODEL NO. A4
CHECKED	DATE	QUANTITY/UNIT: MM
APPROVED	DATE	MATERIAL:
		DWG NO.
		SCALE
		SHEET 1 OF 1
		REV 0

A

R