

VB400 14-PORT DOCK

Host multiple VB400 cameras
for simultaneous rapid charging,
configuration and video downloading.



GENERAL INFORMATION


Product Code	VB-400-DOCK-14/UK, VB-400-DOCK-14/EU, VB-400-DOCK-14/US, VB-400-DOCK-14/AUS, VB-400-DOCK-14/ROW
Hosts Multiple VB400s	14 VB400 camera ports
Scalability	Multiple docking stations can be connected to a DockController
Compatibility	Compatible with DockController DC-200
Easy To Deploy	Connection is a single USB to the DockController, and a mains adaptor for power - USB cable supplied Eliminates need for separate wiring to each camera
Speedy Plug-in / Pull-out Connectivity	VB400 cameras can be easily docked or undocked for speedy use
Flexible Docking	Flexible for use with camera accessories attached. Can be securely fastened to a shelf or other mounting surface - can be secured at an angle
Warranty	1 year return-to-manufacturer warranty including email and telephone support Extended warranty available

SIZE AND WEIGHT

Dimensions	200mm x 38mm x 436mm
Weight	2.2kg (3.5kg boxed)

CHARGING, POWER & INTERFACE

Charging	Up to 8hrs from a fully flat battery
Power Requirement	12V/5A PSU, input 100-240V (PSU supplied).
Interface	USB 2.0 compatible USB 3.0 compatible

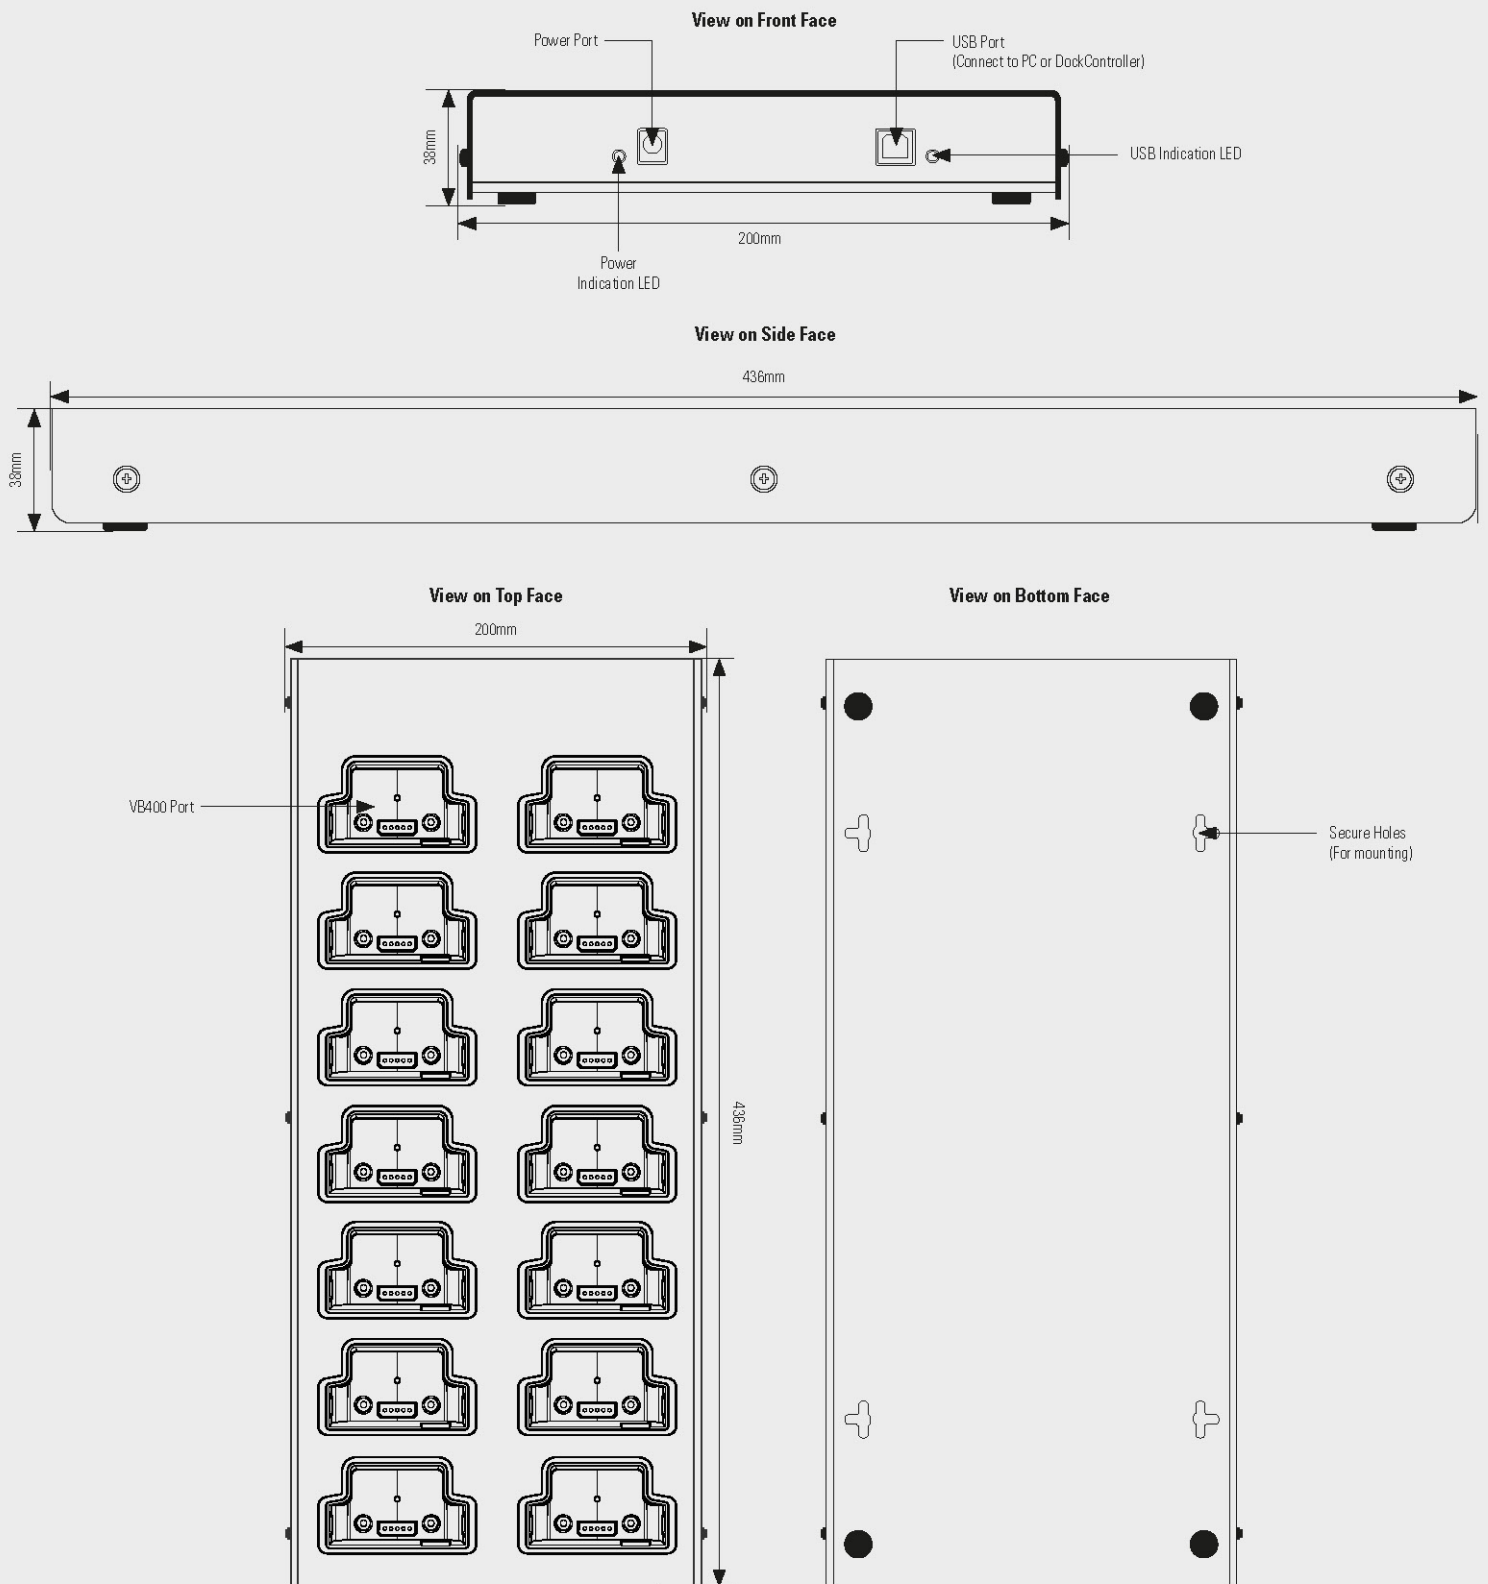

For more information, please visit: www.motorolasolutions.com

Motorola Solutions Ltd. Nova South, 160 Victoria Street, London, SW1E 5LB, United Kingdom

MOTOROLA, MOTO, MOTOROLA SOLUTIONS and the Stylized M Logo are trademarks or registered trademarks of Motorola Trademark Holdings, LLC and are used under license. All other trademarks are the property of their respective owners. © 2021 Motorola Solutions, Inc. All rights reserved.



ICS "Reliable Solutions Distributor" SRL

Alexandru cel Bun Street 85, Chisinau, Republic of
Moldova MD-2012
www.rsd.md
sales@rsd.md