


Dual Channel Digital Storage Oscilloscope **multicomp** PRO

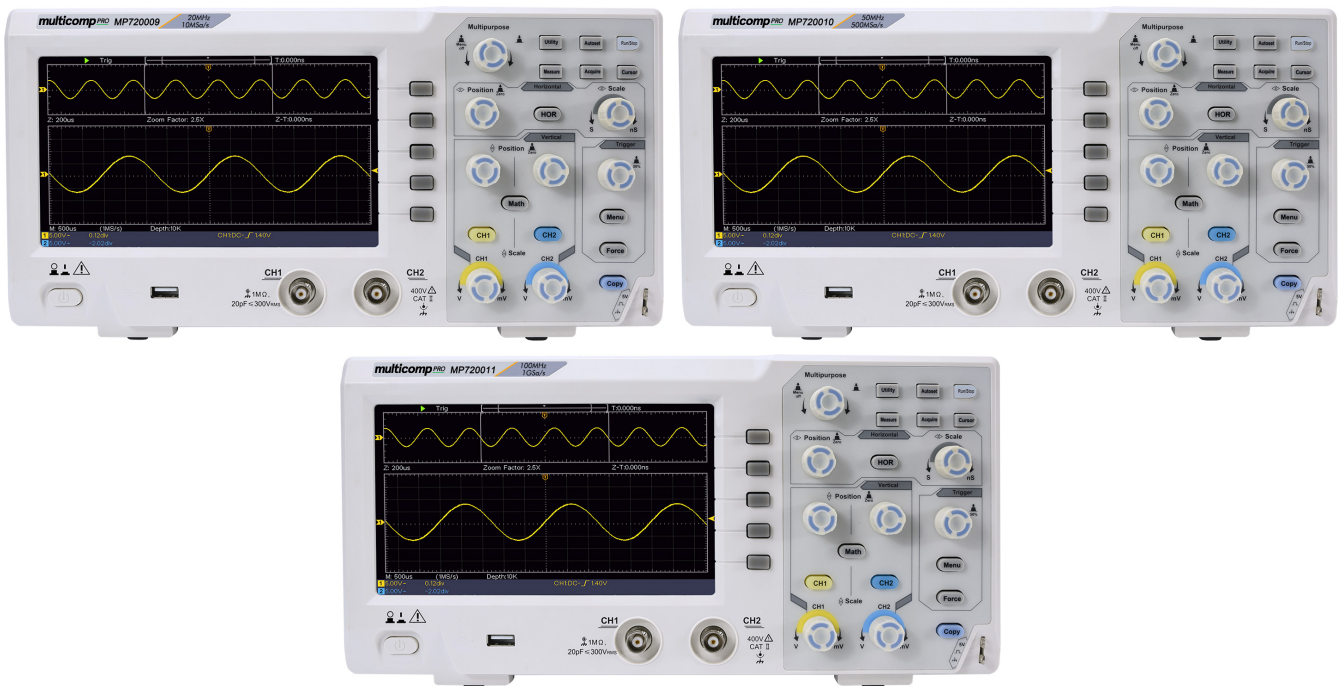

Features

- Bandwidth : 20MHz - 100MHz
- 2-Channels
- Sample rate : 100MS/s - 1GS/s
- Ultra-thin body
- 7 inch high resolution LCD
- SCPI, and LabVIEW supported

Performance Specifications

Parameters	MP72009 EU-UK	MP72010 EU-UK	MP72011 EU-UK
Bandwidth	20MHz	50MHz	100MHz
Sample Rate	100MS/s	500MS/s	1GS/s
Horizontal Scale (s/div)	5ns/div - 1000s/div, step by 1 - 2 - 5	2ns/div - 1000s/div, step by 1 - 2 - 5	
Rise Time (at input, typical)	≤17.5ns	≤7ns	≤3.5ns
Channels	2		
Display	7" colour LCD, 800 × 480 pixels		
Input Impedance	1MΩ ±2%, in parallel with 20pF ±5pF		
Channel Isolation	50Hz : 100 : 1, 10MHz : 40 : 1		
Max Input Voltage	400V (PK - PK) (DC+AC, PK - PK)		
DC Gain Accuracy	±3%		
Record Length	10K		
DC Accuracy (average)	Average≥16: ±(3% reading + 0.05 div) for ΔV		
Probe Attenuation Factor	1X, 10X, 100X, 1000X		

Newark.com/exclusive-brands
 Farnell.com/exclusive-brands
 Element14.com/exclusive-brands

multicomp PRO

Dual Channel Digital Storage Oscilloscope **multicomp** PRO

Parameters		MP720009 EU-UK	MP720010 EU-UK	MP720011 EU-UK
LF Respond (AC, -3dB)		≥10Hz (at input, AC coupling, -3dB)		
Sample Rate / Relay Time Accuracy		±100ppm		
Interpolation		sin (x) / x		
Interval (ΔT) Accuracy (full bandwidth)		Single: ±(1 interval time + 100ppm × reading + 0.6ns), Average>16 : ±(1 interval time + 100ppm × reading + 0.4ns)		
Input Coupling		DC, AC and GND		
Vertical Resolution (A/D)		8 bits (2 channels simultaneously)		
Vertical Sensitivity		5mV/div - 5V/div (at input)		
Trigger Type		Edge, Video		
Trigger Mode		Auto, Normal, and Single		
Trigger Level		±5 divisions from screen center		
Line / Field Frequency (video)		NTSC, PAL and SECAM standard		
Cursor Measurement		ΔV, and ΔT between cursors		
Automatic Measurement		Vpp, Vavg, RMS, Frequency, Period, Vmax, Vmin, Vtop, Vbase, Width, Overshoot, Pre-shoot, Rise time, Fall time, +Width, -Width, +Duty, -Duty, Delay A→B, Delay A→B, area, cycle area		
Waveform Math		+, -, x, ÷, invert, FFT		
Waveform Storage		16 waveforms		
Lissajous Figure	Bandwidth	Full bandwidth		
	Phase Difference	±3 degrees		
Communication Interface		USB host, USB device		
Frequency Counter		Available		
Power Consumption		<15W		
Fuse		2A, T class, 250V		
Dimension (W × H × D)		301mm × 152mm × 70mm		
Device Weight		1.1kg		
Power Supply		100V AC to 240V AC, 50/60Hz, CAT II		
Power Cord Plug Type		UK / EU		
Standard Accessories Included		Power cord, USB cable, CD-Rom.Manual, Probes, Probe Adjust Tool		
Optional Accessories		Soft bag		
Warranty		12 months		

Part Number Table

Description	Part Number
Dual Channel Digital Storage Oscilloscope, 20MHz	MP720009 EU-UK
Dual Channel Digital Storage Oscilloscope, 50MHz	MP720010 EU-UK
Dual Channel Digital Storage Oscilloscope, 100MHz	MP720011 EU-UK

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/exclusive-brands
 Farnell.com/exclusive-brands
 Element14.com/exclusive-brands

multicomp PRO