

13.5 Exploded drawing / list of parts, type 00800 and 01200

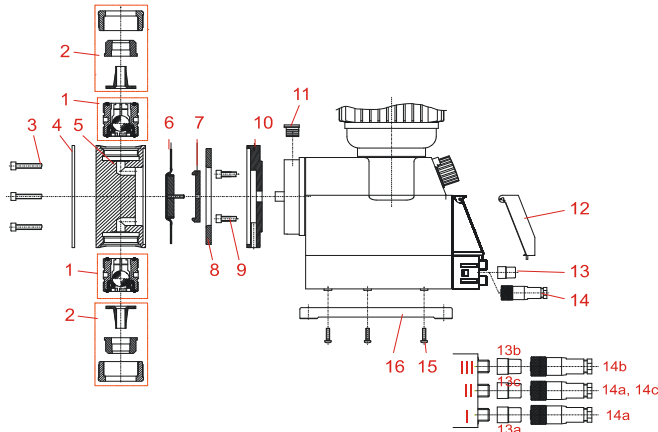


Fig. 13.2 Exploded drawing / list of parts, type 00800 and 01200

Pos.	Description	type 00800 type 01200
1	Suction-/Pressure valve PP/FPM (Viton B) SDV PFPKE000 G1¼ - G1¼ - 99	W3T168547
	Suction-/Pressure valve PP/EPDM SDV PPEPKE000 G1¼ - G1¼ - 99	W3T164436
	Suction-/Pressure valve PVDF/FPM (Viton B) SDV PVFPKE000 G1¼ - G1¼ - 99	W3T164848
	Suction-/Pressure valve PVDF/EPDM SDV PVEPKE000 G1¼ - G1¼ - 99	W3T164850

Pos.	Description	type 00800	type 01200
2	Connection set, PP, G 1 ¼ i - hose 12/21 mm	W3T168531	
	Connection set, PVDF, G1¼ i - hose 12/21 mm	W3T160480	
3	Pump head screw	W3T168082	W3T168083
4	Proofing plate	W3T168084	W3T168085
5	Pump head PP	W3T160473	W3T160474
	Pump head PVDV	W3T168086	W3T168087
6	Diaphragm*	W3T168088	W3T168089
7	Support Disk	W3T168090	W3T168091
8	Intermediate disk	W3T168094	W3T168095
9	Screw	W3T168096	
10	Intermediate plate	W3T168092	W3T168093
11	Covering stopper	on request	
12	Transparent cover	W3T167966	
13a	Jumper plug empty signal input	W3T167967	
13b	Cover cap	W3T167968	
14a	Plug 4 pin (3 pin) empty signal-/pulse signal input	W3T167969	
14b	Plug 4 pin, special version, empty signal-/pulse signal output	W3T167970	
14c	Plug 5 pin, current signal-/pulse signal input	W3T167971	
15	Screw, B40 x 16	on request	
16	Mounting plate	W3T168059	

13.6 Wearing part set – type 00800 und 01200

<u>Consisting of (each 1 piece):</u>	Description - Wearing part set	Article no.
<ul style="list-style-type: none"> Suction valve (Pos. 1) Pressure valve (Pos. 1) Connection set for hose 12/21 mm (Pos. 2) Diaphragm (Pos. 6) Support Disk (Pos. 7) 	00800 PFPKE	W3T164344
	01200 PFPKE	W3T164345
	00800 PPEPKE	W3T164349
	01200 PPEPKE	W3T164350
	00800 PVFPKE	on request
	01200 PVFPKE	on request
	00800 PVEPKE	on request
	01200 PVEPKE	on request

1. Pump type (pump capacity)

00800 = 80 l/h
01200 = 120 l/h

2. Valve material

PP = PP
PV = PVDF

3. Sealing material

FP = Viton B
EP = EPDM

4. Valve ball material

KE = ceramics

Wearing part set	00800	PP	FP	KE
------------------	-------	----	----	----