

DUCATO

TECHNICAL SPECIFICATIONS



GOODS TRANSPORT

FIAT
PROFESSIONAL

INDEX

PANEL VAN – GLAZED/HALF GLAZED VAN – GLAZED/HALF GLAZED CREW CAB VAN

WHEELBASE 3000

VAN (8,0 m³) / GVW 2,8t – 3,0t – 3,3t – 3,5t	page 10
--	---------

WHEELBASE 3450

VAN (10,0 m³ – 11,5 m³) / GVW 3,0t – 3,3t – 3,5t	page 11
MAXI VAN (11,5 m³) / GVW 3,5t	13
GLAZED/HALF-GLAZED VAN (11,5 m³) / GVW 3,3t – 3,5t	12
MAXI GLAZED/HALF-GLAZED VAN (11,5 m³) / GVW 3,5t	14
CREW CAB (8,0 m³) / GVW 3,3t – 3,5t	21
MAXI CREW CAB (8,0 m³) / GVW 3,5t	21

WHEELBASE 4035

VAN (13,0 m³ – 15,0 m³) / GVW 3,5t – 4,0t	page 15
MAXI VAN (13,0 m³ – 15,0 m³) / GVW 3,5t – 4,0t	17
GLAZED/HALF-GLAZED VAN (13,0 m³) / GVW 3,5t	16
MAXI GLAZED/HALF-GLAZED VAN (13,0 m³) / GVW 3,5t – 4,0t	18
MAXI CREW CAB (10,5 m³) / GVW 3,5t	21

WHEELBASE 4035XL

MAXI VAN (15,0 m³ – 17,0 m³) / GVW 3,5t – 4,0t	page 19
MAXI GLAZED VAN (15,0 m³) / GVW 4,0t	20

GENERAL NOTES AND CO2 INFORMATION

All data (e.g. kerb weight, payload, fuel consumption, CO2 emissions etc.) are referred to standard version without optional equipment.
Payload data include driver's weight.
The CO2 emission and fuel consumption values are defined based on official tests, in conformity with the provisions of the EU Regulations in force at the time of homologation. In particular, the indicated values are calculated based on the WLTP test procedure.
The CO2 and fuel consumption values are hereby indicated as to allow the comparison of vehicle data.
The homologation values of CO2 and fuel consumption may not reflect the actual values of CO2 and fuel consumption, which depend on many factors related, by way of example but not limitation, to the driving style, the route, the weather and road conditions, the condition, use and equipment of the vehicle.
The indicated value of CO2 and fuel consumption refers to the versions of the vehicle with the highest and the lowest values. Those values may change with the subsequent configuration depending on equipment selected and/or size of tires selected.
The indicated values of CO2 and fuel consumption are not definitive and may evolve as a result of changes in the production cycle; more up-to-date values will be available at the selected official dealer of the Fiat Professional network.
In any case, the official values of CO2 and fuel consumption of the vehicle purchased by the customer will be provided with the documents accompanying the vehicle.
In cases where the values of CO2 and fuel consumption are relevant for the purposes of calculating taxes and duties related to the vehicle, reference should be made to the applicable laws in each country.
Vehicles type-approved in category N2 are limited to 90 km/h.

TRUCK DROPSIDE – TRUCK 3 WAY TIPPER – TRUCK 1 WAY TIPPER –
CREW CAB TRUCK DROPSIDE – CREW CAB TRUCK 3 WAY TIPPER –
CREW CAB TRUCK 1 WAY TIPPER

WHEELBASE 3450

TRUCK DROPSIDE / GVW 3,5t	page 22
MAXI TRUCK DROPSIDE / GVW 3,5t	24
CREW CAB TRUCK DROPSIDE / GVW 3,5t	26
MAXI CREW CAB TRUCK DROPSIDE / GVW 3,5t	27
TRUCK 3-WAY TIPPER / GVW 3,5t	29
TRUCK 1-WAY TIPPER /GVW 3,5t	33
MAXI TRUCK 3-WAY TIPPER / GVW 3,5t	30
MAXI TRUCK 1-WAY TIPPER /GVW 3,5t	35
CREW CAB TRUCK 1-WAY TIPPER / GVW 3,5t	36

WHEELBASE 3800

TRUCK DROPSIDE / GVW 3,5t	page 22
MAXI TRUCK DROPSIDE / GVW 3,5t	24
TRUCK 3-WAY TIPPER / GVW 3,5t	29
TRUCK 1-WAY TIPPER /GVW 3,5t	33
MAXI TRUCK 3-WAY TIPPER / GVW 3,5t	30
MAXI TRUCK 1-WAY TIPPER / GVW 3,5t	35

WHEELBASE 4035

TRUCK DROPSIDE / GVW 3,5t	page 23
MAXI TRUCK DROPSIDE / GVW 3,5t	25
CREW CAB TRUCK DROPSIDE / GVW 3,5t	26
MAXI CREW CAB TRUCK DROPSIDE / GVW 3,5t – 4,0t	27
TRUCK 3-WAY TIPPER / GVW 3,5t	29
TRUCK 1-WAY TIPPER /GVW 3,5t	34
MAXI TRUCK 3-WAY TIPPER / GVW 3,5t	30
MAXI TRUCK 1-WAY TIPPER / GVW 3,5t	35
CREW CAB TRUCK 3-WAY TIPPER / GVW 3,5t	31
MAXI CREW CAB TRUCK 3-WAY TIPPER / GVW 3,5t – 4,0t	32
MAXI CREW CAB TRUCK 1-WAY TIPPER / GVW 3,5t – 4,0t	37

WHEELBASE 4035 XL

TRUCK DROPSIDE / GVW 3,5t	page 23
MAXI TRUCK DROPSIDE / GVW 3,5t	25
MAXI CREW CAB TRUCK DROPSIDE / GVW 3,5t	28
MAXI CREW CAB TRUCK 3-WAY TIPPER / GVW 3,5t	32
MAXI CREW CAB TRUCK 1-WAY TIPPER / GVW 3,5t	37

TECHNICAL SPECIFICATIONS

PANEL VAN - GLAZED / HALF-GLAZED VAN - CREW CAB VAN - TRUCK

ENGINE	120 MULTIJET ³	140 MULTIJET ³	180 MULTIJET ³ POWER				
No. of cylinders, layout	4, in line	4, in line	4, in line				
Displacement in cc (bore x stroke in mm)	2184 (83,8 x 99)	2184 (83,8 x 99)	2184 (83,8 x 99)				
Compression ratio	15.7:1	15.7:1	15.7:1				
Max power output (EEC): kW (HP) / rpm	88 (120) / 3500	104 (140) / 3500	132 (180) / 3500				
Max torque output (EEC): Nm / rpm (with AT9)	320 / 1400-2500	350 / 1400-2500 - (380 / 1400-2250)	380 / 1500-3000 - (450 / 1500-1750)				
Emission standard level	Euro 6d-final (Step 2)	Euro 6d-final (Step 2) / Euro VI-E	Euro 6d-final (Step 2) / Euro VI-E				
Timing system (control)	DOHC (toothed belt)	DOHC (toothed belt)	DOHC (toothed belt)				
Supply	electronically controlled Common Rail MultiJet ³ direct injection with variable geometry turbocharger and intercooler	electronically controlled Common Rail MultiJet ³ direct injection with variable geometry turbocharger and intercooler	electronically controlled Common Rail MultiJet ³ direct injection with variable geometry turbocharger and intercooler				
Ignition	by compression	by compression	by compression				
Transmission							
Drive	front	front	front				
Clutch	dry single plate with hydraulic release device	dry single plate with hydraulic release device	torque converter	dry single plate with hydraulic release device			torque converter
Gearbox, no. of gears	manual, 6 + R	manual 6 + R	automatic, 9 + R with manual upshift / downshift functionality 3 drive modes available (normal / eco / power)	manual 6 + R			automatic, 9 + R with manual upshift / downshift functionality 3 drive modes available (normal / eco / power)
Gearbox ratios	manual	1:4.154	1:4.710	Manual	Manual MAXI	Automatic	
Reduction ratios 1 st	1:4.154	1:2.118	1:2.840	1:4.273	1:4.273	1:4.710	
2 nd	1:2.118	1:1.361	1:1.910	1:2.421	1:2.421	1:2.840	
3 rd	1:1.361	1:0.978	1:1.380	1:1.462	1:1.462	1:1.910	
4 th	1:0.978	1:0.756	1:1.000	1:1.047	1:0.955	1:1.380	
5 th	1:0.756	1:0.622	1:0.810	1:0.786	1:0.695	1:1.000	
6 th	1:0.622	-	1:0.700	1:0.625	1:0.552	1:0.810	
7 th	-	-	1:0.580	-	-	1:0.700	
8 th	-	-	1:0.480	-	-	1:0.580	
9 th	-	1:4.000	1:3.830	-	-	1:0.480	
R	1:4.000	1:4.867	1:4.585	1:4.182	1:4.182	1:3.830	
Final drive ratio	1:4.867	1:4.867	1:4.585	1:4.222	1:4.867	1:4.585	
Steering							
Type	electric rack and pinion power steering, with steering effort and energy consumption adaptation to vehicle speed						
Turning circle (kerb-to-kerb)	short wheelbase 11,1 m - medium wheelbase 12,5 m - medium-long wheelbase 13,6 m - long wheelbase 14,3 m - long wheelbase with extra overhang 15,3 m						
Braking system - D (disc)							
Type	dual H-I circuit; front and rear disc brakes, ABS with electronic brake force distribution						
Front: Ø mm	28q-30q: 280x24 self-ventilating 33q-35q: 280x28 self-ventilating	30q: 280x24 self-ventilating 33q-35q: 280x28 self-ventilating MAXI 35q-42,5q: 300x32 self-ventilating	30q: 280x28 self-ventilating 33q-35q-MAXI 35q-42,5q: 300x32 self-ventilating	30q: 280x28 self-ventilating 33q-35q-MAXI 35q-42,5q: 300x32 self-ventilating			33q-35q-MAXI 35q-40q: 300x32 self-ventilating
Rear: Ø mm	28q-30q-33q-35q: 280x16	30q-33q-35q-MAXI 35q: 280x16 MAXI 42,5q: 300x22	30q-33q-35q: 280x16 MAXI 35q-42,5q: 300x22	30q-33q-35q: 280x16 MAXI 35q-42,5q: 300x22			33q-35q: 280x16 MAXI 35q-42,5q: 300x22
Brake servo: Ø	28q-30q-33q-35q: 11"	30q-33q-35q-MAXI 35q: 11" MAXI 42,5q: 10" + 10" tandem	30q-33q-35q: 11" MAXI 42,5q: 10" + 10" tandem	30q-33q-35q: 11" MAXI 42,5q: 10" + 10" tandem			33q-35q: 11" MAXI 42,5q: 10" + 10" tandem
Suspension							
Front standard configuration	independent, MacPherson type with wishbones, coil springs, telescopic shock absorbers and anti-roll bar						
Rear standard configuration	rigid tubular axle with parabolic longitudinal leaf springs, telescopic shock absorbers and flexible side buffers						
Maximum permitted weight on front axle (kg)	28q: 1630kg - 30q: 1660kg - 33 q: 1800kg - 35q: 1880kg	30q: 1660kg - 33 q: 1800kg - 35q: 1880kg MAXI 35q-42,5q: 2100 kg	30q: 1660kg - 33 q: 1840kg - 35q: 1960kg	33 q: 1800kg - 35q: 1880kg MAXI 35q-42,5q: 2100 kg			33 q: 1840kg - 35q: 1960kg
Maximum permitted weight on rear axle (kg)	28q-30q: 1650kg - 33q: 1900kg - 35q: 2000kg	30q: 1650kg - 33q: 1900kg - 35q: 2000kg MAXI 35q-42,5q: 2400 kg	33q: 1900kg - 35q: 2000kg MAXI 35q-42,5q: 2400 kg				
Wheels							
Tyres	manual: 28q-30q-33q-35q 215/70 R 15 C (215/75 R 16 C optional, 225/70 R 15 C all season optional) - MAXI 35q 215/75 R 16 C - MAXI 42,5q 225/75 R 16 C (225/75 R 16 C all season optional) automatic: 30q 215/70 R 15 C (225/70 R 15 C all season optional) - 33q-35q-MAXI 35q 215/75 R 16 C MAXI 42,5q 225/75 R 16 C (225/75 R 16 C all season optional)						
Electrical system (12V)							
Battery capacity	105 Ah (L6)						
Alternator	220 A (LIN) high efficiency						
Stop&Start system with ECO function	standard on all range						
Weights - Capacities							
Max. towable weight (braked) (kg)	28q: 2000 30q-33q-35q: 2500	30q-33q-35q: 2500 35q MAXI: 3000 42,5q MAXI: 2250	30q-33q-35q: 2500 35q MAXI: 3000 42,5q MAXI: 2250	30q-33q-35q: 2500 35q MAXI: 3000 42,5q MAXI: 2250			
Fuel tank capacity (litres)	90 on all range reduced capacity of 75 and 60 available as option						
AdBlue fuel tank capacity (litres)	19						

EMISSION AND CONSUMPTION

PANEL VAN – GLAZED/HALF GLAZED VAN – GLAZED/HALF GLAZED CREW CAB VAN

				Multijet 120hp			Multijet 140hp						Multijet 180hp					
				MANUAL TRANSMISSION			MANUAL TRANSMISSION			AUTOMATIC TRANSMISSION			MANUAL TRANSMISSION			AUTOMATIC TRANSMISSION		
				WLTP fuel cons. (l/100 km)	WLTP CO ₂ emissions (g/km)	Top speed (km/h)	WLTP fuel cons. (l/100 km)	WLTP CO ₂ emissions (g/km)	Top speed (km/h)	WLTP fuel cons. (l/100 km)	WLTP CO ₂ emissions (g/km)	Top speed (km/h)	WLTP fuel cons. (l/100 km)	WLTP CO ₂ emissions (g/km)	Top speed (km/h)	WLTP fuel cons. (l/100 km)	WLTP CO ₂ emissions (g/km)	Top speed (km/h)
PANEL VAN																		
Range	Wheelbase	Lenght	Height															
PANEL VAN	3000	L1 - Short	H1 - Standard	7,8 - 8,4	205 - 220	148	7,9 - 8,5	206 - 223	156	8,9 - 9,4	236 - 249	155						
PANEL VAN	3450	L2 - Medium	H1 - Standard	7,9 - 8,6	208 - 225	148	7,9 - 8,6	207 - 224	156	9 - 9,5	237 - 251	155	8,1 - 8,7	214 - 230	170 (R15) 161 (R16)	9 - 9,5	237 - 251	169 (R15) 161 (R16)
PANEL VAN	3450	L2 - Medium	H2 - High	8,4 - 8,9	219 - 234	143	8,3 - 9	218 - 236	153	9,4 - 10	249 - 264	152	8,6 - 9,2	228 - 243	165 (R15) 161 (R16)	9,4 - 10	249 - 264	164 (R15) 161 (R16)
PANEL VAN	4035	L3 - Long	H2 - High	8,5 - 9	222 - 235	143	8,4 - 9,1	220 - 238	153	9,5 - 10	251 - 265	152	8,7 - 9,3	230 - 245	165 (R15) 161 (R16)	9,5 - 10,1	251 - 266	164 (R15) 161 (R16)
PANEL VAN	4035	L3 - Long	H3 - Super High				8,8 - 9,5	230 - 248	149	9,9 - 10,5	261 - 276	148						
MAXI PANEL VAN	3450	L2 - Medium	H2 - High				8,6 - 9	225 - 235	153	9,7 - 10	255 - 265	152	8,8 - 9,2	233 - 244	161	9,7 - 10,1	255 - 266	161
MAXI PANEL VAN	4035	L3 - Long	H2 - High				8,6 - 9	226 - 237	153	9,7 - 10,1	256 - 267	152	8,9 - 9,3	234 - 245	161	9,7 - 10,2	257 - 268	161
MAXI PANEL VAN	4035	L3 - Long	H3 - Super High				9 - 9,4	238 - 248	149	10,1 - 10,5	266 - 278	148	9 - 9,5	236 - 251	156	9,8 - 10,4	259 - 274	160
MAXI PANEL VAN	4035	L4 - Extra Long	H2 - High				8,6 - 9,1	227 - 238	153	9,7 - 10,2	255 - 268	152	8,8 - 9,4	233 - 247	161	9,7 - 10,2	255 - 269	161
MAXI PANEL VAN	4035	L4 - Extra Long	H3 - Super High				9,1 - 9,5	240 - 249	149	10,2 - 10,6	268 - 280	148	9,2 - 9,8	244 - 258	156	10,1 - 10,6	267 - 281	160
GLAZED / HALF-GLAZED VAN																		
Range	Wheelbase	Lenght	Height															
GLAZED / HALF-GLAZED VAN	3450	L2 - Medium	H2 - High				8,5 - 8,9	222 - 237	153				8,8 - 9,3	232 - 245	165 (R15) 161 (R16)	9,6 - 10,2	253 - 268	164 (R15) 161 (R16)
GLAZED / HALF-GLAZED VAN	4035	L3 - Long	H2 - High				8,5 - 9,1	224 - 237	153	9,6 - 10	254 - 265	152				9,7 - 10,1	255 - 266	164 (R15) 161 (R16)
MAXI GLAZED / HALF-GLAZED VAN	3450	L2 - Medium	H2 - High				8,6 - 9	225 - 236	153				8,8 - 9,2	233 - 243	161	9,7 - 10	255 - 264	161
MAXI GLAZED / HALF-GLAZED VAN	4035	L3 - Long	H2 - High				8,6 - 9	226 - 237	153				8,9 - 9,2	234 - 244	161	9,7 - 10,2	257 - 268	161
CREW CAB VAN (opt. 7EB)																		
Range	Wheelbase	Lenght	Height															
CREW CAB HALF-GLAZED VAN	3450	L2 - Medium	H2 - High				8,6 - 9,1	226 - 239	153				9 - 9,4	237 - 247	165 (R15) 161 (R16)	9,8 - 10,2	258 - 268	164 (R15) 161 (R16)
MAXI CREW CAB HALF-GLAZED VAN	3450	L2 - Medium	H2 - High				8,7 - 9,1	229 - 238	153				9 - 9,4	237 - 247	161	9,8 - 10,2	259 - 269	161
MAXI CREW CAB GLAZED / HALF-GLAZED VAN	4035	L3 - Long	H2 - High				8,8 - 9,1	230 - 240	153				9 - 9,4	238 - 248	161	9,9 - 10,3	261 - 271	161

EMISSION AND CONSUMPTION

TRUCK DROPSIDE - TRUCK 3 WAY TIPPER - TRUCK 1 WAY TIPPER - CREW CAB TRUCK
DROPSIDE - CREW CAB TRUCK 3 WAY TIPPER - CREW CAB TRUCK 1 WAY TIPPER

			Multijets 120hp			Multijets 140hp						Multijets 180hp					
			MANUAL TRANSMISSION			MANUAL TRANSMISSION			AUTOMATIC TRANSMISSION			MANUAL TRANSMISSION			AUTOMATIC TRANSMISSION		
			WLTP fuel cons. (l/100 km)	WLTP CO ₂ emissions (g/km)	Top speed (km/h)	WLTP fuel cons. (l/100 km)	WLTP CO ₂ emissions (g/km)	Top speed (km/h)	WLTP fuel cons. (l/100 km)	WLTP CO ₂ emissions (g/km)	Top speed (km/h)	WLTP fuel cons. (l/100 km)	WLTP CO ₂ emissions (g/km)	Top speed (km/h)	WLTP fuel cons. (l/100 km)	WLTP CO ₂ emissions (g/km)	Top speed (km/h)
TRUCK - DROPSIDE																	
Range	Wheelbase	Lenght															
TRUCK - DROPSIDE	3450	L2 - Medium	9,7 - 10,1	256 - 264	148	9,8 - 10,5	258 - 275	156									
TRUCK - DROPSIDE	3800	L2/3 - Medium/ Long	9,8 - 10,1	256 - 265	148	9,9 - 10,5	259 - 274	156									
TRUCK - DROPSIDE	4035	L3- Long	9,8 - 10,1	257 - 265	148	9,9 - 10,5	260 - 274	156	10,8 - 11,2	286 - 296	155						
TRUCK - DROPSIDE	4035	L4- Extra Long				9,9 - 10,5	261 - 275	156	10,9 - 11,2	287 - 295	155						
MAXI TRUCK - DROPSIDE	3450	L2 - Medium				9,9 - 10,3	259 - 271	156	10,8 - 11,1	285 - 294	155						
MAXI TRUCK - DROPSIDE	3800	L2/3 - Medium/ Long				9,9 - 10,4	260 - 272	156	10,8 - 11,2	286 - 295	155						
MAXI TRUCK - DROPSIDE	4035	L3- Long				10 - 10,4	261 - 272	156				9,9 - 10,5	260 - 274	161	10,8 - 11,1	284 - 293	161
MAXI TRUCK - DROPSIDE	4035	L4- Extra Long				9,9 - 10,4	260 - 273	156				10,8 - 11,1	261 - 275	161	10,8 - 11,1	285 - 294	161

TRUCK 3-WAY TIPPER (opt. 8P7)																	
Range	Wheelbase	Lenght															
TRUCK 3-WAY TIPPER	3450	L2 - Medium	10 - 10,4	263 - 271	148	10,3 - 10,7	269 - 281	156									
TRUCK 3-WAY TIPPER	3800	L2/3 - Medium/ Long	10 - 10,4	263 - 272	148	10,3 - 10,7	270 - 281	156									
TRUCK 3-WAY TIPPER	4035	L3 - Long	10,1 - 10,4	264 - 272	148	10,3 - 10,8	270 - 282	156	11,1 - 11,4	293 - 302	155						
MAXI TRUCK 3-WAY TIPPER	3450	L2 - Medium				10,3 - 10,6	270 - 279	156	11,1 - 11,4	293 - 301	155						
MAXI TRUCK 3-WAY TIPPER	3800	L2/3 - Medium/ Long				10,3 - 10,7	271 - 279	156	11,1 - 11,4	293 - 302	155						
MAXI TRUCK 3-WAY TIPPER	4035	L3 - Long				10,3 - 10,7	271 - 280	156				10,5 - 10,9	276 - 287	161	11,2 - 11,6	296 - 306	161

TRUCK 1-WAY TIPPER (opt. 4G5)																	
Range	Wheelbase	Lenght															
TRUCK 1-WAY TIPPER	3450	L2 - Medium	10 - 10,3	262 - 270	148	10,2 - 10,7	268 - 280	156									
TRUCK 1-WAY TIPPER	3800	L2/3 - Medium/ Long	10 - 10,3	262 - 271	148	10,3 - 10,7	269 - 280	156									
TRUCK 1-WAY TIPPER	4035	L3- Long	10 - 10,3	262 - 271	148	10,3 - 10,7	269 - 280	156	11,1 - 11,4	292 - 301	155						
MAXI TRUCK 1-WAY TIPPER	3450	L2 - Medium				10,3 - 10,6	270 - 278	156	11,1 - 11,4	292 - 301	155						
MAXI TRUCK 1-WAY TIPPER	3800	L2/3 - Medium/ Long				10,3 - 10,6	270 - 279	156	11,1 - 11,4	293 - 301	155						
MAXI TRUCK 1-WAY TIPPER	4035	L3 - Long				10,3 - 10,6	270 - 279	156				10,5 - 10,9	275 - 286	161	11,2 - 11,6	295 - 305	161


CREW CAB TRUCK - DROPSIDE																	
Range	Wheelbase	Lenght															
CREW CAB TRUCK - DROPSIDE	3450	L2 - Medium	9,9 - 10,2	260 - 268	148	10,2 - 10,6	266 - 277	156									
CREW CAB TRUCK - DROPSIDE	4035	L3 - Long	9,9 - 10,3	261 - 269	148	10,2 - 10,6	267 - 278	156	11 - 11,3	290 - 298	155						
MAXI CREW CAB TRUCK - DROPSIDE	3450	L2 - Medium				10,2 - 10,5	267 - 275	156	11 - 11,3	291 - 297	155						
MAXI CREW CAB TRUCK - DROPSIDE	4035	L3 - Long				10,2 - 10,5	268 - 276	156				10,3 - 10,7	271 - 280	161	11 - 11,3	290 - 299	161
MAXI CREW CAB TRUCK - DROPSIDE	4035	L4 - Extra Long				10,2 - 10,6	268 - 277	156				10,4 - 10,7	272 - 281	161	11 - 11,4	291 - 300	161

CREW CAB TRUCK 3-WAY TIPPER (opt. 8P7)																	
Range	Wheelbase	Lenght															
CREW CAB TRUCK 3-WAY TIPPER	4035	L3 - Long	10,2 - 10,6	267 - 277	148	10,5 - 10,9	273 - 286	156	11,3 - 11,6	296 - 306	155						
MAXI CREW CAB TRUCK 3-WAY TIPPER	4035	L3 - Long				10,5 - 10,8	274 - 284	156				10,8 - 11,2	282 - 293	161	11,4 - 11,8	301 - 312	161
MAXI CREW CAB TRUCK 3-WAY TIPPER	4035	L4 - Extra Long				10,5 - 10,9	275 - 285	156									

CREW CAB TRUCK 1-WAY TIPPER (opt. 4G5)																	
Range	Wheelbase	Lenght															
CREW CAB TRUCK 1-WAY TIPPER	3450	L2 - Medium	10,2 - 10,4	266 - 274	148	10,5 - 10,8	272 - 283	156									
MAXI CREW CAB TRUCK 1-WAY TIPPER	4035	L3 - Long				10,4 - 10,8	273 - 282	156				10,7 - 11,1	280 - 291	161	11,3 - 11,7	299 - 310	161
MAXI CREW CAB TRUCK 1-WAY TIPPER	4035	L4 - Extra Long				10,5 - 10,8	274 - 283	156				10,7 - 11,2	281 - 292	161	11,4 - 11,8	301 - 311	161

VAN

WHEELBASE 3000 MM

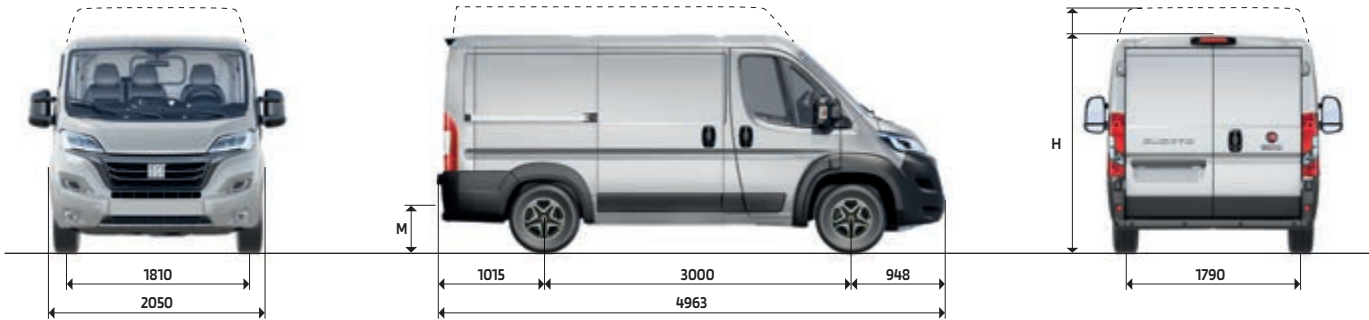


DIMENSIONS mm	VAN 28	VAN 30	VAN 33	VAN 35
Wheelbase	3000	3000	3000	3000
Maximum length	4963	4963	4963	4963
Maximum width	2050	2050	2050	2050
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
H Maximum height (unladen)	2254	2254	2254	2254
Front overhang	948	948	948	948
Rear overhang	1015	1015	1015	1015
REAR DOOR				
Width	1562	1562	1562	1562
Height	1520	1520	1520	1520
SIDE DOOR				
Width	1075	1075	1075	1075
Height	1485	1485	1485	1485
LOAD COMPARTMENT				
Maximum length	2670	2670	2670	2670
Maximum width	1870	1870	1870	1870
Width between wheel arches	1422	1422	1422	1422
Maximum height	1662	1662	1662	1662
M Load threshold height (unladen)	535	535	535	535

VOLUME 8 m³	VAN 28	VAN 30	VAN 33	VAN 35
Engine Multijets (hp)	120	120	140	140
Model version (MT)	290.SL2	290.OL2	290.OL3	290.9L3
GVW (kg)	2805	3000	3300	3500
Kerb weight (kg)	1945	1945	1945	1945
Payload (kg)	860	1055	1355	1555
WLTP fuel cons. (l/100 km)	7,8 - 8,2	7,9 - 8,4	7,9 - 8,4	7,9 - 8,5
WLTP CO ₂ emissions (g/km)	205 - 216	207 - 220	206 - 219	206 - 223
Model version (AT9)				290.9L4
GVW (kg)				3500
Kerb weight (kg)				2000
Payload (kg)				1500
WLTP fuel cons. (l/100 km)				8,9 - 9,4
WLTP CO ₂ emissions (g/km)				236 - 249

VAN

WHEELBASE 3450 MM

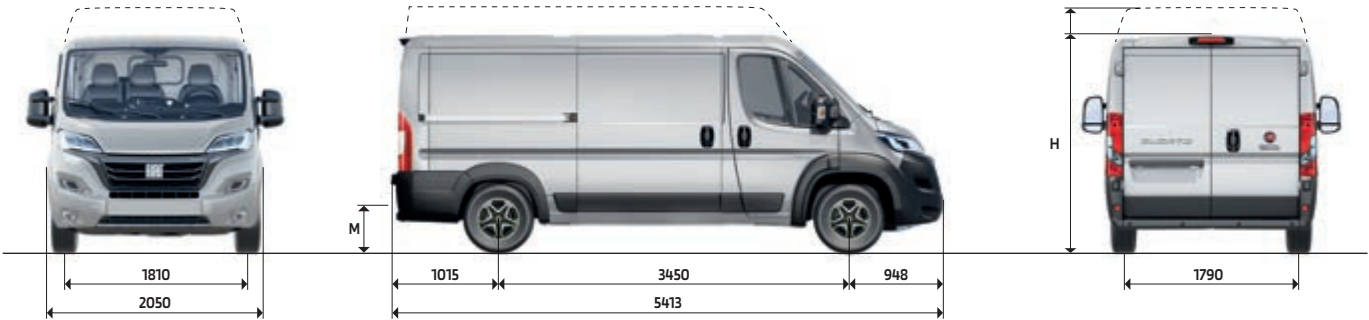


DIMENSIONS mm	VAN 30		VAN 33		VAN 35	
	STANDARD	HIGH	STANDARD	HIGH	STANDARD	HIGH
Wheelbase	3450	3450	3450	3450	3450	3450
Maximum length	5413	5413	5413	5413	5413	5413
Maximum width	2050	2050	2050	2050	2050	2050
Front track	1810	1810	1810	1810	1810	1810
Rear track	1790	1790	1790	1790	1790	1790
H Maximum height (unladen)	2254	2524	2254	2524	2254	2524
Front overhang	948	948	948	948	948	948
Rear overhang	1015	1015	1015	1015	1015	1015
REAR DOOR						
Width	1562	1562	1562	1562	1562	1562
Height	1520	1790	1520	1790	1520	1790
SIDE DOOR						
Width	1250	1250	1250	1250	1250	1250
Height	1485	1755	1485	1755	1485	1755
LOAD COMPARTMENT						
Maximum length	3120	3120	3120	3120	3120	3120
Maximum width	1870	1870	1870	1870	1870	1870
Width between wheel arches	1422	1422	1422	1422	1422	1422
Maximum height	1662	1932	1662	1932	1662	1932
M Load threshold height (unladen)	535	535	535	535	535	535

VOLUME 10 m³	VAN 30	VAN 33		VAN 35	
Engine Multijets (hp)	120	120	140	180	140
Model version (MT)	290.1L2	290.5L2	290.5L3	290.5L5	290.AL3
GVW (kg)	3000	3300	3300	3300	3500
Kerb weight (kg)	1985	1985	1985	2000	1985
Payload (kg)	1015	1315	1315	1300	1515
WLTP fuel cons. (l/100 km)	7,9 - 8,4	8 - 8,6	8 - 8,5	8,1 - 8,7	7,9 - 8,6
WLTP CO ₂ emissions (g/km)	208 - 221	210 - 225	210 - 223	214 - 229	207 - 224
Model version (AT9)					290.AL4
GVW (kg)					3500
Kerb weight (kg)					2040
Payload (kg)					1460
WLTP fuel cons. (l/100 km)					9 - 9,5
WLTP CO ₂ emissions (g/km)					237 - 251

VOLUME 11.5 m³	VAN 30 HIGH		VAN 33 HIGH		VAN 35 HIGH	
Engine Multijets (hp)	120	140	120	140	120	140
Model version (MT)	290.1G2	290.1G3	290.5G2	290.5G3	290.AG2	290.AG3
GVW (kg)	3000	3000	3300	3300	3500	3500
Kerb weight (kg)	2010	2010	2010	2010	2010	2025
Payload (kg)	990	990	1290	1290	1490	1475
WLTP fuel cons. (l/100 km)	8,4 - 8,8	8,3 - 8,9	8,5 - 8,9	8,4 - 9	8,5 - 8,9	8,4 - 9
WLTP CO ₂ emissions (g/km)	219 - 232	218 - 232	222 - 234	221 - 235	223 - 234	219 - 236
Model version (AT9)						290.AG4
GVW (kg)						3500
Kerb weight (kg)						2065
Payload (kg)						1435
WLTP fuel cons. (l/100 km)						9,4 - 10
WLTP CO ₂ emissions (g/km)						249 - 264

GLAZED/HALF-GLAZED VAN

WHEELBASE 3450 MM

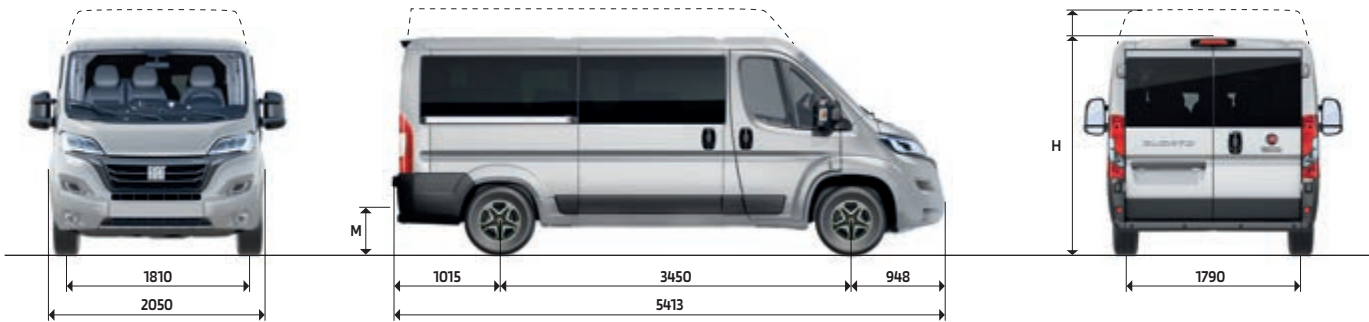


DIMENSIONS mm	VAN 33 HIGH	VAN 35 HIGH
Wheelbase	3450	3450
Maximum length	5413	5413
Maximum width	2050	2050
Front track	1810	1810
Rear track	1790	1790
H Maximum height (unladen)	2524	2524
Front overhang	948	948
Rear overhang	1015	1015
REAR DOOR		
Width	1562	1562
Height	1790	1790
SIDE DOOR		
Width	1250	1250
Height	1755	1755
LOAD COMPARTMENT		
Maximum length	3120	3120
Maximum width	1870	1870
Width between wheel arches	1422	1422
Maximum height	1932	1932
M Load threshold height (unladen)	535	535

VOLUME 11.5 m³	VAN 33 HIGH	VAN 35 HIGH	
Engine Multijets (hp)	140	140	180
Model version (MT)	290.5H3	290.AH3 / 290.AX3	290.AH5 / 290.AX5
GVW (kg)	3300	3500	3500
Kerb weight (kg)	2010	2010	2025
Payload (kg)	1290	1490	1475
WLTP fuel cons. (l/100 km)	8,6 – 9	8,5 – 9	8,8 – 9,2
WLTP CO ₂ emissions (g/km)	225 – 235	222 – 236	232 – 243
Model version (AT9)			290.AH6 / 290.AX6
GVW (kg)			3500
Kerb weight (kg)			2065
Payload (kg)			1435
WLTP fuel cons. (l/100 km)			9,6 – 10
WLTP CO ₂ emissions (g/km)			253 – 264

MAXI VAN

WHEELBASE 3450 MM

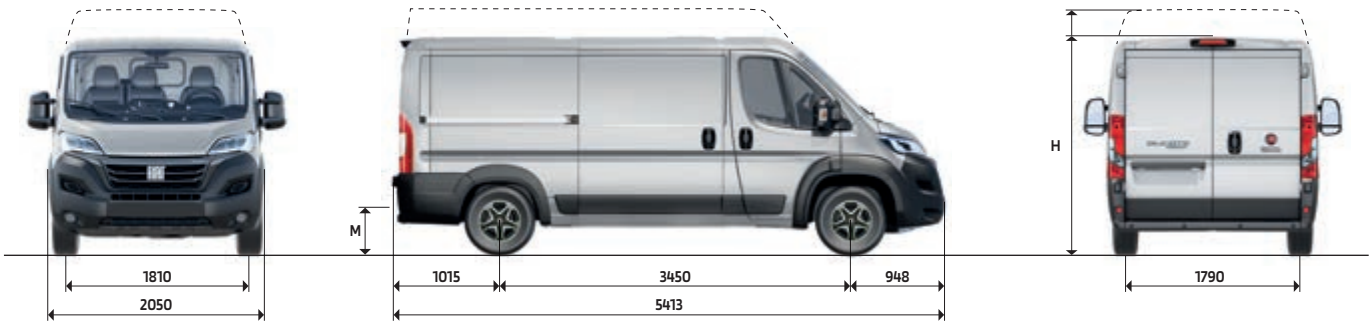


DIMENSIONS mm	MAXI VAN 35 HIGH
Wheelbase	3450
Maximum length	5413
Maximum width	2050
Front track	1810
Rear track	1790
H Maximum height (unladen)	2539
Front overhang	948
Rear overhang	1015
REAR DOOR	
Width	1562
Height	1790
SIDE DOOR	
Width	1250
Height	1755
LOAD COMPARTMENT	
Maximum length	3120
Maximum width	1870
Width between wheel arches	1422
Maximum height	1932
M Load threshold height (unladen)	550

VOLUME 11.5 m³	MAXI VAN 35 HIGH	
Engine Multijets (hp)	140	180
Model version (MT)	295.AG3	295.AG5
GVW (kg)	3500	3500
Kerb weight (kg)	2050	2065
Payload (kg)	1450	1435
WLTP fuel cons. (l/100 km)	8,6 – 9	8,8 – 9,2
WLTP CO ₂ emissions (g/km)	225 – 235	233 – 244
Model version (AT9)	295.AG4	295.AG6
GVW (kg)	3500	3500
Kerb weight (kg)	2065	2065
Payload (kg)	1435	1435
WLTP fuel cons. (l/100 km)	9,7 – 10	9,7 – 10,1
WLTP CO ₂ emissions (g/km)	255 – 265	255 – 266

MAXI GLAZED/HALF-GLAZED VAN

WHEELBASE 3450 MM

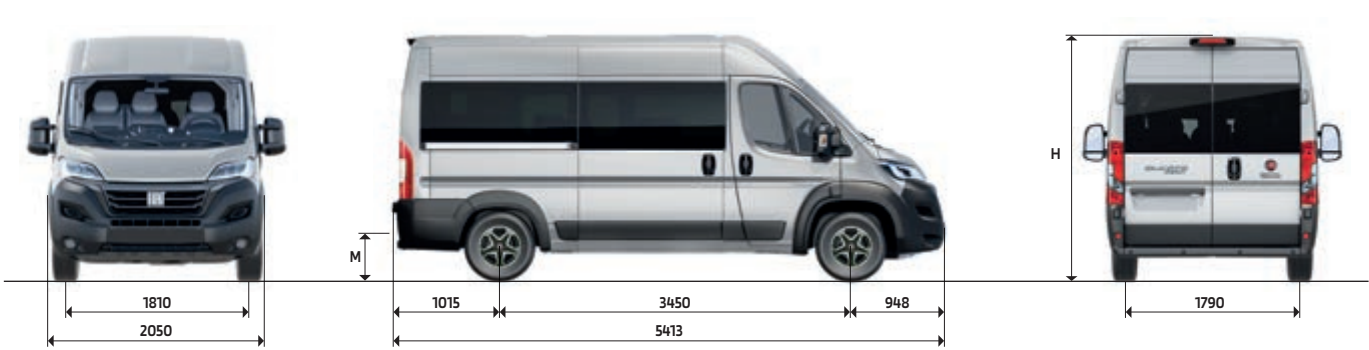


DIMENSIONS mm	MAXI VAN 35 HIGH	
Wheelbase	3450	
Maximum length	5413	
Maximum width	2050	
Front track	1810	
Rear track	1790	
H Maximum height (unladen)	2539	
Front overhang	948	
Rear overhang	1015	
REAR DOOR		
Width	1562	
Height	1790	
SIDE DOOR		
Width	1250	
Height	1755	
LOAD COMPARTMENT		
Maximum length	3120	
Maximum width	1870	
Width between wheel arches	1422	
Maximum height	1932	
M Load threshold height (unladen)	550	

VOLUME 11.5 m³	MAXI VAN 35 HIGH	
Engine Multijets (hp)	140	180
Model version (MT)	295.AX3	295.AX5
GVW (kg)	3500	3500
Kerb weight (kg)	2050	2065
Payload (kg)	1450	1435
WLTP fuel cons. (l/100 km)	8,6 – 9	8,8 – 9,2
WLTP CO ₂ emissions (g/km)	225 – 235	233 – 244
Model version (AT9)		295.AX6
GVW (kg)		3500
Kerb weight (kg)		2065
Payload (kg)		1435
WLTP fuel cons. (l/100 km)		9,7 – 10,1
WLTP CO ₂ emissions (g/km)		255 – 266

VAN

WHEELBASE 4035 MM

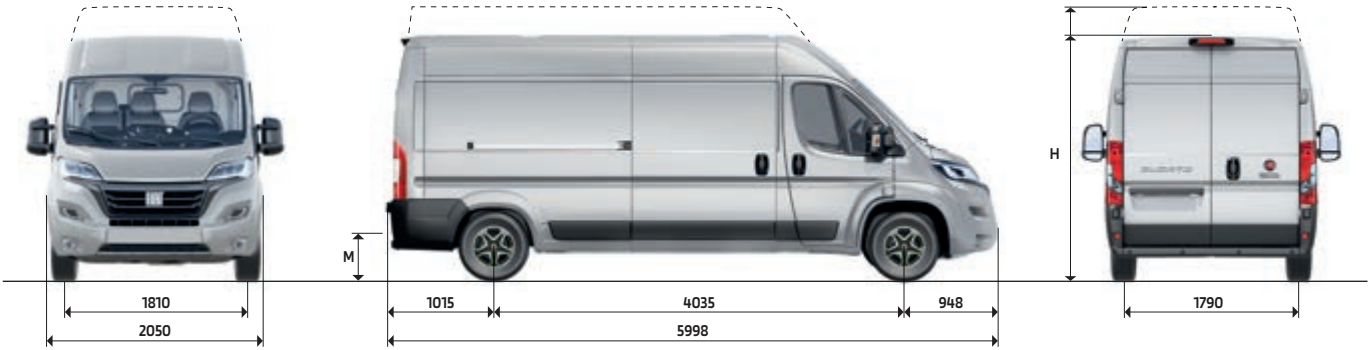


DIMENSIONS mm	VAN 33	VAN 35	
	HIGH	HIGH	SUPER HIGH
Wheelbase	4035	4035	4035
Maximum length	5998	5998	5998
Maximum width	2050	2050	2050
Front track	1810	1810	1810
Rear track	1790	1790	1790
H Maximum height (unladen)	2524	2524	2764
Front overhang	948	948	948
Rear overhang	1015	1015	1015
REAR DOOR			
Width	1562	1562	1562
Height	1790	1790	2030
SIDE DOOR			
Width	1250	1250	1250
Height	1755	1755	1755
LOAD COMPARTMENT			
Maximum length	3705	3705	3705
Maximum width	1870	1870	1870
Width between wheel arches	1422	1422	1422
Maximum height	1932	1932	2172
M Load threshold height (unladen)	535	535	535

VOLUME 13 m³	VAN 33 HIGH		VAN 35 HIGH	
Engine Multijets (hp)	120	140	140	180
Model version (MT)	290.6G2	290.6G3	290.BG3	290.BG5
GVW (kg)	3300	3300	3500	3500
Kerb weight (kg)	2060	2060	2060	2075
Payload (kg)	1240	1240	1440	1425
WLTP fuel cons. (l/100 km)	8,5 – 9	8,5 – 9	8,4 – 9,1	8,7 – 9,3
WLTP CO ₂ emissions (g/km)	222 – 235	222 – 237	220 – 238	230 – 245
Model version (AT9)			290.BG4	290.BG6
GVW (kg)			3500	3500
Kerb weight (kg)			2115	2115
Payload (kg)			1385	1385
WLTP fuel cons. (l/100 km)			9,5 – 10	9,5 – 10,1
WLTP CO ₂ emissions (g/km)			251 – 265	251 – 266

VOLUME 15 m³	VAN 35 SUPER HIGH	
Engine Multijets (hp)	140	
Model version (MT)	290.BA3	
GVW (kg)	3500	
Kerb weight (kg)	2085	
Payload (kg)	1415	
WLTP fuel cons. (l/100 km)	8,8 – 9,5	
WLTP CO ₂ emissions (g/km)	230 – 248	
Model version (AT9)	290.BA4	
GVW (kg)	3500	
Kerb weight (kg)	2140	
Payload (kg)	1360	
WLTP fuel cons. (l/100 km)	9,9 – 10,5	
WLTP CO ₂ emissions (g/km)	261 – 276	

GLAZED/HALF-GLAZED VAN

WHEELBASE 4035 MM

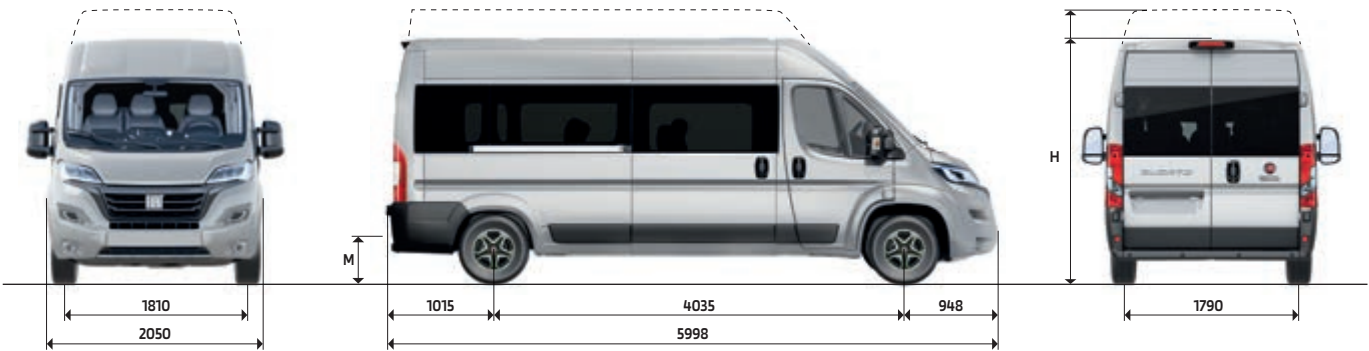


DIMENSIONS mm	VAN 35 HIGH	
Wheelbase	4035	
Maximum length	5998	
Maximum width	2050	
Front track	1810	
Rear track	1790	
H Maximum height (unladen)	2524	
Front overhang	948	
Rear overhang	1015	
REAR DOOR		
Width	1562	
Height	1790	
SIDE DOOR		
Width	1250	
Height	1755	
LOAD COMPARTMENT		
Maximum length	3705	
Maximum width	1870	
Width between wheel arches	1422	
Maximum height	1932	
M Load threshold height (unladen)	535	

VOLUME 13 m³	VAN 35 HIGH	
Engine Multijets (hp)	140	180
Model version (MT)	290.BH3	
GVW (kg)	3500	
Kerb weight (kg)	2060	
Payload (kg)	1440	
WLTP fuel cons. (l/100 km)	8,5 - 9,1	
WLTP CO ₂ emissions (g/km)	224 - 237	
Model version (AT9)	290.BH4	290.BH6
GVW (kg)	3500	3500
Kerb weight (kg)	2115	2115
Payload (kg)	1385	1385
WLTP fuel cons. (l/100 km)	9,6 - 10	9,7 - 10,1
WLTP CO ₂ emissions (g/km)	254 - 265	255 - 266

MAXI VAN

WHEELBASE 4035 MM

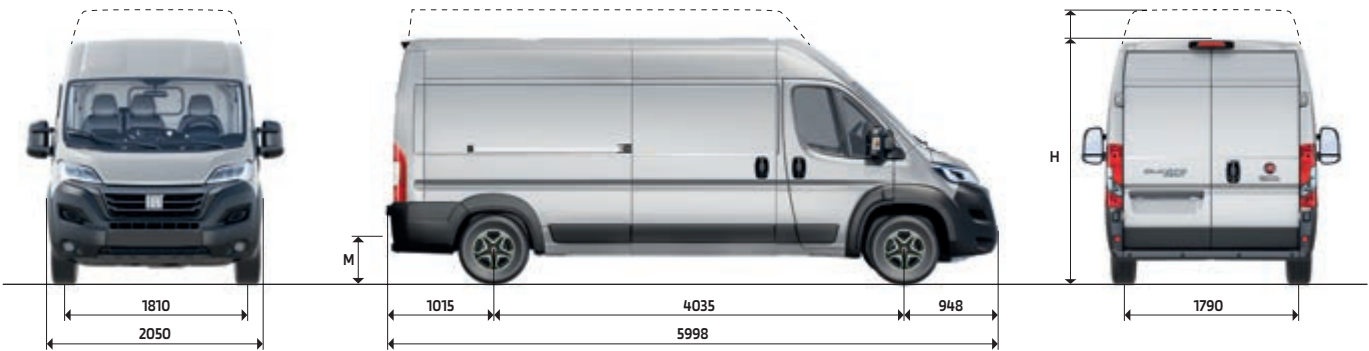

DIMENSIONS mm	MAXI VAN 35		MAXI VAN 40
	HIGH	SUPER HIGH	HIGH
Wheelbase	4035	4035	4035
Maximum length	5998	5998	5998
Maximum width	2050	2050	2050
Front track	1810	1810	1810
Rear track	1790	1790	1790
H Maximum height (unladen)	2534	2774	2534
Front overhang	948	948	948
Rear overhang	1015	1015	1015
REAR DOOR			
Width	1562	1562	1562
Height	1790	2030	1790
SIDE DOOR			
Width	1250	1250	1250
Height	1755	1755	1755
LOAD COMPARTMENT			
Maximum length	3705	3705	3705
Maximum width	1870	1870	1870
Width between wheel arches	1422	1422	1422
Maximum height	1932	2172	1932
M Load threshold height (unladen)	550	550	550

VOLUME 13 m³	MAXI VAN 35 HIGH		MAXI VAN 40 HIGH	
Engine Multijets (hp)	140	180	140	180
Model version (MT)	295.BG3	295.BG5	295.GG3	295.GG5
GVW (kg)	3500	3500	4250	4250
Kerb weight (kg)	2100	2115	2145	2160
Payload (kg)	1400	1385	2105	2090
WLTP fuel cons. (l/100 km)	8,6 - 9	8,9 - 9,3	7,7 - 8,2	7,8 - 8,4
WLTP CO ₂ emissions (g/km)	226 - 237	234 - 245	201 - 214	207 - 221
Model version (AT9)	295.BG4	295.BG6	295.GG4	295.GG6
GVW (kg)	3500	3500	4250	4250
Kerb weight (kg)	2115	2115	2160	2160
Payload (kg)	1385	1385	2090	2090
WLTP fuel cons. (l/100 km)	9,7 - 10,1	9,7 - 10,2	8,7 - 9,2	8,7 - 9,2
WLTP CO ₂ emissions (g/km)	256 - 267	257 - 268	230 - 243	229 - 243


VOLUME 15 m³	MAXI VAN 35 SUPER HIGH	
Engine Multijets (hp)	140	180
Model version (MT)	295.BA3	295.BA5
GVW (kg)	3500	3500
Kerb weight (kg)	2125	2140
Payload (kg)	1375	1360
WLTP fuel cons. (l/100 km)	9 - 9,4	9 - 9,5
WLTP CO ₂ emissions (g/km)	238 - 248	236 - 251
Model version (AT9)	295.BA4	295.BA6
GVW (kg)	3500	3500
Kerb weight (kg)	2140	2140
Payload (kg)	1360	1360
WLTP fuel cons. (l/100 km)	10,1 - 10,5	9,8 - 10,4
WLTP CO ₂ emissions (g/km)	266 - 278	259 - 274

Note: WLTP values for emission and consumption not requested for N2 homologated vehicles. Values on N2 versions include the speed limitation at 90km/h

- GVW 4250 kg with opt 7MB (Incomplete vehicle homologation, needed second stage homologation)
- ♦ Maxi Van 40 High GVW with opt 48D that increase the weight from 4005kg to 4250kg

MAXI GLAZED/HALF-GLAZED VAN

WHEELBASE 4035 MM

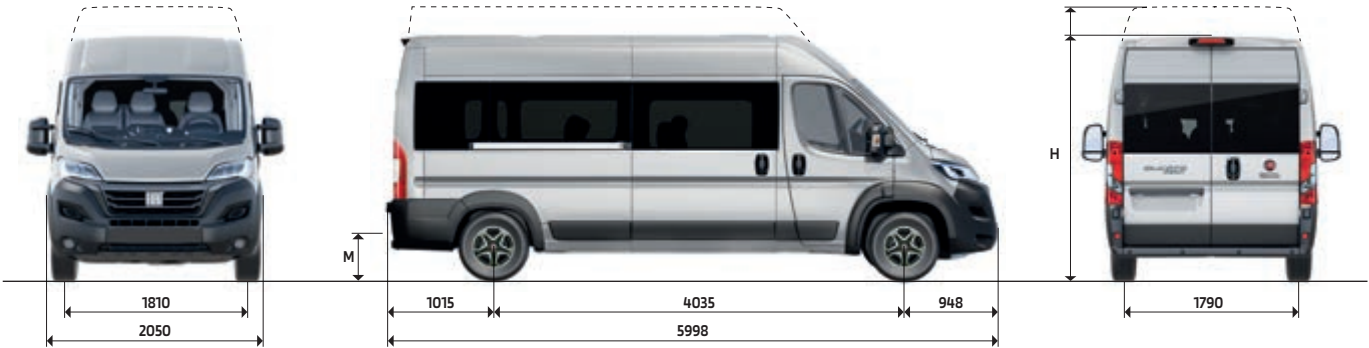


DIMENSIONS mm	MAXI VAN 35 HIGH	MAXI VAN 40 HIGH
Wheelbase	4035	4035
Maximum length	5998	5998
Maximum width	2050	2050
Front track	1810	1810
Rear track	1790	1790
H Maximum height (unladen)	2534	2534
Front overhang	948	948
Rear overhang	1015	1015
REAR DOOR		
Width	1562	1562
Height	1790	1790
SIDE DOOR		
Width	1250	1250
Height	1755	1755
LOAD COMPARTMENT		
Maximum length	3705	3705
Maximum width	1870	1870
Width between wheel arches	1422	1422
Maximum height	1932	1932
M Load threshold height (unladen)	550	550

VOLUME 13 m³	MAXI VAN 35 HIGH		MAXI VAN 40 HIGH	
Engine Multijets (hp)	140	180	140	180
Model version (MT)	295.BH3 / 295.BX3	295.BX5	295.GH3	
GVW (kg)	3500	3500	4250	
Kerb weight (kg)	2100	2115	2145	
Payload (kg)	1400	1385	2105	
WLTP fuel cons. (l/100 km)	8,6 - 9	8,9 - 9,3	7,7 - 8,2	
WLTP CO ₂ emissions (g/km)	226 - 237	234 - 245	201 - 214	
Model version (AT9)		295.BH6 / 295.BX6		295.GH6
GVW (kg)		3500		4250
Kerb weight (kg)		2115		2160
Payload (kg)		1385		2090
WLTP fuel cons. (l/100 km)		9,7 - 10,2		8,7 - 9,2
WLTP CO ₂ emissions (g/km)		257 - 268		229 - 243

MAXI VAN XL

WHEELBASE 4035 MM

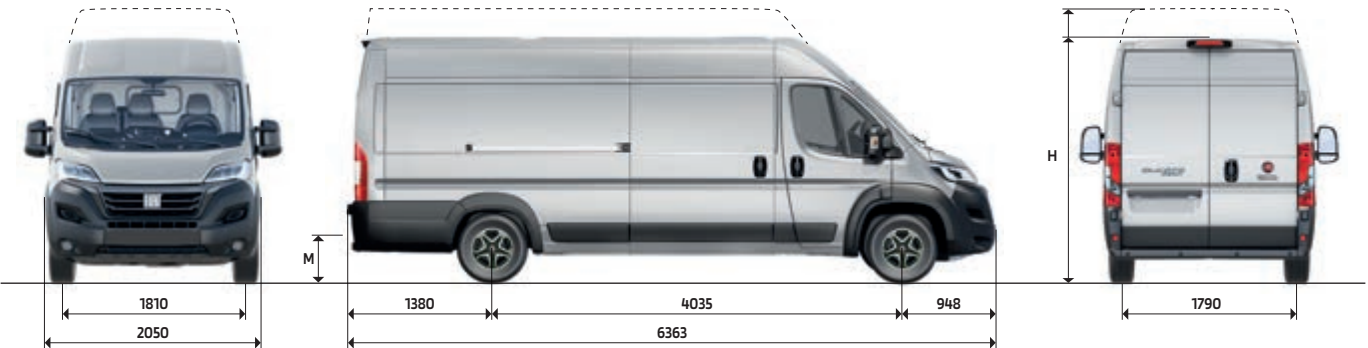

DIMENSIONS mm	MAXI VAN 35 XL		MAXI VAN 40 XL	
	HIGH	SUPER HIGH	HIGH	SUPER HIGH
Wheelbase	4035	4035	4035	4035
Maximum length	6363	6363	6363	6363
Maximum width	2050	2050	2050	2050
Front track	1810	1810	1810	1810
Rear track	1790	1790	1790	1790
H Maximum height (unladen)	2534	2774	2534	2779
Front overhang	948	948	948	948
Rear overhang	1380	1380	1380	1380
REAR DOOR				
Width	1562	1562	1562	1562
Height	1790	2030	1790	2030
SIDE DOOR				
Width	1250	1250	1250	1250
Height	1755	1755	1755	1755
LOAD COMPARTMENT				
Maximum length	4070	4070	4070	4070
Maximum width	1870	1870	1870	1870
Width between wheel arches	1422	1422	1422	1422
Maximum height	1932	2172	1932	2172
M Load threshold height (unladen)	550	550	550	550

VOLUME 15 m³	MAXI VAN 35 XL		MAXI VAN 40 XL	
Engine Multijets (hp)	140	180	140	180
Model version (MT)	295.CG3	295.CG5	295.HG3	295.HG5
GVW (kg)	3500	3500	4250	4250
Kerb weight (kg)	2145	2160	2190	2205
Payload (kg)	1355	1340	2060	2045
WLTP fuel cons. (l/100 km)	8,6 - 9,1	8,8 - 9,4	7,7 - 8,2	7,9 - 8,4
WLTP CO ₂ emissions (g/km)	227 - 238	233 - 247	202 - 215	208 - 222
Model version (AT9)	295.CG4	295.CG6		295.HG6
GVW (kg)	3500	3500		4250
Kerb weight (kg)	2160	2160		2205
Payload (kg)	1340	1340		2045
WLTP fuel cons. (l/100 km)	9,7 - 10,2	9,7 - 10,2		8,8 - 9,3
WLTP CO ₂ emissions (g/km)	255 - 268	255 - 269		231 - 245

VOLUME 17 m³	MAXI VAN 35 XL SUPER HIGH		MAXI VAN 40 XL SUPER HIGH
Engine Multijets (hp)	140	180	180
Model version (MT)	295.CA3	295.CA5	295.HA5
GVW (kg)	3500	3500	4250
Kerb weight (kg)	2175	2190	2235
Payload (kg)	1325	1310	2015
WLTP fuel cons. (l/100 km)	9,1 - 9,5	9,2 - 9,8	8,2 - 8,8
WLTP CO ₂ emissions (g/km)	240 - 249	244 - 258	217 - 231
Model version (AT9)	295.CA4	295.CA6	295.HA6
GVW (kg)	3500	3500	4250
Kerb weight (kg)	2190	2190	2235
Payload (kg)	1310	1310	2015
WLTP fuel cons. (l/100 km)	10,2 - 10,6	10,1 - 10,6	9,1 - 9,6
WLTP CO ₂ emissions (g/km)	268 - 280	267 - 281	240 - 254

MAXI VAN GLAZED XL

WHEELBASE 4035 MM




DIMENSIONS mm	MAXI VAN 40 XL HIGH	
Wheelbase	4035	
Maximum length	6363	
Maximum width	2050	
Front track	1810	
Rear track	1790	
H Maximum height (unladen)	2539	
Front overhang	948	
Rear overhang	1380	
REAR DOOR		
Width	1562	
Height	1790	
SIDE DOOR		
Width	1250	
Height	1755	
LOAD COMPARTMENT		
Maximum length	4070	
Maximum width	1870	
Width between wheel arches	1422	
Maximum height	1932	
M Load threshold height (unladen)	550	

VOLUME 15 m³	MAXI VAN 40 XL HIGH	
Engine Multijets (hp)	140	180
Model version (MT)	295.HH3	
GVW (kg)	4250	
Kerb weight (kg)	2190	
Payload (kg)	2060	
WLTP fuel cons. (l/100 km)	7,7 - 8,2	
WLTP CO ₂ emissions (g/km)	202 - 215	
Model version (AT9)		295.HH6
GVW (kg)		4250
Kerb weight (kg)		2205
Payload (kg)		2045
WLTP fuel cons. (l/100 km)		8,7 - 9,2
WLTP CO ₂ emissions (g/km)		230 - 244

VAN CREW CAB

(OPT. 7EB)

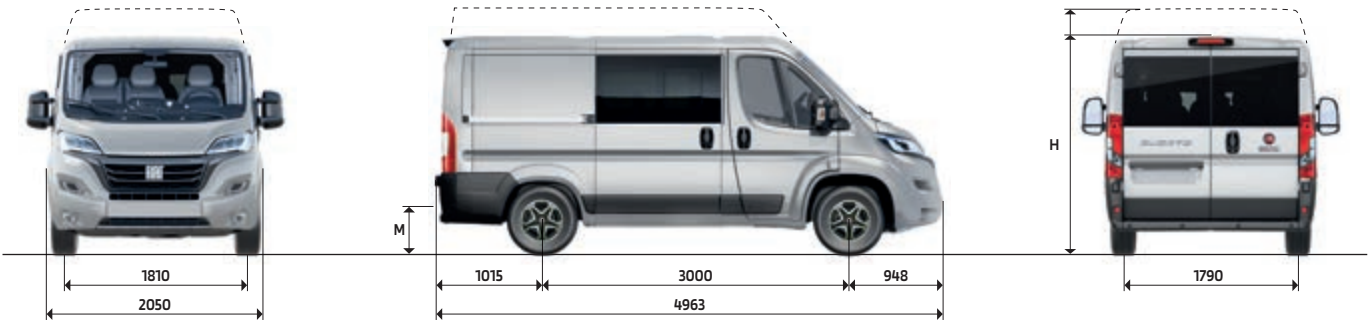

DIMENSIONS mm	CREW CAB 35	MAXI CREW CAB 35	
	HIGH	STANDARD	HIGH
Wheelbase	3450	3450	4035
Maximum length	5413	5413	5998
Maximum width	2050	2050	2050
Front track	1810	1810	1810
Rear track	1790	1790	1790
H Maximum height (unladen)	2524	2539	2534
Front overhang	948	948	948
Rear overhang	1015	1015	1015
REAR DOOR			
Width	1562	1562	1562
Height	1790	1790	1790
SIDE DOOR			
Width	1250	1250	1250
Height	1755	1755	1755
LOAD COMPARTMENT			
Maximum length	1930	1930	2515
Maximum width	1870	1870	1870
Width between wheel arches	1422	1422	1422
Maximum height	1932	1932	1932
M Load threshold height (unladen)	535	550	550

VOLUME 8 M³	CREW CAB 35 HIGH		MAXI CREW CAB 35 HIGH	
Wheelbase 3450 high roof				
Engine Multijets (hp)	140	180	140	180
Model version (MT)	140	180	140	180
GVW (kg)	290.AX3 + OPT 7EB	290.AX5 + OPT 7EB	295.AX3 + OPT 7EB	295.AX5 + OPT 7EB
Kerb weight (kg)	3500	3500	3500	3500
Payload (kg)	2145	2160	2185	2220
WLTP fuel cons. (l/100 km)	1355	1340	1315	1280
WLTP CO ₂ emissions (g/km)	8,6 - 9,1	9 - 9,4	8,7 - 9,1	9 - 9,4
Model version (AT9)		237 - 247		237 - 247
GVW (kg)		290.AX6 + OPT 7EB		295.AX6 + OPT 7EB
Kerb weight (kg)		3500		3500
Payload (kg)		2200		2220
WLTP fuel cons. (l/100 km)		1300		1280
WLTP CO ₂ emissions (g/km)		9,8 - 10,2		9,8 - 10,2

VOLUME 10.5 M³	MAXI CREW CAB 35 HIGH	
Wheelbase 4035 high roof		
Engine Multijets (hp)	140	180
Model version (MT)	295.BH3 / 295.BX3 + OPT 7EB	295.BX5 + OPT 7EB
GVW (kg)	3500	3500
Kerb weight (kg)	2235	2250
Payload (kg)	1265	1250
WLTP fuel cons. (l/100 km)	8,8 - 9,1	9 - 9,4
WLTP CO ₂ emissions (g/km)	230 - 240	238 - 248
Model version (AT9)		295.BH6 / 295.BXT + OPT 7EB
GVW (kg)		3500
Kerb weight (kg)		2250
Payload (kg)		1250
WLTP fuel cons. (l/100 km)		9,9 - 10,3
WLTP CO ₂ emissions (g/km)		261 - 271



Trim levels of models and options may vary due to specific market or legal requirements. The data, descriptions and illustrations contained in this brochure are for illustrative purposes and are valid at the date of publication. Some equipment described and/or illustrated in this brochure is optional. Refer to the price list for full information. Fiat Professional may change the models described in this brochure at any time for technical or commercial reasons. Fiat Professional® is a registered trademark of FCA US LLC a subsidiary of Stellantis N.V. Fiat Professional - S - 01/2023 - Web version.

Edition: January 2023.

www.fiatprofessional.com

FIAT
P R O F E S S I O N A L