





### Features :

- ☒ Create UV-C Light with Peak Wavelength of 253.7nm / Additional 185nm for Ozone
- ☒ Use Low Pressure Mercury Vapor to Create Germicidal UV-C Light
- ☒ Wide Range of Industrial & Medical Disinfection Application
- ☒ Available in Tubular Shape & H-Shape [PL Models]
- ☒ Lifetime of 8,000 -10,000 hrs. with 1 Year Warranty

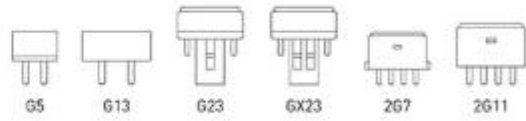

Model No.	Dimension DxL(mm)	Cap	Rated Power	Spectrum	UV Intensity uw/cm 2	PCS/CTN	CTN MEAS. (cm)
XGYT5-UVC-4W	Φ16x135.9	G5	4W	UVC	11	500	47.5x17.5x39
XGYT5-UVC-6W	Φ16x212.1	G5	6W	UVC	17	500	47.5x24.5x39
XGYT5-UVC-8W	Φ16x288.3	G5	8W	UVC	22	200	47.5x32.5x17
XGYT5-HO-UVC-15W	Φ16x288.3	G5	15W	UVC	50	200	47.5x32.5x17
XGYT5-UVC-14W	Φ16x549	G5	14W	UVC	45	100	60x19.5x20
XGYT5-UVC-21W	Φ16x849	G5	21W	UVC	68	100	90x19.5x20
XGYT5-UVC-28W	Φ16x1149	G5	21W	UVC	92	100	120x19.5x20
XGYT8-UVC-10W	Φ26x331	G13	10W	UVC	30	100	37x29.5x30
XGYT8-UVC-15W	Φ26x437.4	G13	15W	UVC	50	100	47x29.5x30
XGYT8-UVC-18W	Φ26x589.8	G13	18W	UVC	62	25	64x15.5x15.5
XGYT8-UVC-30W	Φ26x894.6	G13	30W	UVC	100	25	94x15.5x15.5
XGYT8-UVC-36W	Φ26x1199.4	G13	36W	UVC	135	25	125x15.5x15.5