



# **Autotransfusion (ATS)**

Blood transfusion in cardiac surgery is a risk factor for increased hospital length of stay in adult patients.<sup>1,2</sup> ATS plays a key role as part of an effective blood management strategy.<sup>3</sup>

The procedure involves the collection of a patient's own blood from surgical sites and transfer back into the same patient during or after surgery, as required.<sup>4</sup>

ATS has two main advantages:5

- Mitigate the risk of transfusion-transmitted infections from allogenic blood
- Mitigate the risk of alloimmunisation (reaction to antigens on allogenic blood)

ATS lowers the transfusion rates during and after Cardiac Surgery.<sup>6,7</sup> Outside of cardiac surgery, ATS reduces the number of packed RBCs by -1.1 units and the length of stay by -1.0 day.<sup>8</sup>

#### **Examples of indications for ATS<sup>9</sup>**

	Specialty	Surgical procedure
<b>(5)</b>	Cardiac	<ul> <li>Valve replacement</li> <li>Redo bypass grafting</li> <li>CABG<sup>10</sup></li> <li>Aortic dissection</li> </ul>
	Orthopedics	<ul> <li>Hip or knee replacement surgery</li> <li>Major spine surgery</li> <li>Bilateral knee replacement</li> <li>Revision of hip replacement</li> </ul>
•	Obstetrics	<ul> <li>Uncontrollable hemorrhage during/after childbirth</li> <li>C sections<sup>11</sup></li> <li>Pregnancies at risk of high bleeding</li> </ul>
<b>3</b> 3	Urology	<ul><li>Radical retropubic prostatectomy</li><li>Cystectomy</li><li>Nephrectomy</li></ul>
	Neurosurgery	Giant basilar aneurysm
6	Vascular	Thoraco-abdominal/abdominal aortic aneurysm repair
•	Other	<ul><li>Liver transplant</li><li>Unexpected massive blood loss</li></ul>

# Autotransfusion improves outcomes, reduces the need for homologous blood and lowers costs.<sup>7,12</sup>

Technical claims supported by LivaNova data on file. **1.** Galas F, et al. Blood transfusion in cardiac surgery is a risk factor for increased hospital length of stay in adult patients. *J Cardiothorac Surg.* 2013;8:54 DOI: https://doi.org/10.1186/1749-8090-8-54. **2.** Zelinka ES, et al. The Perfusionist's Role in a Collaborative Multidisciplinary Approach to Blood Transfusion Reduction in Cardiac Surgery. *J Extra Corpor Technol.* 2010;42:45–51. **3.** Eybohm et al. Washed cell salvage in surgical patients A review and meta-analysis of prospective randomized trials under PRISMA. *Medicine* (Baltimore). 2016 Aug;95(31):e4490. **4.** Carless PA, et al. Cell salvage for minimising perioperative allogeneic blood transfusion. *Cochrane Database Syst Rev.* 2010:CD001888 **5.** Rossi U. Medicine today. Available at: http://www.ztm.si/uploads/publication/1090/1094.pdf. Accessed December 2020. **6.** Vonk et al. Intraoperative cell salvage is associated with reduced postoperative blood loss and transfusion requirements in cardiac surgery: a cohort study. *Transfusion.* 2013 Nov;53(11):2782–9. **7.** Côté et al. Efficacy of intraoperative cell salvage in decreasing perioperative blood transfusion rates in first-time cardiac surgery patients: a retrospective study. *Can J Surg.* 2016 Sep;59(5):330–6. **8.** Waters et al. Clinical Efficacy of Washed Autotransfusion in Non-cardiac Settings Such as Vascular, Orthopedic and Obstetric Surgery: Subgroup Analysis of a Systematic Review and Meta-analysis of Randomized Control Trials. The Anesthesiology Annual Meeting A2296 October 22, 2017 http://www.asaabstracts.com/strands/asaabstracts/abstract. htm?year=2017&index=4&absnum=3584 **9.** Esper AS, Waters JH. Intra-operative cell salvage: a fresh look at the indications and contraindications. *Blood Transfus.* 2011;9:139–47. **10.** Schmidt, et al. Autotransfusion After Coronary Artery Bypass Grafting Halves the Number of Patients Needing Blood Transfusion. *Ann Thorac Surg.* 1996; 61:1177–81. **11.** Ashworth A, Klein AA. Cell salvage as part of a

# XTRA® ATS System: The complete solution for blood management

#### **Excellent Performance from Small to Massive Bleeding**<sup>1,2</sup>

LivaNova offers a long legacy in developing, producing and servicing our heart-lung machines (HLM), we are recognized as the world's #1 cardiopulmonary bypass company with perfusionists worldwide are benefiting from the reliability of our machines.

XTRA® leverages the HLM legacy but also brings together three decades of experience and improvements in cell salvage procedures, treating more than 0.5 million patients per year.

With its refined ergonomics and reduced footprint for manageable procedures, XTRA® brings you:



#### With Touch Screen user interface

The full-colour LCD, TFT (8.4") with a large view area (172x130 mm) and the touch screen technology allow optimal visibility of the information displayed and total control at your fingertips.

Taking inspiration from our world leading HLM machines, the XTRA® user interface displays all the information you need by means of modular displays that can be opened or closed at your desire and offers complete control of the system throughout intuitive and easy-to-navigate menu pages.



Technical claims supported by LivaNova data on file. **1.** Bauman, et al. Evaluation of the minimum volume of salvaged blood required for the successful use of two different autotransfusion device. *Pediatric Anesthesia*. 2015. 25:258–264. **2.** Seyfried, et al. The impact of bowl size, prograr setup, and blood hematocrit on the performance of a discontinuous autotransfusion system. *Transfusion*. 2017 Mar;57(3):589-598.

## **Advanced Data Management**

Experience complete control over your data. From the tally screen you will be able to visualize case information at anytime, print a report, or download multiple cases on a USB memory stick.

- Internal memory capable of storing thousands of past cases
- Integrated ink printer, producing permanent case printouts, ensuring complete traceability
- Functional integration with the S5® HLM thanks to CONNECT™

#### **Dual sensor technology**

- The Dual RBC detector technology in XTRA® is composed of two optical sensors allowing a high filling of the bowl and thus an excellent supernatant washout and high outlet haematocrit
- The Hct sensor is an integrated, non-invasive, optical sensor providing information on RBC concentration of the inlet blood during Fill phase and outlet blood during the Empty phase providing on-screen information at-a-glance on the wash quality by a visual indicator







Technical claims supported by LivaNova data on file.

# XTRA® Flexibility<sup>1</sup>

- Flexible choice of intra, post-op and sequestration protocols
- Wide range of bowl sizes and disposables to choose from
- Low minimum required Red Blood Cell mass to process
- Fast Processing to manage high volume blood loss
- Complete control over your data, printed or stored

#### **INTRA-OPERATIVE FACTORY PROTOCOLS**

# **Popt**

#### Designed to obtain:

- Very high Hct<sup>2</sup>
- Excellent supernatant removal<sup>3</sup>
- Good processing speed<sup>3</sup>

#### Achieved by:

- Two step filling at different flow rates and automated stand-by
- Dual RBC detector technology for optimal bowl filling (active for XTRA® BOWL 55 and XTRA® BOWL 225)

#### **Pstd**



#### Designed to obtain:

- High processing speed (with XTRA® BOWL 225)3
- Good hematocrit<sup>3</sup>
- Good wash quality3

#### Achieved by:

- One-step automatic filling
- Possibility to adjust flows (filling, washing, emptying)
- High wash and empty flows

#### **Pfat**

- Designed to obtain:
- Removal of fat particles
- Excellent supernatant removal
- Good Hematocrit


#### Achieved by:

- Newly designed fat removal phase
- High wash flows

#### **POST-OPERATIVE FACTORY PROTOCOL**

#### Post-op





#### applications Achieved by:

- Activating the same settings of the Popt
- Automatically switching to gentle aspiration with the XVAC post-op mode

## PREOPERATIVE SEQUESTRATION FACTORY PROTOCOL

The preoperative sequestration protocols enable the recovery of plasma and platelets from the patient whole blood into bags








Technical claims supported by LivaNova data on file. 1. Bauman, et al, (2015) Evaluation of the minimum volume of salvaged blood required for the successful use of two different autotransfusion device. Ped Anesth. 25:258-264. 2. Overdevest, et al. Clinical evaluation of the Sorin Xtra® autotransfusion system. Perfusion 2012, 27(4) 278–283 3. Seyfried, et al. The impact of bowl size, program setup, and blood hematocrit on the performance of a discontinuous autotransfusion system. Transfusion. 2017 Mar;57(3):589-598



# **XTRA® Intuitiveness**

- Fast and intuitive setup
- Fully automated operation from the start to the end of the case
- Intuitive User Interface with colour touch screen, mimicking the S5® Heart-Lung Machine controls
- **Refined ergonomics** and reduced footprint for manageable procedures



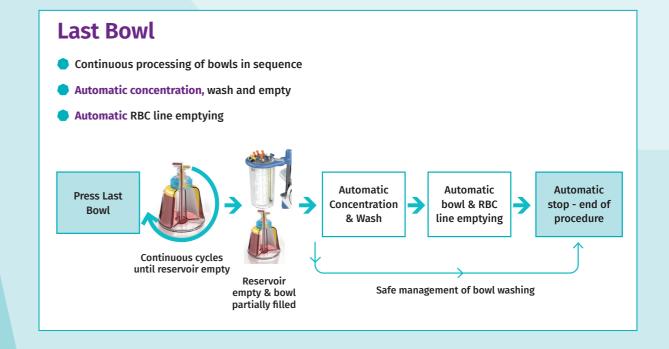

# XTRA® Performance<sup>1</sup>

- Multiple sensors and indicators for enhanced patient safety
- Consistently high RBC hematocrit and wash quality with Popt protocol
- **Excellent** heparin and protein removal
- High RBC recovery rate
- Quiet and powerful vacuum pump

# Popt

# High RBC Hct and wash quality with Popt

The innovative RBC detector technology, combined with the Popt factory protocol and disposable design.

# **Pfat**

# Complete fat removal with the new Pfat

The newly developed Pfat protocol will effectively remove fat particles.

Hct<sup>1</sup> 60-65%

Time<sup>2</sup> ≈5 minutes

Fat Particles Removal<sup>3</sup> > 99%\*

**Hct**<sup>3</sup> ≈50%\*

Heparin Protein Albumin FPH

Removal Rate<sup>2</sup> Heparin Protein Albumin FPH

Removal Rate<sup>3</sup> > 95%\*\*

# **Pstd**

# Fast high volume processing with Pstd

Ready to meet your high volume challenges: fast processing with the Pstd standard protocol, turning into emergency protocol with only one touch.

Hct<sup>4</sup> ≈50%



# Time<sup>4</sup>

- Less than 4 minutes
- Emergency ≈3 minutes

Heparin Protein Albumin FPH

Removal Rate<sup>2</sup> > 92%



1. Overdevest, et al, Clinical evaluation of the Sorin XTRA® autotransfusion system. Perfusion. 2012. 27(4) 278–283. 2. In vitro performance evaluation study with human blood 25% Hct with XTRA® BOWL 225. Data on file at LivaNova Italia. 3. Seyfried TF, Gruber M, Breu A, Aumeier C, Zech N, Hansen E. - Fat removal during cell salvage: an optimized program for a discontinuous autotransfusion device. - Transfusion. 2015 AUG - Epub ahead of print. 4. In-vitro performance evaluation with bovine blood 25% Hct on a modified version of Pstd with 225ml bowl introduced with SW 1.02. Data on file.

<sup>\*</sup> Using 225 ml Bowl, averaging both inlet HCT of 10% and 25%.

<sup>\*\*</sup> Using 225 ml Bowl with inlet HCT of 10% and 25%.

XVAC Technical Information



Xvac is a modular vacuum pump, designed to be extremely quiet and to deliver performance and maximum flexibility by working as a standalone unit or fully integrated into the XTRA® system.

When seated in its housing and connected to the system, XvAC can be activated and operated from a dedicated displet on the XTRA® user interface. When used standalone, the vacuum pump can be controlled from the XvAC panel.

Xvac guarantees flexibility functioning in two operative modes, Intra and Post delivering an optimized solution for perioperative blood recovery. Moreover, Xvac can be activated right after power-on, reacting promptly to critical emergency situations.

The vacuum power ranges from:

- -50 to -300 mmHg (Intra-operative mode High vacuum capacity)
- -10 to -100 mmHg (Post-operative mode Gentle aspiration for wound drainage connection)

XTRA®	
Unit dimensions  * = with cart.	Height = 660 mm (1055 mm*) - pole lowered  Height = 1585 mm (1980 mm*) - pole completely lifted  Height = 835 mm (1230 mm*) - display lifted  Width = 375 mm - (including the side hangers)  Width = 800 mm - with poles completely open  Depth = 500 mm - 680 mm including the front and rear handles
Cart dimensions	Height = 500 mm Width = 480 mm Depth = 595 mm
Unit Weight Cart Weight Display Type Main Voltage (Power Supply) Frequency Fuse Ratings Centrifuge Speed Pump Speed	37 kg (81.4 LBS) 22.5 kg (49.5 LBS) Graphic color LCD TFT 8.4" 172 mm x 130 mm (screen) 230 V~ or 100-120 V~ 50 - 60 Hz 2 x T6.3 H 1500 ÷ 5600 rpm (steps of 100 rpm) 25 - 1000 ml/min (adjustable)

XVAC	
Unit Weight Functioning Range	15 kg (33 lbs) -50 to -300 mmHg (-6.6 kPa to -40 kPa) (steps of 10 mmHg [1.3 kPa]) – intra and pre-operatively -10 to -100 mmHg (-1.3 to -13.3 kPa) (steps of 10 mmHg [1.3 kPa]) – post-operatively

# **XTRA® Disposable Offering**



# **XRES Blood collection reservoir**

The reservoir which sets the standards of blood **collection** to the highest levels

# High capacity and filtration quality

- 4-liter capacity
- Advanced, multi-layer filtration system, with:
  - Internal defoaming polyurethane layer (30 ppi)
  - Intermediate woven, non-woven filter (40 μm)
  - External screen (120 μm)

# **Easy and safe setup**

- New locking mechanism to firmly secure the reservoir to the holder
- 360° reservoir rotation capability within the holder
- Separate holder available for use with IV pole and vacuum regulator

# Clear all-around visibility

- Transparent, flat body to allow constant monitoring of the collected blood
- Transparent, flat lid to allow visibility inside the inner filter

# **XTRA® - Collection & Processing**

# **Broad Flexibility**

- Three 1/4" suction ports, for the collection of blood both intra-operatively and post-operatively: 45° angled, to prevent occlusion from debris produced during surgery
- One 3/8" suction port, for intra-operative procedures where a 3/8" aspiration and anticoagulation line is used
- One filtered and one non-filtered luer lock port, for blood transfer or drugs administration

## **Safety Features**

- Self regulated pressure relief valve
- Safe overflow level valve







# Two configurations available

- XRES T Blood Collection Reservoir
  - Top outlet connection to the bowl
  - Quick reinfusion port for immediate transfusion of non-processed blood in case of extreme emergency
- XRES B Blood Collection Reservoir
  - Bottom outlet connection to the bowl
  - Pre-connected outlet clamp
  - Also Available with 120µm gross filter

# **XTRA® BOWL**

The most complete range of processing bowl sizes to face all operational situations

	Broad Flexibility		
	XTRA® BOWL 55 ml The smallest bowl for minimal bleeding	Minimal Bleeding Orthopedic Surgery Small Size Patients Pre-operative Sequestration (PPP/PRP)	
	XTRA® BowL 125 ml The standard bowl for low bleeding	Orthopedic Surgery (Total Joint Replacement) Obstetric Surgery Pre-Operative Sequestration (PPP/PRP)	
	XTRA® BowL 175 ml The intermediate bowl for medium bleeding	High Bleeding Orthopedic Surgery (Revisions) Low Bleeding Cardiac Surgery (Mini-Bypass) Cardiovascular Surgery	
	XTRA® BowL 225 ml The largest bowl for high bleeding	Cardiovascular Surgery (Bypass, Abdominal Aortic Aneurysm) Emergency & Trauma Transplant	



# **Easy, fast and safe setup**

- Innovative disposable design:
  - XTRA® BowL design for quick 360° snap-in mounting onto the centrifuge plate
  - One-hand mechanism for locking/unlocking the bowl to/from the centrifuge arm
  - Cartridge and tubing design, to ensure straightforward setup
  - Lid-guided tubing positioning into seat when closing the clamp lid
  - Automatic pump loading/unloading at the beginning/end of case

# High quality with the optimized protocol

Optimized protocol (Popt), to achieve high hematocrit, red blood cell recovery rate and waste contaminants removal rate with the XTRA® BOWL 55 or XTRA® BOWL 225



# Fast processing with the standard protocol

Standard protocol (Pstd), to achieve the fastest processing times (comparable to the Baylor Bowl 250 ml) with the XTRA® BOWL 225















# **Collection Set** (TX, TX Cardio, BX or BX Cardio)

Provides XRES reservoir and related items to collect blood recovered from intra-operative field or post-operative drains.

#### Content

- XRES T Blood Collection Reservoir (or XRES B Blood Collection Reservoir)
- AAL Aspiration and Anti-coagulation Line
- VEL Vacuum Extension Line
- Cardio Kit (only in Cardio configuration)

#### **Advantages**

- Modular solution where each item is packed and sterilized separately, allowing a cost effective stand-by strategy: collect first and process later
- Separate holder available to use XRES on IV pole and with vacuum regulator
- Available in standard and Cardio configurations (with Cardio Kit)

#### **Indications**

- Standard configuration: orthopedic surgery, spinal surgery, other non-cardiac applications (e.g. cardiovascular, obstetrics, urology)
- Cardio configuration: cardiac applications

# **Procedure Set** (TX Cardio or BX) (55, 125, 175 or 225)

Provides XRES reservoir, XTRA® BOWL and all the necessary components to collect and process the blood recovered from the intra-operative field or post-operative drains.

#### Content

- Collection Set (TX Cardio or BX)
- Bowl Set X (55, 125, 175 or 225)

# **Advantages**

- All-in-one solution for blood collection and processing
- Suitable for all surgical conditions with 4-liter reservoir and 4 bowl sizes
- Integrated solution to connect the oxygenator to the XRES reservoir with Cardio Kit (only available in Procedure Set TX)

#### **Indications**

- Cardiac surgery
- Abdominal/aortic aneurysm
- Emergency and trauma
- Transplant



# Bowl Set X (55, 125, 175 or 225)

Provides XTRA® BOWL and related items to process the blood recovered from the intra-operative field and post-operative drains or separate hemocomponents in pre-operative sequestration procedures.

#### Content

- XTRA® BowL with preconnected color-coded tubing and cartridge
- Pre-connected BRB1 Blood Reinfusion Bag (1 liter)
- Waste Bag X (10 liters)

#### **Advantages**

- Flexibility with 4 bowl sizes suitable for minimal, small, medium and high bleeding
- New bowl, tubing and cartridge design for easy, fast and safe setup

## **Indications**

- Intra-operative and postoperative processing
- Pre-operative sequestration



# **Cardiovascular Surgery**

#### **Cardio Kit**

Includes all the adaptors, components and lines to connect the oxygenator to the autotransfusion system to recover and process the blood during and post bypass.



#### **Tandem Reservoir "Y"**

Allows the connection of two XRES reservoirs to the XTRA  $^{\otimes}$  system in procedures where large volumes of blood need to be recovered and processed.



# **Orthopedic Surgery**

# **Fluid Collection Bag for Orthopedics**

Designed to collect the blood lost during orthopedic operations, such as hip replacement/revision, and transfer it to the XRES reservoir through a preconnected aspiration and anticoagulation line. The 45 cm long adhesive strip suits any kind of wound size.



#### 4-Way Adapters\*

Connect patient drain tubes of various diameters to the aspiration & anticoagulation line during post-operative blood collection.

Available with luer-locks or with multidiameter adapters.



# **Pre-operative Sequestration**

# **Sequestration Set X**

Intended for pre-operative sequestration (PPP and PRP) with transfer bag technique. To be used in combination with a Bowl Set X.



# **Miscellaneous**

## **AAL Aspiration and Anticoagulation Line**

Allows aspiration and anticoagulation of the blood coming from the operative site, collecting it into the XRES reservoir. A double woven non-woven layer protects the sterility when passing the line into the sterile field. Various diameters available: 1/4", 1/4" – 3/8", 3/8".



#### **BRB1 Blood Reinfusion Bag**

Designed to collect 1 liter of concentrated RBCs during blood salvage procedures.



## **Waste Bag X**

Used in connection with the Bowl Set X, it collects up to 10 liters of waste fluids during processing.



#### **Goccia Filters\***

Designed to remove microaggregates and protect the patient pulmonary micro-circulation.



<sup>\*</sup>not available in US and Japan.

# **XTRA® Clinical Applications**







# **Cardiac Surgery**

#### **Interventions**

- Concentration of residual extra-corporeal circulation volume during/after bypass
- Mini Bypass
- Off-Pump
- Valve Replacement
- Surgical Repair of Great Vessels
- Suction Blood Washing

## What you need

- Procedure Set or Collection
   Set (TX Cardio or BX Cardio) +
   Bowl Set X
- 20/40µm Microaggregate Goccia Filter\*

\*not for US and Japan

## **XTRA® Advantages**

- S5® like touch screen user interface, ensuring a straigthforward learning curve for all operators already familiar with LivaNova's heart-lung machine
- Functional integration with S5® through LivaNova CONNECT™ perfusion data management
- High quality or fast processing by simply selecting the appropriate protocol, either the optimized protocol (Popt) or the standard protocol (Pstd)
- Cardio Kit, for direct access to the oxygenator during and after bypass
- Broad spectrum of bowl sizes, to address different levels of bleeding

# **High Bleeding Surgery**

## **Interventions**

- Cardiovascular Surgery
- Organ Transplant
- Trauma Surgery
- Obstetric Surgery

# What you need

- Procedure Set or Collection Set (TX or BX) + Bowl Set X
- 20/40µm Microaggregate Goccia Filter\*
- Additional Components:
  - Tandem Reservoir "Y"
- BRB1 Blood Reinfusion Bag
- Waste Bag X

\*not for US and Japan

# **XTRA® Advantages**

- Live on-screen indication of critical data: volume and hematocrit of the fluid collected from the field, as well as of the red blood cells recovered after processing
- Powerful and silent blood aspiration with the integrated XVAC vacuum pump
- Immediate aspiration, independent from the XTRA® system boot-up time, by powering XVAC on from the control panel
- Fast processing with the standard protocol (Pstd)
- Dedicated Emergency button available in all screens to face critical situations
- Bowl Set X/225, to meet high volume challenges

# **Orthopedic Surgery**

#### **Interventions:**

- Primary Hip and Knee Replacement
- Hip and Knee Revision
- Spine Surgery

#### What you need:

- Procedure Set or Collection Set (TX or BX) + Bowl Set X
- 20/40µm Microaggregate Goccia Filter\*
- Additional Components:
  - Intra-operatively: Fluid Collection Bag for Orthopedic
  - Post-operatively: 4-Way
     Adapter\* or Wound Drainage
     "Y" Connector

\*not for US and Japan

## **XTRA® Advantages**

- Option to mount the XRES reservoir on an IV pole by means of the separate holder, and connect it to the XVAC vacuum pump used in stand-alone mode, to easily move between ICU beds when collecting blood from post-operative wound drains
- Reduced footprint, to allow processing of the blood collected post-operatively from wound drains also in the narrow spaces of the ICU
- Dedicated post-operative protocol (Post-Op), assuring the same high quality setting of Popt protocol and turning the XVAc into a gentle mode to be safely connected to wound drains
- Dedicated fat protocol (PFat) assuring complete removal of lipid particles
- Modular disposable solutions, to allow collection first and process when enough blood has been shed
- Small to intermediate bowl sizes, to face minimal bleeding orthopedic surgery as well as joint replacements and revisions

# **Pre-operative Sequestration**

#### **Interventions:**

 All cases where bleeding may occur during the post-operative course

# What you need:

- Bowl Set X
- 20/40µm Microaggregate Goccia Filter\*
- Additional Components:
  - Sequestration Set X

\*not for US and Japan

# **XTRA® Advantages**

- Full on-screen description of the actions to be performed, to guide the operator throughout the entire procedure
- Broad spectrum of pre-operative sequestration protocols:
  - PPP (for collection of platelet poor plasma in a single bag)
  - PRP1 (for collection of both platelets and plasma in a single bag)
- PRP2 (for collection of platelet poor plasma in one bag and platelet rich plasma in a separate bag)
- Easy and quick conversion from pre-operative sequestration to intra-operative collection and processing by using the same Bowl Set X

Order Guide		
Code	Description	Quantity / Box
75220	XTRA® Equipment 230V 50Hz Version	1
75221	XTRA® Equipment 110V 50Hz Version	1
75306	Xvac Vacuum Pump 220V Version	1
75307	Xvac Vacuum Pump 110V Version	1
65151	Thermal Printer Paper Roll Kit	4
65696	Centrifuge Well Fluid Container	1
65666	Vinyl Cover For XTRA®	1
65714	Xvac Trap	1
63056	XTRA® USB Memory Stick	1
	75220 75221 75306 75307 65151 65696 65666 65714	75220 XTRA® Equipment 230V 50Hz Version 75221 XTRA® Equipment 110V 50Hz Version 75306 XVAC Vacuum Pump 220V Version 75307 XVAC Vacuum Pump 110V Version 65151 Thermal Printer Paper Roll Kit 65696 Centrifuge Well Fluid Container 65666 Vinyl Cover For XTRA® 65714 XVAC Trap

#### **Disposables, Miscellaneous Processing Components and Adapters**

Туре	Item	Description	Quantity / Box
	04254	Procedure Set Tx/55	3
	04255	Procedure Set Tx/125	3
	04256	Procedure Set Tx/175	3
B 1 6 .	04257	Procedure Set Tx/225	3
Procedure Sets	04261	Procedure Set Bx/55	3
	04262	Procedure Set Bx/125	3
	04263	Procedure Set Bx/175	3
	04264	Procedure Set Bx/225	3
	04259	XRES B Blood Collection Reservoir	6
	04260	Collection Set Tx	6
	04266	Collection Set Tx Cardio	6
	04265	Collection Set Bx	6
	04267	Collection Set Bx Cardio	6
	04268	BRB1 Blood Reinfusion Bag X, 1 Liter	50
	04272	XRES Blood Collection Reservoir Holder	1
	04250	Bowl Set X/55	6
B. 16.	04251	Bowl Set X/125	6
Bowl Sets	04252	Bowl Set X/175	6
	04253	Bowl Set X/225	6
Sequestration Sets	04015	Sequestration Set X	40
DI 16 1' 18' 5 0 1'	04270	Reservoir Outlet Clamp XRES B	12
Blood Sampling Kits For Quality	04271	Reservoir Outlet "Y" XRES B	12
Assurance	007016000	Blood access sampling adapter	25
	04128*	4-Way Multidiameter Adapter	20
W 15 1 . W	04059*	4-Way Adapter with Luer Lock	20
Wound Drainage Kits	007115000	Wound Drainage "Y" Connector	25
	007116000	Wound Drainage "Y" Connector with Dual Lumen Suction Lir	ne 10
	04273	XTRA® AAL Aspiration and Anticoagulation Line 1/4"	10
Suction Assemblies	04196	AAL Aspiration and Anticoagulation Line 1/4" - 3/8"	10
	04197	AAL Aspiration and Anticoagulation Line 3/8"	15
	04269	Waste Bag X	10
Miscellaneous Processing Components	04133	Cardio Kit	60
& Adapters	04028	VEL Vacuum Extension Line	50
	04129	Bag Adapter	80
	04152	Fluid Collection Bag For Orthopedics	12
	04058	Tandem Reservoir "Y"	20
	09085	40Um Goccia Filter	12
Minne and the file of	09086	20Um Goccia Filter	12
Microaggregate Filters*	09087	20Um Goccia Filter with Infusion Line	6
	09088	40Um Goccia Filter with Infusion Line	6
*Not available in US and Japan			

<sup>\*</sup>Not available in US and Japan.

Please always refer to the Instructions For Use (IFU) manual provided with each product for detailed information, warnings, precautions and possible adverse side effects. Not all products available in all countries, please consult local label.

The LivaNova Deutschland Quality System complies with: EN ISO 13485:2012

The Sorin Group Italia Quality System complies with: EN ISO 13485:2012



#### **Manufacturer:**

Sorin Group Italia S.r.l. a wholly-owned subsidiary of LivaNova PLC Via Statale 12 Nord, 86 I-41037 Mirandola (MO) Italia Tel.: +39.0535.29811 info.cardiacsurgery@livanova.com

#### **Manufacturer:**

LivaNova Deutschland GmbH Lindbergstrasse 25 D-80939 München Germany Tel: +49.(0)89.32301.0 Fax: +49.(0)89.32301.555

#### www.livanova.com







# Connect<sup>™</sup> Get connected to optimal data management practices



The first innovative and intuitive perfusion data management system designed to improve clinical efficiency and enable Goal-Directed Perfusion Therapy

# Connect to clinical efficiency with greater confidence

#### Minimize

Transcription errors and bias.1

#### Restrict

Inefficiencies of manually entering product traceability data.

#### **Decrease**

Limitations of analyzing manually recorded data.

#### Enable

Application of GDP, which aims to reduce occurrence of Acute Kidney Injury.<sup>2, 3, 4, 6, 7, 8, 9</sup>

#### Connect<sup>™</sup>

Allows trending while centralizing all patient data on one screen.

#### Connect

Permits automatic transfer of information from LivaNova disposables and creation of electronic patient records.

#### Connect

Provides customizable online quality indicators and post-op electronic quality reports.

#### Connect

Enables Goal-Directed Perfusion (GDP)
Therapy through monitoring of critical metabolic patient parameters with GDP Monitor®.

# Connect

is LivaNova's innovative and intuitive perfusion data management system designed by perfusionists, for perfusionists.

The Connect System consists of two core components:



#### The **Connect Manager**<sup>®</sup>:

- Manages all case data in one central SQL database
- Provides retrospective data analysis with included statistics tool
- Generates and exports
   Perfusion Case Reports
- Allows full customization of Connect Recorder according to preferences




#### The Connect Recorder®:

- Collects and visualizes data from the HLM and other external devices
- Offers a high level of customization to optimize viewing preferences
- Offers quick single-touch event entries at any time
- Displays Goal Directed Perfusion parameters via GDP Monitor

# Improved clinical practice

The **Connect** workflow system minimizes transcription errors, bias and all the drawbacks associated with manual operations.<sup>1</sup> Connect allows trending and electronic transfer of data from LivaNova disposables.

The perfusionist accesses all perfusion data on one screen allowing more time to concentrate on the patient and circuit facilitating optimal patient management. All data is then exported back to the Manager database where the clinician may consult case per case for statistical and inventory analysis, generate and export or print complete electronic medical records.

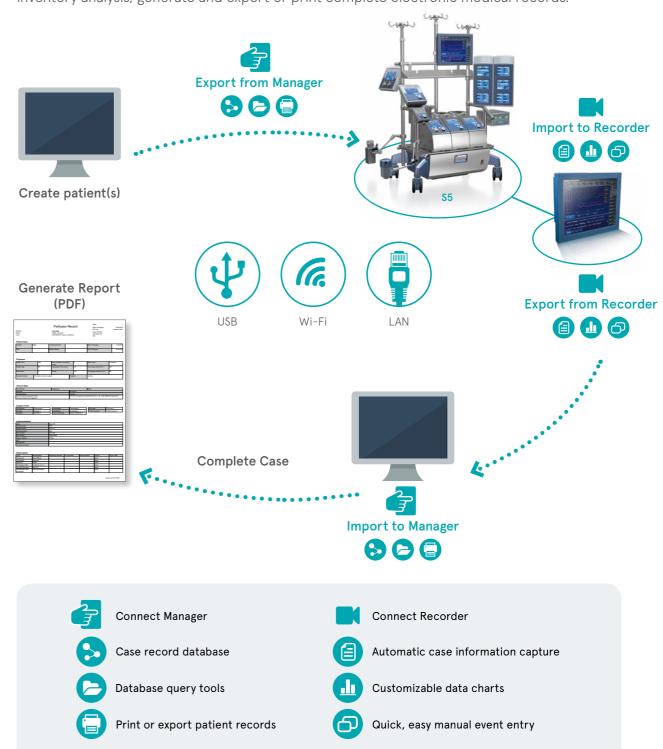


# All the information you need on one screen

#### Easy, intuitive and complete Graphical User Interface (GUI).

During the operation, the perfusionist can view, in near real-time, data and patient parameters in the form of graphs or charts according to personal preference. The perfusionist may also enter any data as well as comments and event entries in order to have complete documentation during the case.

The Connect System may also be configured to collect data electronically from a variety of patient monitors, blood gas devices, ACT meters, cerebral oximetry devices, etc.

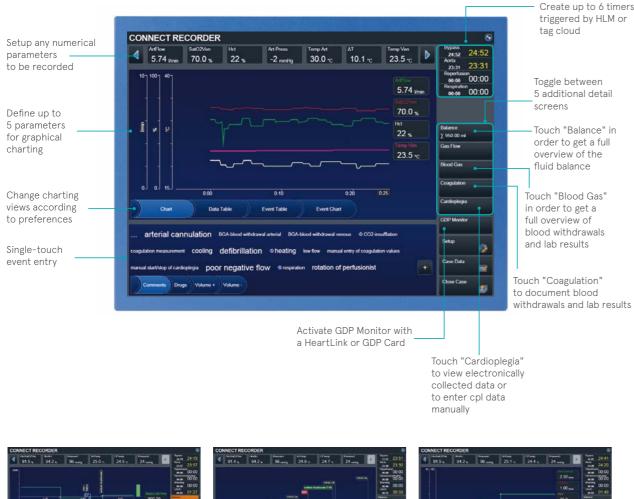



CONNECT RECORDER

| Section | Sectio



Fluid balance overview screen

Events shown as chart

Gas flow chart






The new, powerful, optionally available **HL7 interface** is an integrated, bidirectional communication system between **Connect** and the **Electronic Medical Record** (EMR). It allows the perfusionist to retrieve and share patient information from and to an EMR system to **simplify workflow** and **improve clinical practice**.

#### Main clinical benefits of Connect HL7:

- · Simplification of the clinical data workflow
- Improved data integrity
- Enhanced legibility
- Reduction in manual processes

#### Main features of Connect HL7:

- New graphical user interface with a powerful HL7 search engine to search for patient data in the EMR system and seamlessly import it into either Connect Manager or Connect Recorder
- Automatic upload of the post-operative PDF patient record into the EMR system
- Post-operative export of recorded patient data during Extra Corporeal Circulation (ECC) directly into the graphical user interface of the EMR system
- Full customization options to reflect hospital specific EMR and emergency workflows

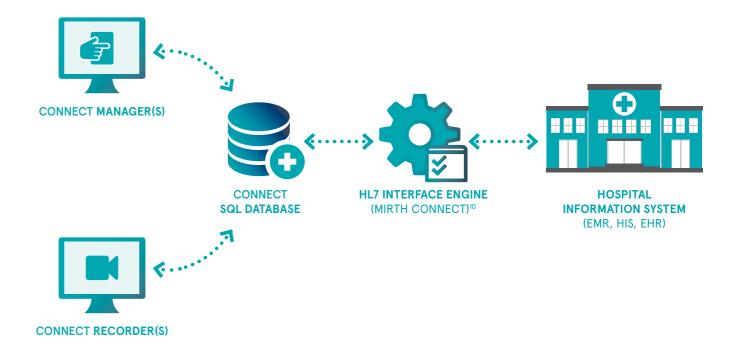



## **Implement Goal-Directed Perfusion Therapy** with the optional GDP Monitor feature

Goal-Directed Perfusion is a perfusion therapy aimed at reducing the occurrence of Acute Kidney Injury (AKI), shortening ICU and hospital length of stay, and potentially decreasing Red Blood Cell (RBC) transfusions by respecting the metabolic needs of each patient during cardiac procedures.

#### 5 GUIDING RULES TO IMPLEMENT GOAL-DIRECTED PERFUSION 2, 3, 4, 6, 7, 8, 9

- Limit hemodilution on CPB (Hct management)\*
- Oxygen Delivery index DO2i to be kept > 270 ml / min / m2
- Increase the DO<sub>2</sub> by acting on pump flow, PaO<sub>2</sub>
- Oxygen Delivery to Carbon Dioxide production radio (DO2i / VCO2i), to be kept >5
- Transfuse RBC based on SvO<sub>2</sub> and O<sub>2</sub>ER\*\* rather than HCT

LivaNova, together with leading clinicians that have studied the clinical benefits and improved patient outcomes associated with Goal-Directed Perfusion, is at the forefront of creating global awareness of the advantages of this therapy. Furthermore, LivaNova implements and transparently provides the GDP formulas patented by Dr Marco Ranucci.

With the **GDP Monitor** the perfusionist may view advanced parameters such as VCO<sub>3</sub>i, O<sub>2</sub>ER and the metabolic ratio DO<sub>2</sub>i/VCO<sub>2</sub>i. Such parameters are relevant for optimal perfusion management where the metabolic needs of each patient during cardiac procedures is effectively respected.<sup>2, 3, 4, 6, 7, 8, 9</sup>



<sup>\* -1%</sup> point of Nadir Hct → +7% AKI (Ranucci et al., "Acute Kidney Injury and Hemodilution During Cardiopulmonary Bypass: A changing Scenario"; Ann Thoracic Surg. 2015 Jul;100(1):95-100

# Heartlink<sup>®</sup> System

The first integrated **Perfusion Management System** designed to **help clinicians to improve** patient outcomes, increase clinical efficacy and apply Goal-Directed Perfusion therapy.

#### **IMPROVING CLINICAL DATA ACCURACY**

CONNECT

"The use of an automated system provides the opportunity to minimize transcription errors and bias"1

- LivaNova disposable traceability · fewer transcription errors
- limited manual operations

**BENEFITS INCLUDE:** 



#### **REDUCING AKI & BLOOD TRANSFUSIONS**

"The AKI rate started declining in our institution the year GDP was introduced. This suggests that GDP may actually be beneficial regarding renal protection"11







#### VALIDATED **CAPNOGRAPH**

Unique capnograph validated with INSPIRE.\*



**HEARTLINK CARD** 

#### **FOCUSING ON NEUROLOGICAL PROTECTION**

**REDUCING** 

**AKI & BLOOD TRANSFUSIONS** 

"It is of note that with the use of ultra low

prime oxygenators, GDP actually exerted

his potential"11

"The new PFAT protocol featured in Xtra significantly increases fat elimination, yielding results comparable with continuous processing technology" 12

#### PROVEN SAFE, FLEXIBLE AND MODULAR

"I am using the S5 in various configurations according to the different weight of my patients. This helps me to achieve an optimum relation between the priming and blood volume of the patient. The flexible mast mounted pumps allow a very close positioning of the whole system to the patient"

> Frank Münch, Chief perfusionist, University hospital Erlangen, Germany

<sup>\*\*</sup> VO2i / DO2i: fraction of DO2 that diffuses from capillaries into tissues: goal <35-39% (VO2= Oxygen Consumption)

<sup>\*</sup> Refer to LivaNova for more information

#### References:

- The future of the perfusion record: Automated data collection vs. manual recording. Ottens J et al., JECT 2005;37:355-359J Extra Corpor Technol. 2005 Dec;37(4):355-9.
- 2. O<sub>2</sub> delivery and CO<sub>2</sub> production during cardiopulmonary bypass as determinants of acute kidney injury: Time for a Goal-Directed Perfusion
  - De Somer F, Mulholland JW, Bryan MR, Aloisio T, Van Nooten GJ, Ranucci M, Crit Care, 2011 Aug 10;15(4):R192
- 3. Oxygen delivery during cardiopulmonary bypass and acute renal failure after coronary operations.
  Ranucci M, Romitti F, Isgró G, Cotza M, Brozzi S, Boncilli A, Ditta A; Ann Thorac Surg. 2005 Dec;80(6):2213-20
- Anaerobic metabolism during cardiopulmonary bypass: Predictive value of carbon dioxide derived parameters. Ranucci M, Isgró G, Romitti F, Mele S, Biagioli B, Giomarelli P, Ann Thorac Surg. 2006 Jun;81(6):2189-95
- 5. Transfusions during cardiopulmonary bypass: Better when triggered by venous oxygen saturation and oxygen extraction rate. Ranucci M, Castelvecchio S, Ditta A, Brozzi S, Boncilli A, Baryshnikova E Perfusion. 2011 Jul;26(4):327-33
- Outcome with high blood lactate levels during cardiopulmonary bypass in adult cardiac operation.
   Demers P, Elkouri S, Martineau R, Couturier A, Cartier R. Department of Surgery, Montreal Heart Institute, Quebec, Canada
- 7. Frequency, risk factors, and outcome of hyperlactatemia after cardiac surgery.

  Maillet JM, Le Besnerais P, Cantoni M, Nataf P, Ruffenach A, Lessana A, Brodaty D. Cardiovascular and Thoracic Surgery Intensive Care Unit,
  Centre Cardiologique du Nord, Saint-Denis, France
- 8. Anaerobic metabolism during cardiopulmonary bypass: predictive value of carbon dioxide derived parameters.
  Ranucci M, Isgrò G, Romitti F, Mele S, Biagioli B, Giomarelli P. Department of Cardiothoracic Anesthesia, Policlinico San Donato, Milan, Italy
- 9. Hyperlactatemia during cardiopulmonary bypass: determinants and impact on postoperative outcome.
  Ranucci M, De Toffol B, Isgrò G, Romitti F, Conti D, Vicentini M. Department of Cardiovascular Anesthesia and Intensive Care, IRCCS Policlinico S, Donato, Via Morandi 30, 20097 San Donato Milanese, Milan, Italy
- 10. https://www.mirth.com/
- 11. Acute kidney injury and hemodilution during cardiopulmonary bypass: a changing scenario.

  Ranucci M, MD, FESC, Aloisio T, MD, Carboni G, CCP, Ballotta A, MD, FESC, Pistuddi V, Menicanti L, MD, and Frigiola A, MD; Surgical and Clinical Outcome REsearch (SCORE) Group. Departments of Cardiothoracic and Vascular Anesthesia and Intensive Care and Department of Cardiac Surgery, IRCCS Policlinico San Donato, Milan, Italy
- 12. The impact of bowl size, program setup, and blood hematocrit on the performance of a discontinuous autotransfusion system. Seyfried T F et al., doi:10.1111/trf.13954; Transfusion 2017

Order Guide				
ITEM CODE	IDENTIFICATION	DESCRIPTION	QUANTITY / BOX	
24-90-80	Connect Recorder	for S5	1	
24-90-81	Connect Recorder	for S3	1	
24-90-45	Connect Manager		1	

Additional packages for upgrades from DMS are available, please contact your local Representative for more details.

ITEM CODE	IDENTIFICATION
24-11-10	Connect HL7 Interface Package
24-11-20	Connect HL7 Datapoints
24-11-50	Connect HL7 1 Year Extension
24-11-60	Connect HL7 2 Years Extension
24-11-70	Connect HL7 3 Years Extension
24-11-80	Connect HL7 5 Years Extension
24-11-30	Additional Customization and Services (10h)
24-11-40	Additional Customization and Services (20h)

#### **SPECIFICATIONS:**

#### **Connect Manager**

Operating system: Microsoft® Windows® XP service pack 3 / Microsoft® Windows® 7 / Windows 10 Enterprise LTSC 2018 64-bit

.NET used: 3.5 SP1

Database: Microsoft® SQL Server 2017.

#### **DataPad for Connect Recorder**

Operating system: Windows 10 Enterprise LTSC 2018 64-bit

CPU: Intel® Celeron® 2002E 1.5GHz

RAM: 4GB DDR3L 1600 1x COM Port RS232 4x USB Port (2.0, EHCI)

1x DVI Port

1x IEEE 802.3u 100 Base-Tx Fast Ethernet compatible port

HDD: 64GB SSD

Removable HDD: 16GB CFAST

Database: Microsoft® SQL Express 2017

15" Resistive touch screen

#### **WLAN Module Specifications**

Frequency Range: 2.4 GHz to 5 GHz

Wireless network standard: IEEE 802.11a/b/g/n



#### www.livanova.com



The LivaNova Deutschland Quality System complies with: EN ISO 13485:2012



Manufacturer:

LivaNova Deutschland GmbH

Lindbergstrasse 25 D-80939 München Germany Tel: +49.(0)89.32301.0

#### Sorin Group Italia Srl

A wholly-owned subsidiary of LivaNova PLC Via Statale 12 Nord, 86 - 41037 Mirandola (MO) Italy Tel: +39 0535 29811 - Fax: +39 0535 25229 info.cardiacsurgery@livanova.com LivaNova USA, Inc.

14401 West 65th Way Arvada CO 80004, USA Tel: +1-800-221-7943