



Company: CHONGQING NEW WORLD TRADING CO., LTD

Address: Room 1001, Unit 2, No. 88, Jianxin East Road,
Jiangbei District, Chongqing, China

Website: www.cnwtc.com

Tel: +86-23-67728212, +86-23-67728441

Mobile/Whatsapp: +8613677626206

Fax: +86-23-67728109

Email: coco@cnwtc.com




重庆纽沃贸易有限公司
CHONGQING NEW WORLD TRADING CO., LTD.



Introduction to glass properties

The glass instruments produced by our factory are made of different performance glass according to the different technical requirements of the products, and their physical and chemical properties are described below.
GG17 High Temperature Glass (High Borosilicate 3.3 Glass)
GG17 glass (High Borosilicate 3.3 Glass) is a low alkali high borosilicate glass, does not contain calcium, magnesium, zinc and lead elements, has good physical and chemical properties, used in the manufacture of heat-resistant glass instruments.
It is used to make heat-resistant glass instruments and other demanding utensils and various precision instruments for lamp workers.
The physical and chemical properties are as follows.

Silicon content 80%	Coefficient of linear thermal expansion 20 - 300°C 3.3 x 10 ⁻⁶ (-7)
Strain temperature 520°C	Thermal shock resistance (glass rod method) 300°C
Annealing temperature 560°C	Water resistant Grade 1
Softening temperature 820°C	Material: High Borosilicate 3.3 Glass

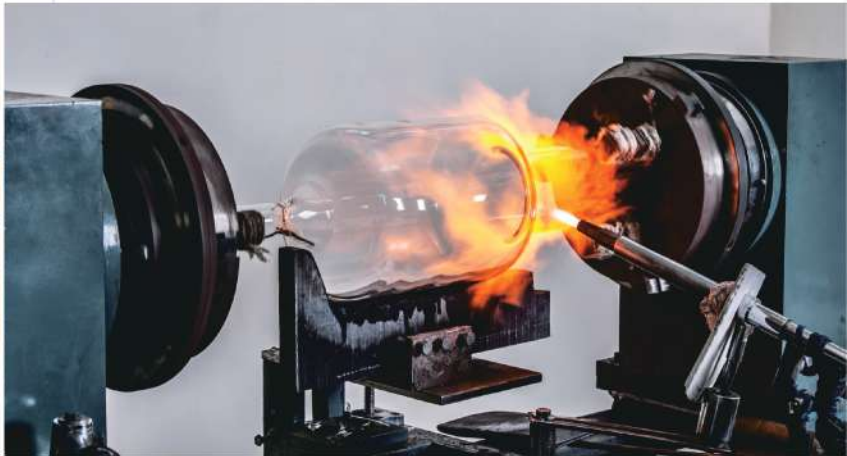

Glass measuring instruments

DescriptionThe general purpose glass measuring instruments produced by our factory for laboratory use: measuring cups, measuring janes, is bottles, burettes, pipettes and indexing pipettes, all conform to the national standards GB12803-GB12808. Their capacity calibration and usage should refer to GB/T12810 national standard. In order to ensure the correct measurement, all of our measuring instruments are tested in accordance with the JJG196 common glass measuring instrument calibration regulations. The main technical data of the glass measuring instruments are described as follows:

1 Accuracy level
Glass measuring apparatus, measuring bottle, burette, pipette and indexing pipette, according to the customer volume accuracy is divided into two kinds of A and B. B level of capacity tolerance for A level double. On the indexing side, they are marked with the class code "A" or "B". Measuring cups and measuring jars are not graded O

2 mark glass measures in millilitres, marked with the symbol 'ml', which is equivalent to 'cm³'. Management of graduated suction
The standard temperature for quantification is "20°C" and should be kept at room temperature of 20°C when in use.

Measuring instruments for outgoing measurements are indicated by "Ex", e.g. Burettes, pipettes, graduated pipettes, measuring cups, measuring jars.

Measuring instruments for incoming measurements are denoted by "in", e.g. Measuring flasks, stoppered measuring cylinders, measuring cylinders. On glass measuring vessels with frosted pistons and glass stoppers, the stopper and the vessel are marked with the same number so that they can be matched by number to avoid leakage. A standard frosted interface measure

Frosted mouths, stoppers may not be marked with a number.

3 Colouring marking

For quick identification of pipettes and graduated pipettes of different sizes and capacities, in accordance with the international standard ISO 13485 and the provisions of the standard GB 962 suction tube colour marking on the handle part of the above-mentioned straws, printed with different colour ring markings in order to distinguish

4 Flow time

Due to the influence of surface adhesion, the wave body through the measure, its inner wall will adhere to a thin layer of liquid, the volume of the layer of liquid and the liquid outflow time, usually the shorter the outflow time, the more the residual wave body, and vice versa, the less. However, the outflow time is too long, affecting the efficiency of the work, so in the A-class measuring device, there is a waiting time specified in order to improve the accuracy. The current glass measuring device water flow out time and waiting time, specified in the product specification and Table 1. 2. 3. 5 Volume of all allowable deviation
Glass measuring device according to the product specifications, there are different allowable deviation of the volume, single mark the allowable deviation for the absolute tolerance, and multiple divisions of the tolerance of the gauge is based on the full capacity of the tolerance, for some divisions of the capacity, the relative tolerance value should be given sufficient attention in order to choose the appropriate species specifications. Gauge allowable deviation values, listed in the product specification and Tables 1-6

6 glass 95 reading

The adjustment of the liquid level of the glass measuring instrument should be in accordance with the international standard ISO13485 and the national standard GB/T12810 "calibration and use of glass measuring instruments", reproduced below:
Adjustment of the curved liquid level
The curved liquid level is the interface between the wave body and the air of the volume to be measured.
Most gauges use the principle of setting and reading the curved level against a reference line or index line.
The curved wavefront should be set so that the lowest point of the curved liquid surface is tangent to the level of the edge of the index line and the sight line is at the same level as the edge of the index line, however the mercury curved liquid surface should be tangent to the level of the lower edge of the index line at its highest point. When opaque liquids are used, the horizontal line of sight should pass through the upper edge of the curved liquid surface and be properly calibrated if necessary.
A proper arrangement of light allows the curved liquid surface to be dark and well defined. For this purpose, a white background should be used and any unwanted stray light should be removed. For example, a strip of black paper or a small piece of thick black tape cut into the wall of the gauge can be placed no more than 1 mm below the gauge's positioning level.
When the index line is long enough to be viewed from both the front and rear of the gauge, the line of sight should be at a point where the front and rear of the upper edge partially coincide to avoid parallax. When the gauge has an indexing line only at the front, parallax is negligible when the edge of the indexing line is set with a black masking tape. However, it should be noted that the eye should be read at the same level as the edge of the indexing line.



Laboratory Glasswares

1-31



Microscope Slide & Cover Glass

32-34




Lab Porcelain Products

35-36




Understanding the Markings of Volumetric Glassware


Burettes

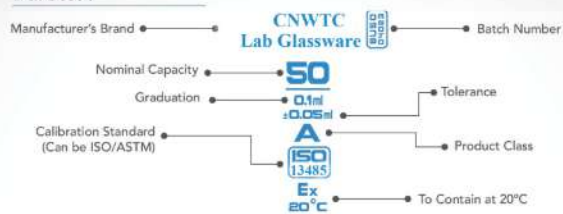

Cylinders

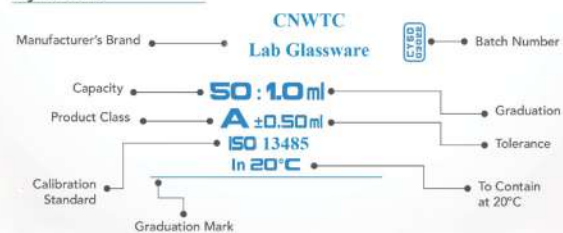

Volumetric Flasks (ISO)

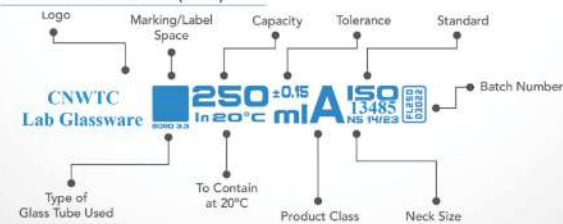

Glass Beaker, Low Form, with Spout, with Printed Graduation				
ITEM CODE	CAPACITY (ML)	O.D.(MM)	HEIGHT(MM)	
1101	5	22	30	
1101	10	26	35	
1101	25	34	50	
1101	50	42	60	
1101	100	50	70	
1101	150	60	80	
1101	200	65	90	
1101	250	70	95	
1101	300	77	106	
1101	400	80	110	
1101	500	85	120	
1101	600	90	125	
1101	800	100	135	
1101	1000	105	145	
1101	2000	130	185	
1101	3000	150	210	
1101	5000	170	270	
1101	10000	217	350	

Glass Beaker, Tall Form, with Spout, with Printed Graduation				
ITEM CODE	CAPACITY (ML)	O.D.(MM)	HEIGHT(MM)	
1102	25	30	55	
1102	50	38	70	
1102	100	48	80	
1102	150	54	95	
1102	250	60	120	
1102	400	70	138	
1102	500	75	140	
1102	600	80	150	
1102	800	90	175	
1102	1000	95	185	
1102	2000	120	240	
1102	3000	135	280	

Beaker, Conical (Philips), With Spout				
ITEM CODE	Capacity(ml)	O.D. at top(mm)	O.D. at base(mm)	Height(mm)
1103	125	34	55	110
1103	250	43	70	138
1103	500	53	88	156

Boiling Flask Flat Bottom, Narrow Neck with Bead Rim				
ITEM CODE	CAPACITY (ML)	O.D. of Neck (MM)	O.D. of Bulb (MM)	HEIGHT(MM)
1111	5	13	27	62
1111	10	13	33	68
1111	25	18	42	80
1111	50	22	51	109
1111	100	22	64	110
1111	150	22	74	140
1111	200	23	85	140
1111	250	34	85	140
1111	300	29	95	170
1111	500	34	105	170
1111	1000	42	131	200
1111	2000	50	166	250
1111	3000	50	199	370
1111	5000	55	235	400
1111	10000	65	279	420
1111	15000	70	330	500
1111	20000	78	370	620

Boiling flask, Round bottom, Narrow neck, with beaded rim				
ITEM CODE	Capacity(ml)	O.D. at neck(mm)	O.D. at bulb(mm)	Height(mm)
1115	5	13	27	62
1115	10	13	33	68
1115	25	18	42	80
1115	50	22	51	105
1115	100	22	64	115
1115	150	22	74	147
1115	200	23	85	147
1115	250	34	85	147
1115	300	29	95	175
1115	500	34	105	175
1115	1000	42	131	210
1115	2000	50	166	260
1115	3000	50	199	370
1115	5000	55	235	400
1115	10000	65	279	420
1115	15000	70	330	500
1115	20000	80	345	500

Boiling flask, Round bottom with thick and short neck				
ITEM CODE	Capacity(ml)	O.D. at neck(mm)	O.D. at bulb(mm)	Height(mm)
1117	250	86	30	120
1117	500	110	40	160
1117	1000	140	45	200
1117	2000	175	50	250

Nitrogen flask (Kjeldahl) Flask				
ITEM CODE	Capacity(ml)	O.D. at neck(mm)	O.D. at bulb(mm)	Height(mm)
1118	22	49	49	200
1118	34	60	60	200
1118	34	81	81	270
1118	34	101	101	300
1118	34	126	126	350

Conical flask, (Erlenmeyer) flask, Wide neck, with graduation				
ITEM CODE	Capacity(ml)	O.D. at neck(mm)	O.D. at bulb(mm)	Height(mm)
1120	25	32	42	79
1120	50	34	51	85
1120	100	34	64	105
1120	200	50	79	131
1120	250	50	85	140
1120	300	50	87	156
1120	500	50	105	175
1120	1000	50	131	220
1120	2000	72	153	280
1120	3000	106	190	285

Conical flask (Erlenmeyer flask), narrow neck, with graduation

ITEM CODE	CAPACITY (ML)	O.D. of Neck (MM)	O.D. of Bulb (MM)	HEIGHT (MM)
1121	5	14	25	50
1121	10	16	30	55
1121	25	22	42	75
1121	50	22	51	90
1121	100	22	64	105
1121	150	28	71	120
1121	200	34	79	135
1121	250	34	85	145
1121	300	34	87	160
1121	500	34	105	180
1121	1000	42	131	220
1121	2000	50	166	280
1121	3000	50	187	310
1121	5000	50	220	365
1121	10000	76	295	435

Conical flask, With glass ground stopper

ITEM CODE	Capacity(ml)	O.D. of body(mm)	Height(mm)
1122	90	50	90
1122	100	60	108
1122	250	83	140
1122	500	98	185
1122	1000	130	230

Iodine flask, Wide spout with standard ground stopper

ITEM CODE	Capacity(ml)	O.D. of Body(mm)	O.D. at base(mm)	Height(mm)
1123	100	60	55	114
1123	250	83	78	155
1123	500	98	88	200

Distilling flask (Fractionating flask, Seybolt), arm sealed at the bottom third part of neck

ITEM CODE	Capacity (ml)	O.D. of neck (mm)	O.D. of bulb (mm)	Height (mm)	H(mm)	L(mm)	O.D. of neck (mm)
1131	25	22	41	110	46	46	7
1131	50	22	51	120	46	46	7
1131	100	22	64	130	58	58	7
1131	125	23	70	130	58	58	7
1131	250	34	85	200	76	58	8
1131	500	34	105	250	96	96	9
1131	1000	34	131	300	112	112	10
1131	2000	46	175	410	120	128	12

Retort, With ground-in glass stopper

ITEM CODE	Capacity(ml)	O.D. of bulb(mm)	Length of side neck(mm)
1161	125	70	220
1161	250	86	225
1161	500	105	300
1161	1000	130	340
1161	2000	170	360
1161	5000	228	450
1161	10000	300	600

Evaporating dish, Flat bottom, With spout Boro 3.3 Glass

ITEM CODE	O.D. of top(mm)	Height(mm)
1171	60	30
1171	90	45
1171	120	60
1171	150	75

Evaporating dish, Round bottom, With spout Boro 3.3 Glass

ITEM CODE	O.D. of top(mm)	Height(mm)
1172	60	30
1172	90	45
1172	120	60
1172	150	75

Crystallizing dish with spout Boro 3.3 Glass

ITEM CODE	O.D. of top(mm)	Height(mm)
1173	60	40
1173	90	45
1173	100	50
1173	125	63
1173	150	75
1173	180	90
1173	200	100
1173	230	115

Watch Glass		
ITEM CODE	Diameter(mm)	
1175	45	
1175	60	
1175	70	
1175	80	
1175	90	
1175	100	
1175	120	
1175	150	
1175	180	

GLASS PETRI DISH			
Code	Bottom dia(mm)	Height(mm)	Cover dia(mm)
1177	60	15	65
1177	75	15	82
1177	90	18	98
1177	100	20	107
1177	120	25	130
1177	150	30	160

Condenser, With fused inner tube, Liebig Boro 3.3 Glass				
ITEM CODE	Length of jacket (mm)	O.D. of upper tube (mm)	Cooling area (m ²)	Length (mm)
1213	200	18	0.7	350
1213	250	18	1.0	420
1213	300	20	1.1	480
1213	400	22	1.6	590
1213	500	24	2.2	710
1213	600	24	2.8	810
1213	800	28	4.3	1050
1213	1000	28	5.7	1250

Condenser with bulb inner tube, Allihn Boro 3.3 Glass				
ITEM CODE	Length of jacket (mm)	O.D. of upper tube (mm)	Cooling area (m ²)	Length (mm)
1214	200	18	1.0	350
1214	250	18	1.5	420
1214	300	20	1.8	480
1214	400	22	2.7	590
1214	500	24	3.7	710
1214	600	24	4.9	800
1214	800	28	7.6	1050
1214	1000	28	10.0	1250
1214	1200	33	12.7	1360
1214	1500	33	17.0	1720

Condenser with coiled inner tube, Graham Boro 3.3 Glass				
ITEM CODE	Length of jacket (mm)	O.D. of upper tube (mm)	Cooling area (m ²)	Length (mm)
1215	200	18	2.3	350
1215	250	20	2.7	420
1215	300	20	3.3	480
1215	400	22	4.7	590
1215	500	24	7.0	710
1215	600	24	8.2	810

Test tubes with rim, Plain, Boro 3.3 glass or Neutral Glass		
ITEM CODE	O.D. of tube (mm)	Length (mm)
1232	10	100
1232	12	100
1232	13	100
1232	13	130
1232	15	100
1232	15	150
1232	16	125
1232	16	155
1232	18	150
1232	18	180
1232	19	150
1232	21	150
1232	21	180
1232	21	200
1232	25	180
1232	30	200
1232	41	225

Test tube with graduations				
ITEM CODE	Capacity (ml)	Graduation (ml)	O.D. of tube (mm)	Length (mm)
1236	5	0.1	11	110
1236	10	0.2	14	130
1236	15	0.2	15	150
1236	20	0.5	17	165
1236	25	0.5	18	180
1236	30	0.5	19	180
1236	50	1.0	23	200

Glass Centrifuge Tube Conical			
Code	Capacity (ml)	O.D. of Tube (mm)	Length (mm)
1241	5	14	90
1241	10	17	110
1241	15	19	120
1241	25	23	140
1241	50	33	150

Glass Centrifuge Tube Conical with Graduation



Code	Capacity(ml)	Graduation (ml)	O.D. of Tube (mm)	Length (mm)
1242	5	0.1	14	90
1242	10	0.1	17	110
1242	15	0.1	19	120
1242	25	0.2	23	140
1242	50	0.2	33	150

Stopcock, Straight bore, Two-way



ITEM CODE	Bore of core(mm)	O.D. of side arm(mm)	Length of side arm(mm)
1271	2	8	120
1271	4	8	120
1271	6	10	120
1271	8	12	120
1271	10	14	120
1271	12	17	120
1271	15	20	120
1271	20	23	120

Glass Stirrer Rod



ITEM CODE	O.D. of Rod (mm)	Length (mm)
1254	7.8	330

Weighing bottle, Tall form



ITEM CODE	O.D.(mm)	Length(mm)
1301	25	25
1301	25	40
1301	30	50
1301	30	60
1301	35	70
1301	40	70
1301	45	30
1301	45	70

Weighing bottle, Low form



ITEM CODE	O.D.(mm)	Length(mm)
1302	30	20
1302	30	25
1302	40	25
1302	50	30
1302	60	30
1302	60	35
1302	60	40
1302	70	30
1302	70	35
1302	70	40

Gas drying tower



ITEM CODE	Capacity(ml)	O.D. of body(mm)	Height(mm)
1311	250	50	330
1311	500	60	400

Desiccator with Porcelain Plate, Clear Glass



ITEM CODE	I.D. (mm)	Total Height (mm)	Height of Body (mm)
1351	120	180	110
1351	150	220	135
1351	180	260	160
1351	210	275	180
1351	240	325	210
1351	300	355	235
1351	350	400	255
1351	400	460	300

Desiccator with porcelain plate, Amber glass



ITEM CODE	I.D. (mm)	Total Height (mm)	Height of body (mm)
1352	120	180	110
1352	150	220	135
1352	180	260	160
1352	210	275	180
1352	240	325	210
1352	300	355	235
1352	350	400	255
1352	400	460	300

Vacuum Desiccator with Ground-in Stopcock and Porcelain Plate, Clear Glass				
ITEM CODE	I.D.(mm)	Total Height (mm)	Height of Body (mm)	
1354	120	180	110	
1354	150	220	135	
1354	180	260	160	
1354	210	275	180	
1354	240	325	210	
1354	300	355	235	
1354	350	400	255	
1354	400	460	300	

Vacuum desiccator with ground-in stopcock and porcelain plate, Amber glass				
ITEM CODE	I.D.(mm)	Total height (mm)	Height of body (mm)	
1355	120	180	110	
1355	150	220	135	
1355	180	260	160	
1355	210	275	180	
1355	240	325	210	
1355	300	355	235	
1355	350	400	255	
1355	400	460	300	

Alcohol lamp with plastic cap or glass cap			
Item Code	Capacity(ml)	Height (mm)	
1381	150	118	
1381	250	130	

Reagent bottle, Clear glass narrow mouth with ground in glass or plastic stopper					
Item Code	Capacity(ml)	Dia of body (mm)	Dia of mouth (mm)	Height (mm)	
1401	30	40	18	76	
1401	60	46	22	85	
1401	125	57	24	110	
1401	250	70	27	135	
1401	500	85	33	172	
1401	1000	106	38	202	
1401	2500	145	48	270	
1401	5000	185	58	338	
1401	10000	225	68	430	
1401	20000	265	82	520	

Reagent bottle, Amber glass narrow mouth with ground-in glass or plastic stopper					
Item Code	Capacity(ml)	Dia of body (mm)	Dia of mouth (mm)	Height (mm)	
1402	30	40	18	76	
1402	60	46	22	85	
1402	125	57	24	110	
1402	250	70	27	135	
1402	500	85	33	172	
1402	1000	106	38	202	
1402	2500	145	48	270	
1402	5000	185	58	338	
1402	10000	225	68	430	
1402	20000	265	82	520	

Reagent bottle, Clear glass wide mouth with ground-in glass or plastic stopper					
ITEM CODE	Capacity(ml)	Dia of body (mm)	Dia of mouth (mm)	Height (mm)	
1403	30	40	25	72	
1403	60	46	30	80	
1403	125	57	38	108	
1403	250	70	50	130	
1403	500	85	58	165	
1403	1000	106	65	188	
1403	2500	145	90	260	
1403	5000	185	110	330	
1403	10000	227	115	398	
1403	20000	288	122	492	

Reagent bottle, Amber glass wide mouth with ground-in glass or plastic stopper					
ITEM CODE	Capacity(ml)	Dia of body (mm)	Dia of mouth (mm)	Height (mm)	
1404	30	40	25	72	
1404	60	46	30	80	
1404	125	57	38	108	
1404	250	70	50	130	
1404	500	85	58	165	
1404	1000	106	65	188	
1404	2500	145	90	260	
1404	5000	185	110	330	
1404	10000	227	115	398	
1404	20000	288	122	492	

Reagent bottle (Media bottle), with plastic blue screw cap					
ITEM CODE	Capacity(ml)	Dia of body (mm)	Height(mm)	GL	
1407	100	56	100	45	
1407	250	70	136	45	
1407	500	86	176	45	
1407	1000	101	225	45	
1407	2000	136	260	45	
1407	5000	186	330	45	
1407	10000	234	410	45	
1407	20000	299	505	45	

Reagent bottle (media bottle), amber glass, with plastic blue screw cap



ITEM CODE	Capacity (ml)	O.D. of body (mm)	Height (mm)	Height (mm)
1408	100	56	100	198
1408	250	70	138	138
1408	500	86	176	176
1408	1000	101	225	225
1408	2000	136	260	260
1408	5000	186	330	330
1408	10000	234	410	410
1408	20000	299	505	505

Aspirator bottle



ITEM CODE	Capacity (ml)	Dia. of neck (mm)	Dia. of lower mouth (mm)	Height (mm)
1421	2500	48	30	270
1421	5000	58	32	345
1421	10000	68	35	420
1421	20000	82	38	500

Filtering Flask, Clear glass with upper tubulature Boro 3.3 Glass or Neutral Glass



Code	Vol (ml)	O.D. (mm)	Suitable for glue plug number (mm)	Bottle height (mm)
1432	125	9	8	120
1432	250	9	11	160
1432	500	9	11	210
1432	1000	9	14	245
1432	2500	11	19	290
1432	5000	11	22	370
1432	10000	13	25	450

Dropping bottle, clear glass with ground-in pipette and latex rubber nipple



ITEM CODE	Capacity (ml)	O.D. of mouth (mm)	Height (mm)
1451	30	40	76
1451	60	46	85
1451	125	57	110

Dropping bottle, Amber glass with ground-in pipette and latex rubber nipple



ITEM CODE	Capacity (ml)	O.D. of mouth (mm)	Height (mm)
1452	30	40	76
1452	60	46	85
1452	125	57	110

Funnel, long stem 60° approx. Boro 3.3 glass



ITEM CODE	Diameter (mm)	O.D. of stem (mm)	Length of stem (mm)
1503	50	7	150
1503	60	8	150
1503	75	9	150
1503	90	11	150

Funnel, Short stem 60° approx. Boro 3.3 Glass



ITEM CODE	Diameter (mm)	O.D. of stem (mm)	Length of stem (mm)
1504	40	7	40
1504	50	7	50
1504	60	8	60
1504	75	9	75
1504	90	11	90
1504	100	13	100
1504	120	15	120
1504	150	17	150
1504	180	18	180
1504	210	21	180
1504	240	24	180
1504	300	26	200

Separatory Funnel



ITEM CODE	Capacity (ml)	O.D. of stem length (mm)	Total height (mm)
1543	10	8x60	123
1543	20	8x60	135
1543	60	10x70	220
1543	125	10x70	260
1543	250	11x70	290
1543	500	12x70	330
1543	1000	12x70	480

Measuring cylinder, With spout and graduations, with glass round base or plastic base



ITEM CODE	Capacity (ml)	Sub Division (ml)	Capacity tolerance (ml)	Height (mm)
1601	5	0.1	0.1	110
1601	10	0.2	0.2	135
1601	25	0.5	0.5	160
1601	50	1.0	0.5	195
1601	100	1.0	1.0	250
1601	250	2 or 5	2.0	300
1601	500	5.0	5.0	350
1601	1000	10.0	10.0	430
1601	2000	20.0	20.0	500

Measuring cylinder, with glass hexagonal base, with graduation



ITEM CODE	Capacity (ml)	Accuracy/limits (±ml)	Graduation divisions (ml)	Length (mm)
1601H	5	0.1	0.1	115
1601H	10	0.2	0.2	135
1601H	25	0.5	0.5	160
1601H	50	1	1	195
1601H	100	1	1	240
1601H	250	2	2	320
1601H	500	5	5	380
1601H	1000	10	10	465
1601H	2000	20	20	565

Measuring cylinder, with plastic hexagonal base, with graduation



ITEM CODE	Capacity (ml)	Accuracy/limits (±ml)	Graduation divisions (ml)	Length (mm)
1601P	5	0.1	0.1	115
1601P	10	0.2	0.2	135
1601P	25	0.5	0.5	160
1601P	50	1	1	195
1601P	100	1	1	240
1601P	250	2	2	320
1601P	500	5	5	380
1601P	1000	10	10	465
1601P	2000	20	20	565

Measuring cylinder with graduation and ground-in glass stopper



ITEM CODE	Capacity (ml)	Accuracy/limits (±ml)	Graduation divisions (ml)	Length (mm)
1603	10	0.2	0.1	150
1603	25	0.5	0.25	150
1603	50	1.0	0.25	215
1603	100	1.0	0.5	278
1603	250	2 or 5	1.0	320
1603	500	5.0	2.5	380
1603	1000	10.0	5.0	460
1603	2000	20.0	10.0	530

Graduate with spout, short line



ITEM CODE	Capacity (ml)	Sub Division (ml)	Capacity tolerance (ml)	Height (mm)
1611	5	0.5	0.3	80
1611	10	1	0.5	95
1611	20	2	0.6	115
1611	50	5	1	135
1611	100	10	1.5	165
1611	250	25	3	205
1611	500	50	6	250
1611	1000	50	10	310

Volumetric flask with one graduation mark, With ground-in glass stopper or plastic stopper



ITEM CODE	Capacity (ml)	Capacity tolerance (ml)	Ground mouth	Height (mm)
1621A	10	0.02	7/11	90
1621A	25	0.03	10/13	110
1621A	50	0.05	10/13	140
1621A	100	0.10	12/14	170
1621A	200	0.15	14/15	210
1621A	250	0.15	14/15	220
1621A	500	0.25	16/16	260
1621A	1000	0.40	19/17	310
1621A	2000	0.60	24/20	370

Volumetric flask with one graduation mark, with ground-in glass stopper or plastic stopper



ITEM CODE	Capacity (ml)	Capacity tolerance (ml)	Ground mouth	Height (mm)
1621B	5	0.04	7/11	74
1621B	10	0.04	7/11	90
1621B	25	0.06	10/13	110
1621B	50	0.1	10/13	140
1621B	100	0.2	12/14	170
1621B	200	0.3	14/15	210
1621B	250	0.3	14/15	220
1621B	500	0.5	16/16	260
1621B	1000	0.8	19/17	310
1621B	2000	1.2	24/20	370

Volumetric flask, amber glass grade A, with ground-in glass stopper or plastic stopper



ITEM CODE	Capacity (ml)	Capacity tolerance (ml)	Ground mouth	Height (mm)
1622A	50	0.05	10/13	140
1622A	100	0.1	12/14	170
1622A	200	0.15	14/15	210
1622A	250	0.15	14/15	220
1622A	500	0.25	16/16	260
1622A	1000	0.4	19/17	310
1622A	2000	0.6	24/20	370

Volumetric flask, amber, with ground-in glass stopper or plastic stopper



ITEM CODE	Capacity (ml)	Capacity tolerance (±ml)	Ground mouth	Height (mm)
1622B	5	0.04	7/11	74
1622B	10	0.04	7/11	90
1622B	25	0.06	10/13	118
1622B	50	0.1	10/13	140
1622B	100	0.2	12/14	179
1622B	200	0.3	14/15	219
1622B	250	0.3	14/15	220
1622B	500	0.5	16/16	260
1622B	1000	0.8	19/17	310
1622B	2000	1.2	24/20	370

Measuring pipette, Class A, Graduated with zero at top



ITEM CODE	Capacity (ml)	Graduation (ml)	Capacity tolerance (±ml)	Flow rate (s)	Length (mm)
1630A	1	0.01	0.008	4-10	350
1630A	2	0.02	0.012	4-12	350
1630A	5	0.05	0.025	6-14	350
1630A	10	0.10	0.050	7-17	350
1630A	25	0.10	0.10	11-21	470
1630A	50	0.20	0.10	15-25	480

Measuring pipette, class B, graduated with zero at top



ITEM CODE	Capacity (ml)	Graduation (ml)	Capacity tolerance (±ml)	Flow rate (s)	Length (mm)
1630B	0.1	0.001	0.004	2-5	320
1630B	0.2	0.002	0.006	2-5	320
1630B	0.25	0.0025	0.008	2-5	320
1630B	0.5	0.005	0.01	2-5	320
1630B	1	0.01	0.015	3-6	350
1630B	2	0.02	0.025	3-6	350
1630B	5	0.05	0.05	5-10	350
1630B	10	0.1	0.1	5-10	350
1630B	25	0.1	0.02	13-30	470
1630B	50	0.2	0.02	18-40	480

Volumetric pipette, with one mark, Class A



ITEM CODE	Capacity (ml)	Capacity tolerance (±ml)	Flow rate (s)	Length (mm)
1633A	1	0.007	7-12	330
1633A	2	0.01	7-12	340
1633A	3	0.015	15-25	360
1633A	5	0.015	15-25	400
1633A	10	0.02	20-30	450
1633A	15	0.025	20-30	520
1633A	20	0.03	25-35	560
1633A	25	0.03	25-35	570
1633A	50	0.05	30-40	600
1633A	100	0.08	35-45	640

Volumetric Pipette, With one mark, Class B



ITEM CODE	Capacity (ml)	Capacity tolerance (±ml)	Flow rate (s)	Length (mm)
1633B	1	0.015	5-12	330
1633B	2	0.020	5-12	340
1633B	3	0.03	10-25	360
1633B	5	0.030	10-25	360
1633B	10	0.040	15-30	400
1633B	15	0.05	15-30	450
1633B	20	0.060	20-35	520
1633B	25	0.060	20-35	560
1633B	50	0.100	25-40	570
1633B	100	0.160	30-45	600
1633B	200	0.200	40-60	640

Burette with Rubber Tubing Connection, Glass Bead and Glass Tip



Item Code	Capacity (ml)	Graduation (ml)	Capacity tolerance (±ml)	Flow Rate (s)	Length (mm)
1641A	10	0.05	0.025	30-45	600
1641A	25	0.1	0.05	45-70	630
1641A	50	0.1	0.05	60-90	860
1641A	100	0.2	0.1	70-100	860

Burette with Rubber Tubing Connection, Glass Bead and Glass Tip



Item Code	Capacity (ml)	Graduation (ml)	Capacity tolerance (±ml)	Flow Rate (s)	Length (mm)
1641B	10	0.05	0.05	20-40	600
1641B	25	0.1	0.1	35-70	630
1641B	50	0.1	0.1	50-90	860
1641B	100	0.2	0.1	60-100	860

Burette with straight stopcock



Item Code	Capacity (ml)	Graduation (ml)	Capacity tolerance (±ml)	Length (mm)
1642A	10	0.05	0.025	600
1642A	25	0.1	0.05	630
1642A	50	0.1	0.05	860
1642A	100	0.2	0.1	860

Burette with straight stopcock					
	Item Code	Capacity (ml)	Graduation (ml)	Capacity tolerance(±ml)	Length(mm)
	1642B	10	0.05	0.05	600
	1642B	25	0.1	0.1	630
	1642B	50	0.1	0.1	860
	1642B	100	0.2	0.2	860

Burette with PTFE Stopcock					
	ITEM CODE	Capacity (ml)	Graduation (ml)	Capacity tolerance(±ml)	Length(mm)
	8642A	10	0.05	0.025	600
	8642A	25	0.1	0.05	630
	8642A	50	0.1	0.05	860
	8642A	100	0.2	0.1	860

Burette with Blue Line on Milk White Back Rubber Tubing Connection, Glass Bead and Glass Tip					
	Item Code	Capacity (ml)	Graduation (ml)	Capacity tolerance(±ml)	Length(mm)
	8642B	10	0.05	0.05	600
	8642B	25	0.1	0.1	630
	8642B	50	0.1	0.1	860
	8642B	100	0.2	0.2	860

Burette with blue line on milk white back straight stopcock, schellbach					
	ITEM CODE	Capacity (ml)	Graduation (ml)	Capacity tolerance(±ml)	Length(mm)
	1645A	10	0.05	0.025	600
	1645A	25	0.1	0.05	630
	1645A	50	0.1	0.05	860
	1645A	100	0.2	0.1	860

Burette with blue line on milk white back straight stopcock, schellbach					
	ITEM CODE	Capacity (ml)	Graduation (ml)	Capacity tolerance(±ml)	Length(mm)
	1645B	10	0.05	0.05	600
	1645B	25	0.1	0.1	630
	1645B	50	0.1	0.1	860
	1645B	100	0.2	0.2	860

Burette, amber glass with rubber tubing connection, glass bead and glass tip					
	ITEM CODE	Capacity (ml)	Graduation (ml)	Capacity tolerance(±ml)	Length(mm)
	1647A	10	0.05	0.025	600
	1647A	25	0.1	0.05	630
	1647A	50	0.1	0.05	860
	1647A	100	0.2	0.1	860

Burette with Rubber Tubing Connection, Glass Bead and Glass Tip					
	ITEM CODE	Capacity (ml)	Graduation (ml)	Capacity tolerance(±ml)	Length(mm)
	1647B	10	0.05	0.05	600
	1647B	25	0.1	0.1	630
	1647B	50	0.1	0.1	860
	1647B	100	0.2	0.2	860

Burette, Amber glass with straight stopcock					
	Item Code	Capacity (mm)	Graduation (mm)	Capacity tolerance(±ml)	Length(mm)
	1648B	10	0.05	0.05	600
	1648B	25	0.1	0.1	630
	1648B	50	0.1	0.1	860
	1648B	100	0.2	0.2	860

Burette, amber glass with straight stopcock

ITEM CODE	Capacity (ml)	Graduation (ml)	Capacity tolerance(±ml)	Length(mm)
1648A	10	0.05	0.025	600
1648A	25	0.1	0.05	630
1648A	50	0.1	0.05	860
1648A	100	0.2	0.1	860

Water determination apparatus with ground-in glass joints

Item Code	Spare parts
1781	500ml round boiling flask
1781	10ml receiving tube
1781	400mm straight condenser

Colorimeter tube with glass hollow stopper

CODE	Capacity(ml)	Graduation(ml)	Tolerance(±ml)	Height(mm)
1872	10	5,10	0.1	140
1872	25	20,25	0.25	170
1872	50	25,50	0.4	200
1872	100	50,100	0.6	240

Specific Gravity Bottle Gay-Lussac

Item Code	Capacity (ml)	Diameter of Mouth (mm)	Height(mm)
1861	5	7	60
1861	10	7	70
1861	25	10	85
1861	50	10	100
1861	100	10	110

Specific Gravity Bottle Lechatellier

Item Code	Capacity (ml)	O.D. of Bulb (mm)	Graduation (ml)	Height (mm)
1862	250	90	24	250

Pycnometer (Specific Gravity Bottle, SG Bottle) with Thermometer with Side Capillary Tube and Ground Cap

Item Code	Volume	Thermometer
1863	5ml	10°C-40°C
1863	10ml	
1863	25ml	
1863	50ml	
1863	100ml	

Filter funnel (Buchner funnel), with fritted disc

Item Code	Capacity	Porosity
1902	30	3
1902	30	4
1902	70	3
1902	70	4
1902	125	3
1902	125	4
1902	250	3
1902	250	4
1902	500	3
1902	500	4

Filter funnel (Buchner funnel), with fritted disc With ground joint

Item Code	Capacity	Porosity	Size
1903	15	3	14/13
1903	15	4	14/13
1903	15	3	24/29
1903	15	4	24/29
1903	30	3	14/13
1903	30	4	14/13
1903	30	3	24/29
1903	30	4	24/29
1903	50	3	14/13
1903	50	4	14/13
1903	50	3	24/29
1903	50	4	24/29

Filtration Apparatus with Aluminum Clamp or Stainless Steel Clamp, with fritted disc



ITEM CODE	Funnel (ml)	Conical Flask (ml)
1908	10ml	125ml
1908	15ml	125ml
1908	25ml	125ml
1908	300ml	250ml
1908	300ml	500ml
1908	300ml	1000ml
1908	300ml	2000ml
1908	300ml	3000ml
1908	300ml	5000ml

Boiling Flask, Round Bottom, Short neck, Standard ground mouth



ITEM CODE	CAPACITY (ML)	GROUND MOUTH D. of Bulb (MM)	HEIGHT (MM)
S001	25	10/19	41
S001	25	14/23	41
S001	25	19/26	41
S001	30	14/23	53
S001	30	19/26	53
S001	50	24/29	53
S001	50	29/32	53
S001	100	14/23	65
S001	100	19/26	65
S001	100	24/32	65
S001	100	29/32	65
S001	150	19/26	76
S001	150	24/29	76
S001	250	19/26	88
S001	250	24/29	88
S001	250	29/32	88
S001	500	19/26	110
S001	500	24/29	110
S001	500	29/32	110
S001	500	34/35	110
S001	1000	19/26	140
S001	1000	24/29	140
S001	1000	29/32	140
S001	1000	34/35	175
S001	2000	24/29	175
S001	2000	29/32	175
S001	2000	34/35	199
S001	3000	29/32	199
S001	3000	34/35	199
S001	3000	40/38	199
S001	5000	40/38	235
S001	5000	50/42	235
S001	10000	50/42	297
S001	10000	60/46	297



Boiling Flask, Round Bottom, Long neck, Standard ground mouth



ITEM CODE	CAPACITY (ML)	GROUND MOUTH D. of Bulb (MM)	HEIGHT (MM)
S002	50	14/23	53
S002	50	19/26	53
S002	50	24/29	53
S002	100	19/26	65
S002	100	24/29	65
S002	250	24/29	88
S002	250	29/32	88
S002	500	24/29	110
S002	500	29/32	110
S002	1000	24/29	140
S002	1000	29/32	140
S002	2000	24/29	175
S002	2000	29/32	175
S002	3000	34/35	199
S002	3000	40/38	199
S002	5000	45/40	235
S002	5000	50/42	235
S002	10000	50/42	297
S002	10000	60/46	297

Flask, Oblique shape, With two necks, Standard ground mouth



ITEM CODE	CAPACITY (ML)	GROUND MOUTH D. of Bulb (MM)	HEIGHT (MM)
S003	100	19/26	14/23
S003	100	24/29	14/23
S003	250	19/26	14/23
S003	250	24/29	14/23
S003	250	24/29	19/26
S003	250	29/32	14/23
S003	250	29/32	19/26
S003	500	19/26	14/23
S003	500	24/29	14/23
S003	500	24/29	19/26
S003	500	29/32	14/23
S003	500	29/32	19/26
S003	1000	24/29	14/23
S003	1000	24/29	19/26
S003	1000	24/29	24/29
S003	1000	29/32	14/23
S003	1000	29/32	19/26
S003	1000	29/32	24/29
S003	2000	24/29	19/26
S003	2000	24/29	24/29
S003	2000	29/32	19/26
S003	2000	29/32	24/29



Flask, Oblique shape, With three necks, Standard ground mouth

ITEM CODE	CAPACITY (ML)	MIDDLE GROUND MOUTH	SIDE GROUND MOUTH	HEIGHT (MM)
S004	100	19/26	14/23	106
S004	250	19/26	14/23	134
S004	250	19/26	19/26	134
S004	250	24/29	14/23	139
S004	250	24/29	19/26	139
S004	250	24/29	24/29	139
S004	250	29/32	14/23	145
S004	250	29/32	19/26	145
S004	500	19/26	14/23	158
S004	500	19/26	19/26	158
S004	500	24/29	14/23	161
S004	500	24/29	19/26	161
S004	500	24/29	24/29	161
S004	500	29/32	14/23	167
S004	500	29/32	19/26	167
S004	1000	19/26	14/23	188
S004	1000	19/26	19/26	188
S004	1000	24/29	14/23	196
S004	1000	24/29	19/26	196
S004	1000	24/29	24/29	196
S004	1000	29/32	14/23	200
S004	1000	29/32	19/26	200
S004	1000	29/32	24/29	200
S004	1000	29/32	29/32	200
S004	2000	24/29	24/29	231
S004	2000	29/32	19/26	234
S004	2000	29/32	24/29	234
S004	2000	29/32	29/32	234
S004	3000	29/32	24/29	281
S004	3000	34/35	24/29	284
S004	5000	40/38	24/29	333
S004	5000	50/42	24/29	337

Flask, Straight shape, Standard ground mouth

ITEM CODE	CAPACITY (ML)	MIDDLE GROUND MOUTH	SIDE GROUND MOUTH	HEIGHT (MM)
S005	250	19/26	14/23	134
S005	250	19/26	19/26	134
S005	250	24/29	14/23	139
S005	250	24/29	19/26	139
S005	250	24/29	24/29	139
S005	250	29/32	14/23	145
S005	500	19/26	14/23	158
S005	500	29/26	19/26	158
S005	500	24/29	14/23	161
S005	500	24/29	19/26	161
S005	500	24/29	24/29	161
S005	500	29/32	14/23	167
S005	1000	24/29	14/23	196
S005	1000	24/29	19/26	196
S005	1000	29/32	24/29	200
S005	1000	29/32	29/32	200
S005	2000	24/29	24/29	231
S005	2000	29/32	24/29	234
S005	2000	29/32	29/32	234
S005	2000	34/35	24/29	237
S005	3000	29/32	24/29	281
S005	3000	34/35	24/29	284
S005	5000	40/38	24/29	333

ITEM CODE	CAPACITY (ML)	MIDDLE GROUND MOUTH	SIDE GROUND MOUTH	TRIGHT GROUND MOUTH	HEIGHT (MM)
S006	500	24/29	19/26	14/23	161
S006	500	24/29	24/29or19/26	14/26	161
S006	500	29/32	24/29or19/26	14/26	167
S006	500	29/32	19/26	14/26	167
S006	1000	24/29	19/26	14/23	196
S006	1000	24/29	19/26	19/26	196
S006	2000	24/29	19/26	19/26	231
S006	2000	29/32	24/29or19/26	14/23	234
S006	3000	29/32	19/26	14/23	281
S006	3000	34/35	19/26	14/23	284
S006	3000	34/35	24/29or19/26	19/26	284
S006	5000	40/38	24/29or19/26	14/23	333

Boiling Flask, Flat bottom, short neck, Standard ground mouth

ITEM CODE	CAPACITY (ML)	GROUND MOUTH	O.D of bulb (MM)	HEIGHT (MM)
S007	25	14/23	41	70
S007	50	14/23	53	86
S007	100	19/26	65	100
S007	100	19/26	65	106
S007	100	24/29	65	106
S007	150	19/26	76	117
S007	150	24/29	76	120
S007	250	19/26	88	134
S007	250	24/29	88	139
S007	500	19/26	110	158
S007	500	24/29	110	161
S007	500	29/32	110	167
S007	1000	24/29	140	196
S007	1000	29/32	140	199
S007	2000	29/32	175	234
S007	2000	34/35	175	237
S007	5000	34/35	235	320

Boiling Flask, Flat bottom, Long neck, Standard ground mouth

ITEM CODE	CAPACITY (ML)	GROUND MOUTH	O.D of bulb (MM)	HEIGHT (MM)
S008	50	19/26	53	120
S008	100	19/26	65	140
S008	250	19/26	88	160
S008	250	24/29	88	160
S008	500	24/29	110	200
S008	500	29/32	110	208
S008	1000	24/29	140	250
S008	100	29/32	140	250
S008	2000	29/32	175	300

Conical flask, Standard ground mouth

ITEM CODE	CAPACITY (ML)	GROUND MOUTH	O.D of bulb (MM)	HEIGHT (MM)
S009	5	10/19	25	50
S009	5	14/23	25	50
S009	10	10/19	32	60
S009	10	14/23	32	60
S009	10	19/26	32	60
S009	25	10/19	42	65
S009	25	14/23	42	70
S009	25	19/26	42	75
S009	50	14/23	51	85
S009	50	19/26	51	85
S009	50	24/29	51	90
S009	100	14/23	64	105
S009	100	19/26	64	105
S009	100	24/29	64	105
S009	100	29/32	64	105
S009	150	19/26	71	115
S009	150	24/29	71	115
S009	250	19/26	85	135
S009	250	24/29	85	135
S009	250	29/32	85	128
S009	250	34/35	85	128
S009	500	19/26	105	170
S009	500	24/29	105	170
S009	500	29/32	105	165
S009	500	34/35	105	160
S009	1000	24/29	131	210
S009	1000	29/32	131	210
S009	1000	34/35	131	210
S009	2000	29/32	166	275
S009	2000	34/35	166	275

Filtering flask, Standard ground mouth

ITEM CODE	CAPACITY (ML)	GROUND MOUTH	O.D of bulb (MM)	HEIGHT (MM)
S010	10	10/19	32	60
S010	10	14/23	32	60
S010	25	10/19	42	70
S010	25	14/23	42	70
S010	50	14/23	51	85
S010	50	19/26	51	85
S010	100	19/26	64	105
S010	100	24/29	64	105
S010	250	24/29	85	135
S010	250	29/32	85	135
S010	500	24/29	105	170
S010	500	29/32	105	170
S010	1000	24/29	131	210
S010	1000	29/32	131	210

Flask, Eggplant shape, Standard ground mouth

ITEM CODE	CAPACITY (ML)	GROUND MOUTH	O.D of bulb (MM)	HEIGHT (MM)
S011	5	10/19	26	50
S011	10	10/19	30	70
S011	10	14/23	30	70
S011	25	10/19	39	80
S011	25	14/23	39	80
S011	25	19/26	39	80
S011	50	14/23	51	100
S011	50	19/26	51	100
S011	50	24/29	51	100
S011	50	29/32	51	100
S011	100	14/23	60	110
S011	100	19/26	60	110
S011	100	24/29	60	110
S011	100	29/32	60	110
S011	250	19/26	81	140
S011	250	24/29	81	140
S011	250	29/32	81	140
S011	500	24/29	101	170
S011	500	29/32	101	170
S011	1000	24/29	125	210
S011	1000	29/32	125	210

Flask, Eggplant shape, Long neck, Standard ground mouth

ITEM CODE	CAPACITY (ML)	GROUND MOUTH	O.D of bulb (MM)	HEIGHT (MM)
S012	25	14/23	40	140
S012	50	14/23	52	190
S012	50	19/26	52	190
S012	100	19/26	60	220
S012	100	24/29	60	220
S012	250	19/26	82	270
S012	250	24/29	82	270
S012	500	24/29	107	310
S012	500	29/32	107	310
S012	1000	29/32	130	370

Flask, Pear shape, Standard ground mouth					
ITEM CODE	CAPACITY (ML)	GROUND MOUTH	O.D. of bulb (MM)	HEIGHT (MM)	
5013	10	10/19	30	76	
5013	10	14/23	30	79	
5013	25	10/19	40	90	
5013	25	14/23	40	93	
5013	25	19/26	40	95	
5013	50	14/23	50	108	
5013	50	19/26	50	110	
5013	100	14/23	60	118	
5013	100	19/26	60	121	

Flask, Pear shape, With two necks, Standard ground mouth					
ITEM CODE	CAPACITY (ML)	MIDDLE GROUND MOUTH	SIDE GROUND MOUTH	O.D. of bulb (MM)	HEIGHT (MM)
5014	25	10/19	10/19	40	102
5014	25	14/23	14/23	40	108
5014	25	19/26	14/23	40	110
5014	90	10/19	10/19	50	112
5014	90	14/23	14/23	50	118
5014	90	19/26	14/23	50	120
5014	100	14/23	14/23	60	128
5014	100	19/26	14/23	60	132
5014	100	19/26	19/26	60	132

Straight condenser tubes					
CODE	Size/mm	Di. of mouth/mm	Effective length/mm	Total length/mm	Weight/g
5021	200 14/23	14	200	290	144
5021	200 19/26	19	200	300	151
5021	200 24/29	24	200	305	165
5021	200 29/32	29	200	340	185
5021	300 19/26	19	300	395	217
5021	300 24/29	24	300	415	239
5021	300 29/32	29	300	435	255
5021	400 19/26	19	400	505	282
5021	400 24/29	24	400	505	288
5021	400 29/32	29	400	540	304
5021	500 19/26	19	500	615	373
5021	500 24/29	24	500	620	392
5021	500 29/32	29	500	650	390
5021	600 19/26	19	600	710	380
5021	600 24/29	24	600	710	422
5021	600 29/32	29	600	745	447

Straight condenser tubes					
CODE	Size/mm	Di. of mouth/mm	Effective length/mm	Total length/mm	Weight/g
5022	200 14/23	14	200	290	141
5022	200 19/26	19	200	290	153
5022	200 24/29	24	200	300	169
5022	200 29/32	29	200	340	189
5022	300 14/23	14	300	395	228
5022	300 19/26	19	300	405	233
5022	300 24/29	24	300	420	256
5022	300 29/32	29	300	455	275
5022	400 19/26	19	400	495	278
5022	400 24/29	24	400	515	294
5022	400 29/32	29	400	535	309
5022	500 19/26	19	500	600	356
5022	500 24/29	24	500	595	349
5022	500 29/32	29	500	630	394
5022	600 19/26	19	600	705	414
5022	600 24/29	24	600	705	422
5022	600 29/32	29	600	720	454

Serpentine condenser tubes					
CODE	Size/mm	Di. of mouth/mm	Effective length/mm	Total length/mm	Weight/g
5023	200 14/23	14	200	300	175
5023	200 19/26	19	200	305	186
5023	200 24/29	24	200	305	209
5023	300 19/26	19	300	405	281
5023	300 24/29	24	300	415	300
5023	300 29/32	29	300	445	316
5023	400 19/26	19	400	520	364
5023	400 24/29	24	400	510	360
5023	400 29/32	29	400	535	379
5023	500 19/26	19	500	610	445
5023	500 24/29	24	500	620	460
5023	500 29/32	29	500	640	482
5023	600 19/26	19	600	720	530
5023	600 24/29	24	600	730	550
5023	600 29/32	29	600	750	555

Distilling head, Standard ground mouth				
ITEM CODE	Upper ground	Lower ground stopper	Oblique ground stopper	
5035	14/23	34/35	24/29	
5035	19/26	19/26	19/26	
5035	19/26	24/29	24/29	
5035	19/26	29/32	29/32	
5035	24/29	24/35	24/29	
5035	29/32	29/32	29/32	

Distilling head 105° bent, Standard ground mouth				
ITEM CODE	Upper ground	Lower ground stopper	Side ground stopper	
5043	14/23	19/26	19/26	
5043	14/23	24/29	24/29	
5043	14/23	29/32	29/32	

Vacuum receiving tube, Standard ground mouth			
ITEM CODE	Ground mouth	ground stopper	
5054A	10/19	10/19	
5054A	14/23	14/23	
5054A	14/23	19/26	
5054A	19/26	19/26	
5054A	19/26	24/29	
5054A	24/29	24/29	
5054A	24/29	29/32	
5054A	29/32	29/32	

Receiving tube 105° bent, Standard ground mouth			
ITEM CODE	Ground mouth	ground stopper	
5054B	10/19	10/19	
5054B	14/23	14/23	
5054B	14/23	19/26	
5054B	19/26	19/26	
5054B	19/26	24/29	
5054B	24/29	24/29	
5054B	24/29	29/32	
5054B	29/32	29/32	

Adapter 105° bent, Standard ground mouth			
	ITEM CODE	Ground mouth	Total length(mm)
	S055	10/19	110
	S055	14/23	120
	S055	19/26	130
	S055	24/29	140
	S055	29/32	150

Suction adapter, Straight, Standard ground mouth			
	ITEM CODE	Ground mouth	Ground stopper
	S056	10/19	10/19
	S056	14/23	14/23
	S056	14/23	19/26
	S056	19/26	19/26
	S056	19/26	24/29
	S056	24/29	24/32
	S056	24/32	29/32

Receiving test tube, Standard ground mouth			
	CODE	Ground mouth	O.D. of side tube(mm)
	S057	14/23	10
	S057	19/26	12
	S057	24/29	12

Glass Pasteur Pipette				
Item Code	Length(mm)	Tip	Mouth	
8305-1	230	Closed	With Cotton in mouth	
8305-2	150	Closed	With Cotton in mouth	
8305-3	230	Open	Without Cotton in mouth	
8305-4	150	Open	Without Cotton in mouth	

Separatory funnel, pear shape, with ground-in glass stopper and PTFE stopcock				
	ITEM CODE	Capacity (ml)	OD of stem x length (mm)	Total height (mm)
	8543	60	10x70	220
	8543	125	10x70	260
	8543	250	11x70	290
	8543	500	12x70	330
	8543	1000	12x70	400

Blood Counting Chamber Neubauer Improved			
	Item Code	Material	Special Depth
	TY015	Normal Glass	0.100mm
	TY016	Ultra White Glass	0.100mm
	TY015-1	Ultra White Glass with Bright line	0.100/0.200mm

glass capillary tube						
Code	Description	LD(mm)	OD(mm)	Packing	Carton Size (cm)	Weight(kg)
TYG19	Glass Without heparin, blue top	1.1-1.2	1.5-1.6	100pcs/bag, 5000pcs/ctn	27*26*45	16
TYG19-1				500pcs/bag, 5000pcs/ctn	49*24*18	14
TYG20	Glass With heparin, red top	1.1-1.2	1.5-1.6	100pcs/bag, 5000pcs/ctn	27*26*45	16
TYG20-1				500pcs/bag, 5000pcs/ctn	49*24*18	14

Glass test tube			
Code	Diameter (mm)	Length (mm)	
TYG01	12	75	
TYG01-1	10	75	
TYG02	12	100	
TYG03	13	100	
TYG03-1	13	75	
TYG03-2	14	120	
TYG04	15	100	
TYG04-1	15	120	
TYG05	16	100	
TYG06	16	150	
TYG06-16	16	160	
TYG07	18	180	
TYG08	20	150	
TYG08-1	20	175	
TYG09	20	200	
TYG10	25	200	
TYG10-1	25	150	
TYG42	8	30	
TYG43	8	35	
TYG44	8	50	
TYG45	6	30	
TYG46	6	35	
TYG47	6	50	
TYG48	22	200	
TYG49	26	150	
TYG50	30	200	
TYG51	24	150	
TYG52	24	200	
TYG53	26	200	
TYG54	30	150	
TYG55	22	150	
TYG56	30	120	

Glass Test Tube with Screw Cap			
ITEM CODE	Diameter(mm)	Length(mm)	
TYG02-1	12	100	
TYG11	13	100	
TYG12	15	100	
TYG13	15	150	
TYG05-1	16	100	
TYG14	16	150	
TYG16-1	16	125	
TYG24	16	160	
TYG15-1	18	145	
TYG18-3	18	150	
TYG15	18	180	
TYG16	20	150	
TYG15-2	20	180	
TYG17	20	200	
TYG18	25	200	
TYG26	25	150	

Adhesion slide: 26*76mm, (1" * 3"), 45° corners, ground edges, positive charged.							
Code	Specification	Dimension (mm)	Thickness (mm)	Packing	Carton Size (cm)	Weight (kg)	
TY101	Glass, 45° corners, ground edges, positive charged	26*76 (1" * 3")	1-1.2	50pcs/box, 500boxes/ctn	42*20*16	15	

Cover glass: 0.13-0.17mm thickness							
Code	Material	Dimension (mm)	Thickness (mm)	Packing	Carton Size (cm)	Weight (kg)	
TY1-1818C	Glass	18*18	0.13-0.17	100pcs/box, 500boxes/ctn	31*33*14	10	
TY1-1818C-1				200pcs/box, 200boxes/ctn	36*42*24	17	

Cover glass: 0.13-0.17mm thickness							
Code	Material	Dimension (mm)	Thickness (mm)	Packing	Carton Size (cm)	Weight (kg)	
TY1-2020C	Glass	20*20	0.13-0.17	100pcs/box, 500boxes/ctn	31*33*14	11	

Cover glass: 0.13-0.17mm thickness							
Code	Material	Dimension (mm)	Thickness (mm)	Packing	Carton Size (cm)	Weight (kg)	
TY1-2222C	Glass	22*22	0.13-0.17	100pcs/box, 500boxes/ctn	31*33*14	12	
TY1-2222C-1				200pcs/box, 200boxes/ctn	36*42*27	17	

Cover glass: 0.13-0.17mm thickness							
Code	Material	Dimension (mm)	Thickness (mm)	Packing	Carton Size (cm)	Weight(kg)	
TY1-2240C	Glass	22*40	0.13-0.17	100pcs/box, 250boxes/ctn	35*34*14	19	
Code	Material	Dimension (mm)	Thickness (mm)	Packing	Carton Size (cm)	Weight(kg)	
TY1-2440C	Glass	24*40	0.13-0.17	100pcs/box, 250boxes/ctn	36*50*14	14	

Cover glass: 0.13-0.17mm thickness							
Code	Material	Dimension (mm)	Thickness (mm)	Packing	Carton Size (cm)	Weight (kg)	
TYI-2424C	Glass	24*24	0.13-0.17	100pcs/box, 500boxes/ctn	39*39*14	14	

Cover glass: 0.13-0.17mm thickness							
Code	Material	Dimension (mm)	Thickness (mm)	Packing	Carton Size (cm)	Weight (kg)	
TYI-2432C	Glass	24*32	0.13-0.17	100pcs/box, 500boxes/ctn	39*39*14	14	

Cover glass: 0.13-0.17mm thickness							
Code	Material	Dimension (mm)	Thickness (mm)	Packing	Carton Size (cm)	Weight (kg)	
TYI-2450C	Glass	24*50	0.13-0.17	100pcs/box, 250boxes/ctn	35*54*14	20	

Cover glass: 0.13-0.17mm thickness							
Code	Material	Dimension (mm)	Thickness (mm)	Packing	Carton Size (cm)	Weight (kg)	
TYI-2460C	Glass	24*60	0.13-0.17	100pcs/box, 250boxes/ctn	36*39*14	20	

Microscope Slide 7101							
Code	Specification	Dimension (mm)	Thickness (mm)	Packing	Carton Size (cm)	Weight (kg)	
TYI-7101A	Glass, polished edges, plain	25x75mm 25x76mm 25.4x76.2mm (1"x3")	1-1.2 (mm)	50pcs/box, 500boxes/ctn	37*18*16	14	
TYI-7101B	Glass, polished edges, plain			50pcs/box, 500boxes/ctn	37*18*16	14	
TYI-7101-805	Glass, out edges			65pcs/box, 500boxes/ctn	44*20*16	18	
TYI-7101-72	Glass, out edges			72pcs/box, 500boxes/ctn	44*20*16	20	

Microscope Slide 7102							
Code	Material	Dimension (mm)	Thickness (mm)	Packing	Carton Size (cm)	Weight (kg)	
TYI-7102	Glass, polished edges, frosted one end	25x75mm 25x76mm 25.4x76.2mm (1"x3")	1-1.2	50pcs/box, 500boxes/ctn	37*18*16	16	
TYI-7102 (72)	Glass, polished edges, frosted one end			72pcs/box, 500boxes/ctn	44*20*16	20	

Microscope Slide 7105							
Code	Material	Dimension (mm)	Thickness (mm)	Packing	Carton Size (cm)	Weight (kg)	
TYI-7105	Glass, polished edges, frosted one end	25x75mm 25x76mm 25.4x76.2mm (1"x3")	1-1.2	50pcs/box, 500boxes/ctn	37*18*16	14	
TYI-7105 (72)	Glass, polished edges, frosted one end			72pcs/box, 500boxes/ctn	44*20*16	20	

Microscope Slide 7107							
Code	Material	Dimension (mm)	Thickness (mm)	Packing	Carton Size (cm)	Weight (kg)	
TYI-7107	Glass, Polished Edges (45°/90° angle), Frosted one end on both sides	25x75mm 25x76mm 25.4x76.2mm (1"x3")	1-1.2	50pcs/box, 500boxes/ctn	38*18*16	14	

Color Frosted Microscope Slides							
Code	Material	Dimension (mm)	Thickness (mm)	Packing	Carton Size (cm)	Weight (kg)	
TYI-71098	Color frosted one end on one side, ground edges, blue	25.4*76.2 (1" * 3")	1-1.2	50pcs/box, 500boxes/ctn	38*18*16	14	
TYI-71099	Color frosted one end on one side, ground edges, 45°/90° angle, green	25.4*76.2 (1" * 3")	1-1.2	50pcs/box, 500boxes/ctn	38*18*16	14	
TYI-71090	Color frosted one end on one side, ground edges, 45°/90° angle, orange	25.4*76.2 (1" * 3")	1-1.2	50pcs/box, 500boxes/ctn	38*18*16	14	
TYI-71099	Color frosted one end on one side, ground edges, 45°/90° angle, orange	25.4*76.2 (1" * 3")	1-1.2	50pcs/box, 500boxes/ctn	38*18*16	14	
TYI-71099W	Color frosted one end on one side, ground edges, 45°/90° angle, white	25.4*76.2 (1" * 3")	1-1.2	50pcs/box, 500boxes/ctn	38*18*16	14	
TYI-71099	Color frosted one end on one side, ground edges, 45°/90° angle, yellow	25.4*76.2 (1" * 3")	1-1.2	50pcs/box, 500boxes/ctn	38*18*16	14	

Porcelain Crucibles with lid having ringed handle attached, Medium Form

Item Code	Volume (ml)	Rim Diameter (mm)	Height (mm)	Bottom Diameter (mm)
C-17	5	25	22	16
C-18	10	30	29	19
C-18-1	15	35	30	22
C-20	20	38	34	22
C-21	25	40	36	23
C-22	30	42	43	23
C-23	40	47	43	26
C-24	50	53	46	30
C-24-1	70	58	52	33
C-25	100	62	59	35
C-26	150	78	67	40
C-27	200	82	70	43
C-28	300	95	82	49

Porcelain Crucibles with lid having ringed handle attached, Low Form

Item Code	Volume (ml)	Rim Diameter (mm)	Height (mm)	Bottom Diameter (mm)
C-10	15	43	24	20
C-11	25	47	27	25
C-12	30	50	30	25
C-14	50	54	34	26

Porcelain Crucibles with lid having ringed handle attached, Tall Form

Item Code	Volume (ml)	Rim Diameter (mm)	Height (mm)	Bottom Diameter (mm)
C-1	15	32	34	20
C-4	25	38	40	22
C-5	30	40	45	25
C-6-1	40	42	54	27
C-7	50	43	58	28



Porcelain Funnel			
Item code	Diameter (mm)	Height (mm)	Bottom diameter (mm)
C-142	40	70	37
C-144	60	110	61
C-145	80	140	91
C-146	100	160	127
C-147	120	190	169
C-148	150	230	217
C-151	200	275	331
C-152	250	320	469
C-152-2	300	385	547

Porcelain Mortar and Pestle

ITEM CODE	CAPACITY (MM)	Rim Diameter (MM)	HEIGHT (MM)	Bottom Diameter (MM)
C-153	60	60	28	34
C-154	80	80	40	48
C-155	100	100	45	60
C-156	130	130	60	80
C-157	160	160	75	95
C-158	216	210	90	120
C-158-1	254	250	105	130
C-158-2	305	300	130	150



Porcelain Evaporating Dishes

ITEM CODE	Capacity (ml)	Dia. of body (mm)	Height (mm)
C-46	35	60	26
C-48	50	70	28
C-49	60	75	30
C-50	75	82	32
C-51	100	90	34
C-53	125	97	35
C-55	150	104	43
C-57	200	112	39
C-59	250	123	44
C-61	300	131	50
C-63	400	144	55
C-65	500	163	53
C-67	750	180	62
C-68	1000	200	68
C-70	2000	250	80
C-72	3000	300	70
C-73	5000	308	120

