

QUALITY DATA SHEET

Product Description **PROFILES WITH METAL CARRIER**

Report Date **13.11.2024**
 Part Nr **MPRAA25A1M1110**
 Catalog Nr **A5**
 Grip Range **1,0-3,5 mm**

Material Control
1. EPDM Solid Compound

Tests	Units	Limits
Density	Gr / cm ³	1,28-1,32
Hardness	Sho A	67-72
Tensile strength	N / mm ²	Min: 6,00
Elongation at breaking	%	Min: 200,00

2. EPDM Sponge compound (Pressed Plate)

Density	Gr / cm ³	1,19-1,23
Hardness	Sho A	53-57
Tensile strength	N / mm ²	Min: 2,00
Elongation at breaking	%	Min: 150,00


3. Reinforcement : Wire Reinforcement

Width	mm	27 +0.1 /-0.3
Thickness	mm	0,74 ± 0,02

Dimensional Control

C.Nr	Units	Limits
A	mm	15±1,3
B	mm	17,5±1,6
C	mm	7,7±0,7
D	mm	14±0,8
E	mm	4,5±0,5
F	mm	5,2±0,5

Technical Drawing

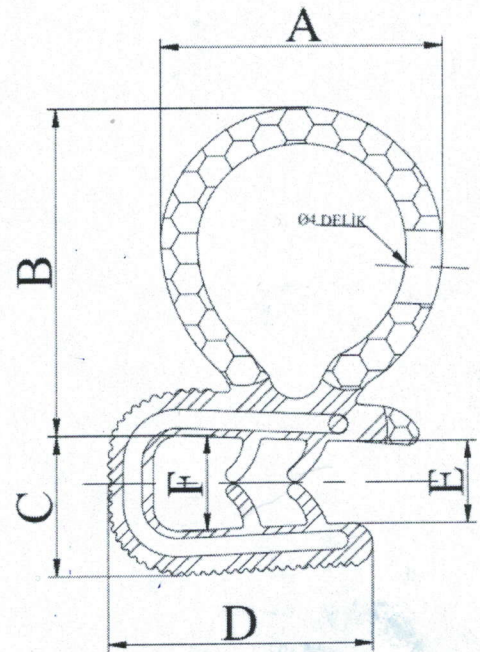

Note: Do not measure over Technical picture!

EXPLANATION :

Final Result

OK

Prepared By

Approval by