

Thermal Test LED

General information

Subject : VOLTANA 0 - 8 LEDs Oram 50 W driver
Created on : 08/11/2018
Validated on : 21/11/2018
Test number : D180791
Reference norm : IEC/EN 60598-1 Standard
Sample(s) : E180590
Folder : P-F16041

Test conditions

Luminaire : VOLTANA 0
Number of LED : 8


Driver : Optotronic OT50/120-277/1A2 2DIM LT2 P / 00-14-565
Driver info : Tc (max: 80°C)
Driver current (mA) : 1250
SPD : Vossloh Lighting Solutions SPC3 230/10 K

Measurements devices :
Fluke Norma 4000 - HF Powermeter - (E110) : Electrical measurements
Keithley 2701 (E097) – Ethernet Multimeter/Data Acquisition System :
Thermal & VF led measurements

Power Supply :
APT 300XAC AC power supply (E096)
Supply voltages: 230 V 50 Hz

Junction Temperature measurement method : Junction temperature
measurement by base temperature measurement and electrical
measurement. $T^{\circ}j = T^{\circ}b + R_{jb} \times P_{led}$

Operator : MESPOUILLE Loic

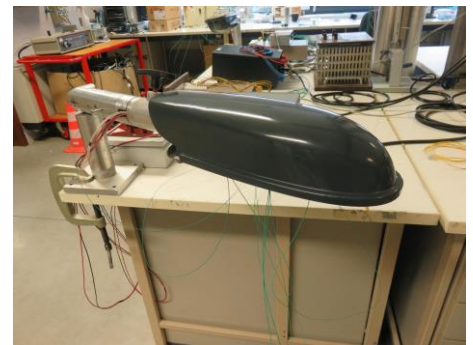

IMG_0885

Conclusion



Informative

Ta: 40°C limited by lenses and driver; according IEC 60598-2-3 and IEC 60598-2-5 (outdoor use only)
Ta: 30°C limited by lenses and driver; indoor use and UL standard
Tq: 15°C limited by lenses and driver; according IEC 62722-2-1
Tq given for 100 khrs of lifetime

Validated by :

GHYSENS Gilles

Duplicate to : BOS Peter

LAB : 22/11/2018

//CR180791

1/1

