



# TEST REPORT

Report No.: DHQA-ESH-P21010856B

Test Model: DH-IPC-HDW1530T-S6

Received: Jan.13, 2021

Issued: Feb.22, 2021

Applicant: ZHEJIANG DAHUA VISION TECHNOLOGY CO., LTD.

Address: No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China

Issued By: BUREAU VERITAS ADT (Shanghai) Corporation

Lab Location: No. 829, Xinzhuang Road, Shanghai, P.R.China  
(201612)

This test report consists of 73 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by A2LA, CNAS, or any government agency. The test results in the report only apply to the tested item. The test results in this report are traceable to the national or international standards.





# Contents

<b>1. TEST PROGRAM.....</b>	<b>4</b>
<b>2. Summary of Test Procedure and Test Results .....</b>	<b>5</b>
<b>3. Immunity Testing Performance Criteria Definition.....</b>	<b>8</b>
<b>4. Test Configuration of Equipment under Test .....</b>	<b>9</b>
4.1. Manufacturer Information .....	9
4.2. Feature of Equipment under Test.....	9
4.3. Description of Support Units.....	9
4.4. Measurement Uncertainty .....	10
<b>5. Test of Conducted Emission .....</b>	<b>11</b>
5.1. Test Limit .....	11
5.2. Test Procedures .....	13
5.3. Typical Test Setup .....	13
5.4. Measurement Equipment .....	14
5.5. Test Result and Data.....	15
5.6. Test Photographs .....	21
<b>6. Test of Radiated Emission .....</b>	<b>22</b>
6.1. Test Limit.....	22
6.2. Test Procedures .....	23
6.3. Typical Test Setup .....	23
6.4. Measurement Equipment .....	24
6.5. Test Result and Data (30MHz ~ 1GHz).....	25
6.6. Test Result and Data (1GHz ~ 6GHz).....	29
6.7. Test Photographs (30MHz ~ 1GHz) .....	33
6.8. Test Photographs (1GHz ~ 6GHz) .....	34
<b>7. Electrostatic Discharge Immunity Test.....</b>	<b>35</b>
7.1. Test Procedure.....	35
7.2. Test Setup for Tests Performed in Laboratory .....	36
7.3. Test Severity Levels .....	37
7.4. Measurement Equipment .....	37
7.5. Test Result and Data.....	38
7.6. Test Photographs .....	40
<b>8. Radio Frequency Electromagnetic Field Immunity Test .....</b>	<b>42</b>
8.1. Test Procedure.....	42
8.2. Test Severity Levels .....	42
8.3. Test Setup.....	43
8.4. Measurement Equipment .....	44
8.5. Test Result and Data.....	45
8.6. Test Photographs .....	47
<b>9. Electrical Fast Transient/ Burst Immunity Test .....</b>	<b>48</b>
9.1. Test Procedure.....	48
9.2. Test Severity Levels .....	48
9.3. Test Setup.....	49
9.4. Measurement Equipment .....	49
9.5. Test Result and Data.....	50



9.6. Test Photographs .....	52
<b>10. Surge Immunity Test.....</b>	<b>53</b>
10.1. Test Procedure.....	53
10.2. Test Severity Level .....	53
10.3. Test Setup.....	54
10.4. Measurement Equipment .....	54
10.5. Test Result and Data.....	55
10.6. Test Photographs .....	56
<b>11. Conduction Disturbances Induced by Radio-Frequency Fields.....</b>	<b>57</b>
11.1. Test Procedure.....	57
11.2. Test Severity Levels .....	57
11.3. Test Setup.....	58
11.4. Measurement Equipment .....	58
11.5. Test Result and Data.....	59
11.6. Test Photographs .....	61
<b>12. Power Frequency Magnetic Field Immunity Test .....</b>	<b>62</b>
12.1. Test Setup.....	62
12.2. Test Severity Levels .....	62
12.3. Measurement Equipment .....	63
12.4. Test Result and Data.....	64
12.5. Test Photographs .....	65
<b>13. Voltage Dips and Voltage Interruptions Immunity Test Setup.....</b>	<b>66</b>
13.1. Test Conditions .....	66
13.2. Test Setup.....	66
13.3. Measurement Equipment .....	66
13.4. Test Result and Data.....	67
13.5. Test Photographs .....	69
<b>14. Photographs of EUT .....</b>	<b>70</b>



## 1. TEST PROGRAM

**PRODUCT:** IP CAMERA

**TEST MODEL:** DH-IPC-HDW1530T-S6

**SERIES MODEL:** DH-IPC-HDW1530T-S6; DH-IPC-HDW1530TP-S6;  
DH-IPC-HDW1530TN-S6; DH-IPC-HDW1530T-0280B-S6;  
DH-IPC-HDW1530T-0360B-S6; IPC-HDW1530T-S6;  
IPC-HDW1530TP-S6; IPC-HDW1530TN-S6;  
IPC-HDW1530T-0280B-S6; IPC-HDW1530T-0360B-S6;  
DH-IPC-HDW1830T-S6; DH-IPC-HDW1830TP-S6;  
DH-IPC-HDW1830TN-S6; DH-IPC-HDW1830T-0280B-S6;  
DH-IPC-HDW1830T-0360B-S6; IPC-HDW1830T-S6;  
IPC-HDW1830TP-S6; IPC-HDW1830TN-S6;  
IPC-HDW1830T-0280B-S6; IPC-HDW1830T-0360B-S6

**APPLICANT:** ZHEJIANG DAHUA VISION TECHNOLOGY CO.,LTD.

**TESTED:** Jan.13, 2021 to Jan.30, 2021

**STANDARDS:** EN 55032: 2015+A11: 2020, Class B

EN IEC 61000-3-2: 2019

EN 61000-3-3: 2013+A1: 2019


EN 55024: 2010+A1: 2015

EN 55035: 2017

EN 50130-4: 2011+A1: 2014

We, BUREAU VERITAS ADT (Shanghai) Corporation, declare that the equipment above has been tested and found compliance with the requirement limits of applicable standards. The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate under the standards herein specified.

**PREPARED BY :**  , **DATE:** Feb.22, 2021  
Leon Yun



**APPROVED BY :**  , **DATE:** Feb.22, 2021  
Daniel Sun  
EMC Lab Manager



## 2. Summary of Test Procedure and Test Results

EMISSION		
Test Item	Normative References	Test Result
Conducted Emission	EN 55032: 2015+A11: 2020	Meets the Class B requirements
Radiated Emission	EN 55032: 2015+A11: 2020	Meets the Class B requirements
Harmonic current emissions	EN IEC 61000-3-2: 2019	The rated input power of the EUT is less than 75W, the limits are not specified by this standard.
Voltage fluctuations & flicker	EN 61000-3-3: 2013+A1: 2019	The EUT does not produce significant voltage fluctuations or flicker.

IMMUNITY (EN 55024:2010+A1:2015)		
Test Item	Test Spec	Test Result
Electrostatic Discharge Immunity Test (ESD)	$\pm 4$ kV (contact discharge, HCP/VCP) $\pm 8$ kV (Air discharge)	Meets the requirements of Performance Criterion A
Radio Frequency electromagnetic field immunity test (RS)	80-1000 MHz, 3 V/m, 80% AM(1 kHz)	Meets the requirements of Performance Criterion A
Electrical Fast Transient/ Burst Immunity Test (EFT)	AC Port: $\pm 1$ kV, Signal Port: $\pm 0.5$ kV	Meets the requirements of Performance Criterion A
Surge Immunity Test	AC Power Ports: Line to Line: $\pm 1$ kV Line to earth: $\pm 2$ kV	Meets the requirements of Performance Criterion A
Conduction Disturbances induced by Radio-Frequency Fields	0.15-80 MHz, 3 V, 80% AM(1 kHz)	Meets the requirements of Performance Criterion A
Power Frequency Magnetic Field Immunity Test	50 Hz, 1 A/m	Meets the requirements of Performance Criterion A
Voltage Dips and Voltage Interruptions Immunity Test	Voltage dips: $>95\%$ Reduction, 0.5 Durations (Cycle)	Meets the requirements of Performance Criterion A
	30% Reduction, 25 Durations (Cycle)	Meets the requirements of Performance Criterion A
	Voltage interruptions: $>95\%$ Reduction, 250 Durations (Cycle)	Meets the requirements of Performance Criterion C



IMMUNITY (EN 55035:2017)		
Test Item	Test Spec	Test Result
Electrostatic Discharge Immunity Test (ESD)	$\pm 4$ kV (contact discharge, HCP/VCP) $\pm 8$ kV (Air discharge)	Meets the requirements of Performance Criterion A
Radio Frequency electromagnetic field immunity test (RS)	80-1000 MHz, 3 V/m, 80% AM(1 kHz) 1800, 2600, 3500, 5000 MHz	Meets the requirements of Performance Criterion A
Electrical Fast Transient/ Burst Immunity Test (EFT)	AC Port: $\pm 1$ kV, Signal Port: $\pm 0.5$ kV	Meets the requirements of Performance Criterion A
Surge Immunity Test	AC Power Ports: Line to Line: $\pm 1$ kV Line to earth: $\pm 2$ kV	Meets the requirements of Performance Criterion A
Conduction Disturbances induced by Radio-Frequency Fields	0.15-10 MHz, 3 V; 10-30 MHz, 3-1 V 30-80 MHz, 1 V 80% AM(1 kHz)	Meets the requirements of Performance Criterion A
Power Frequency Magnetic Field Immunity Test	50 Hz, 1 A/m	Meets the requirements of Performance Criterion A
Voltage Dips and Voltage Interruptions Immunity Test	Voltage dips: $>95\%$ Reduction, 0.5 Durations (Cycle)	Meets the requirements of Performance Criterion A
	30% Reduction, 25 Durations (Cycle)	Meets the requirements of Performance Criterion A
	Voltage interruptions: $>95\%$ Reduction, 250 Durations (Cycle)	Meets the requirements of Performance Criterion C



IMMUNITY (EN 50130-4: 2011+A1: 2014)		
Test Item	Test Spec	Test Result
EN 61000-4-11 Mains supply voltage variations	Unom+10%(supply voltage max) Unom-15%(supply voltage min)	Meets the requirements of Performance Criterion A
EN 61000-4-11 Mains supply voltage dips and short interruptions	Voltage dips: 20% Reduction, 250 Durations (Cycle) 30% Reduction, 25 Durations (Cycle) 60% Reduction, 10 Durations (Cycle)	Meets the requirements of Performance Criterion A
	Voltage interruptions: 100% Reduction, 250 Durations (Cycle)	Meets the requirements of Performance Criterion C
EN 61000-4-2 Electrostatic Discharge Immunity Test (ESD)	+6 kV (contact discharge, HCP/VCP) +8 kV (Air discharge)	Meets the requirements of Performance Criterion A
EN 61000-4-3 Radio Frequency electromagnetic field immunity test (RS)	80-2700 MHz, 10 V/m, 80%AM(1KHz) 80-2700 MHz, 10 V/m, 1 Hz(0.5 s ON, 0.5 s OFF)	Meets the requirements of Performance Criterion A
EN 61000-4-6 Conduction Disturbances induced by Radio-Frequency Fields	0.15-100 MHz, 10 V, 80% AM(1 kHz) 0.15-100 MHz, 10 V, 1 Hz(0.5 s ON, 0.5 s OFF)	Meets the requirements of Performance Criterion A
EN 61000-4-4 Electrical Fast Transient/ Burst Immunity Test (EFT)	Pulse: 5/50 ns, Repetition Rate: 100 kHz Power line: $\pm 2$ kV Signal line: $\pm 1$ kV	Meets the requirements of Performance Criterion A
EN 61000-4-5 Surge Immunity Test	Waveform: 1.2/50 $\mu$ s(8/20 $\mu$ s) Line to Line: $\pm 1$ kV Line to earth: $\pm 2$ kV	Meets the requirements of Performance Criterion A



### 3. Immunity Testing Performance Criteria Definition

Criterion A : The apparatus operate as intended during the test. No degradation of performance or loss of function is allowed below the performance level.

Criterion B : The apparatus operate as intended after the test. No change of operating state and the stored data are allowed. During the test, degradation of performance is allowed.

Criterion C : Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.



## 4. Test Configuration of Equipment under Test

### 4.1. Manufacturer Information

Manufacturer : ZHEJIANG DAHUA VISION TECHNOLOGY CO.,LTD.

Address : No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China

### 4.2. Feature of Equipment under Test

<b>Product Name:</b>	IP CAMERA
<b>Test Model:</b>	DH-IPC-HDW1530T-S6
<b>Series Model:</b>	DH-IPC-HDW1530T-S6; DH-IPC-HDW1530TP-S6; DH-IPC-HDW1530TN-S6; DH-IPC-HDW1530T-0280B-S6; DH-IPC-HDW1530T-0360B-S6; IPC-HDW1530T-S6; IPC-HDW1530TP-S6; IPC-HDW1530TN-S6; IPC-HDW1530T-0280B-S6; IPC-HDW1530T-0360B-S6; DH-IPC-HDW1830T-S6; DH-IPC-HDW1830TP-S6; DH-IPC-HDW1830TN-S6; DH-IPC-HDW1830T-0280B-S6; DH-IPC-HDW1830T-0360B-S6; IPC-HDW1830T-S6; IPC-HDW1830TP-S6; IPC-HDW1830TN-S6; IPC-HDW1830T-0280B-S6; IPC-HDW1830T-0360B-S6
<b>Model Discrepancy:</b>	All models have same internal structure, just different model names.
<b>EUT Power Rating:</b>	DC12V, 0.5A; POE(802.3af)

Note: Please refer to user manual.

### 4.3. Description of Support Units

NO.	PRODUCT	BRAND	MODEL NO.
1	PC	Lenovo	L470
2	AC adapter	HONOR	ADS-12AM-12 12012EPCN
3	POE injector	TP-LINK	TL-POE150S
4	Cable	--	--



#### 4.4. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2 Ed 1.0.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

This lab's measurement uncertainty ULab, is low than UCispr, Table 1 – Values of UCispr of CISPR 16-4-2 Ed. 1.0, therefore compliance is deemed to occur if no measured disturbance exceeds the disturbance limit.

Measurement	Value
Conducted emissions	2.55 dB
Conducted emissions at telecom port	2.60 dB
Radiated emissions	30 MHz ~ 1 GHz
	Above 1 GHz
	3.22 dB
	2.89 dB



## 5. Test of Conducted Emission

### 5.1. Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 kHz and return leads of the EUT according to the methods defined in European Standard EN 55032.

Table A.10 – Requirements for conducted emissions from the AC mains power ports of Class B equipment

Applicable to 1. AC mains power ports (3.1.1)				
Table clause	Frequency range MHz	Coupling device (see Table A.8)	Detector type / bandwidth	Class B limits dB(uV)
A10.1	0,15 to 0,5	AMN	Quasi Peak / 9 kHz	66 to 56
	0,5 to 5			56
	5 to 30			60
A10.2	0,15 to 0,5	AMN	Average / 9 kHz	56 to 46
	0,5 to 5			46
	5 to 30			50

Apply A10.1 and A10.2 across the entire frequency range.




Table A.12 –Requirements for asymmetric mode conducted emissions from Class B equipment

Applicable to					
Table clause	Frequency range MHz	Coupling device (see Table A.8)	Detector type / bandwidth	Class B voltage limits dB(uV)	Class B current limits dB(uA)
A12.1	0,15 to 0,5	AAN	Quasi Peak / 9 kHz	84 to 74	n/a
	0,5 to 30			74	
	0,15 to 0,5	AAN	Average / 9 kHz	74 to 64	
	0,5 to 30			64	
A12.2	0,15 to 0,5	CVP and current probe	Quasi Peak / 9 kHz	84 to 74	40 to 30
	0,5 to 30			74	30
	0,15 to 0,5	CVP and current probe	Average / 9 kHz	74 to 64	30 to 20
	0,5 to 30			64	20
A12.3	0,15 to 0,5	Current Probe	Quasi Peak / 9 kHz	n/a	40 to 30
	0,5 to 30				30
	0,15 to 0,5	Current Probe	Average / 9 kHz	n/a	30 to 20
	0,5 to 30				20
<p>The choice of coupling device and measurement procedure is defined in Annex C.</p> <p>Screened ports including TV broadcast receiver tuner ports are measured with a common-mode impedance of <math>150 \Omega</math>. This is typically accomplished with the screen terminated by <math>150 \Omega</math> to earth.</p> <p>AC mains ports that also have the function of a wired network port shall meet the limits given in Table A.10.</p> <p>The measurement shall cover the entire frequency range.</p> <p>The application of the voltage and/or current limits is dependent on the measurement procedure used. Refer to Table C.1 for applicability.</p> <p>Measurement is required at only one EUT supply voltage and frequency.</p> <p>Applicable to ports listed above and intended to connect to cables longer than 3 m.</p>					

## 5.2. Test Procedures

- a. The EUT was placed on a desk 0.8 meter height from the metal ground plane and 0.4 meter from the conducting wall of the shielding room and it was kept at least 0.8 meter from any other grounded conducting surface.
- b. Connect EUT to the power mains through a Artificial Mains Network (AMN).
- c. All the support units are connecting to the other AMN.
- d. The AMN provides 50 ohm coupling impedance for the measuring instrument.
- e. The CISPR states that a 50 ohm, 50 micro-Henry AMN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

## 5.3. Typical Test Setup

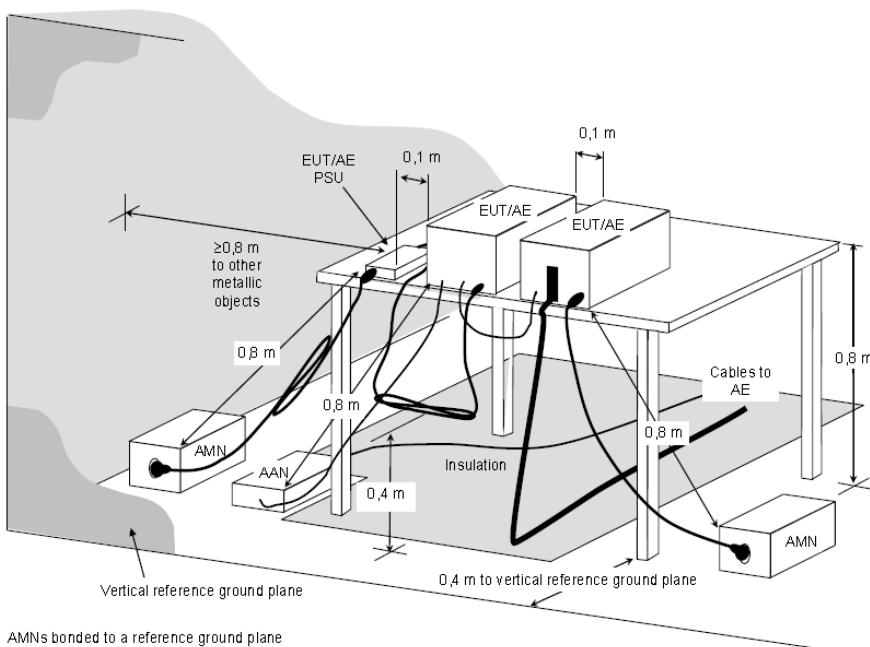

**NOTE** The 0,8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be ≥0,8 m.

**Figure D.2 – Example measurement arrangement for table-top EUT  
(Conducted emission measurement – alternative 1)**



#### 5.4. Measurement Equipment

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	E1R1002	May.11, 2021
LISN ROHDE & SCHWARZ	ENV216	E1L1011	May.11, 2021
LISN	ISNT800	E1C4021	May.11, 2021
Software ADT	ADT_Cond_V7.3.0	N/A	N/A




## 5.5. Test Result and Data

### 5.5.1 Conducted Emission Test Data

For DC12V port test on AC adapter

Phase : LINE

Location: Conduction 1      Date: 1/29/2021      Time: 1:17:45 PM      Phase L1  
 Temperatuer (C): 23      Humidity (%): 53      Approved by:

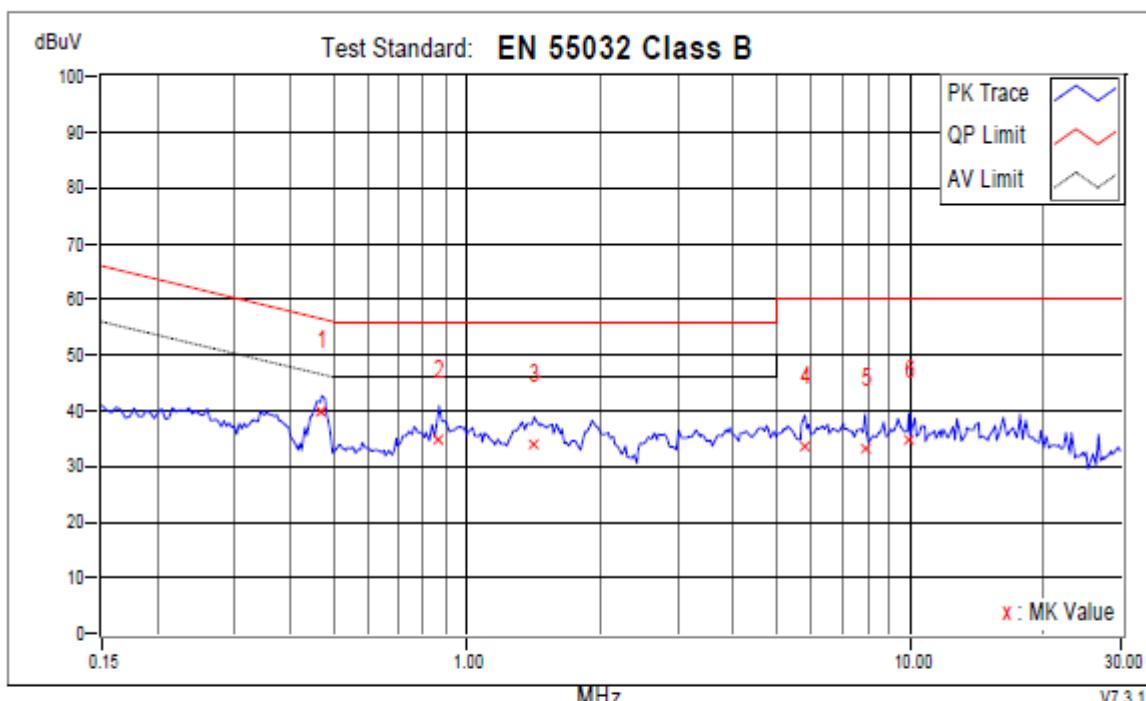

No.	Frequency MHz	Corr. Factor dB	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
			QP	AV	QP	AV	QP	AV	QP	AV	
+1	0.47062	9.74	29.94	23.47	39.68	33.21	56.50	46.50	-16.83	-13.30	
2	0.86553	9.60	24.98	18.41	34.58	28.01	56.00	46.00	-21.42	-17.99	
3	1.41837	9.68	24.17	16.83	33.85	26.51	56.00	46.00	-22.15	-19.49	
4	5.78584	9.87	23.89	14.50	33.76	24.37	60.00	50.00	-26.24	-25.63	
5	7.92070	9.97	23.42	14.96	33.39	24.93	60.00	50.00	-26.61	-25.07	
6	9.93826	10.21	24.67	17.39	34.88	27.60	60.00	50.00	-25.12	-22.40	

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.



Phase : NEUTRAL

Location: Conduction 1

Date: 1/29/2021


Time: 1:21:22 PM

Phase N

Temperatuer (C): 23

Humidity (%): 53

Approved by:

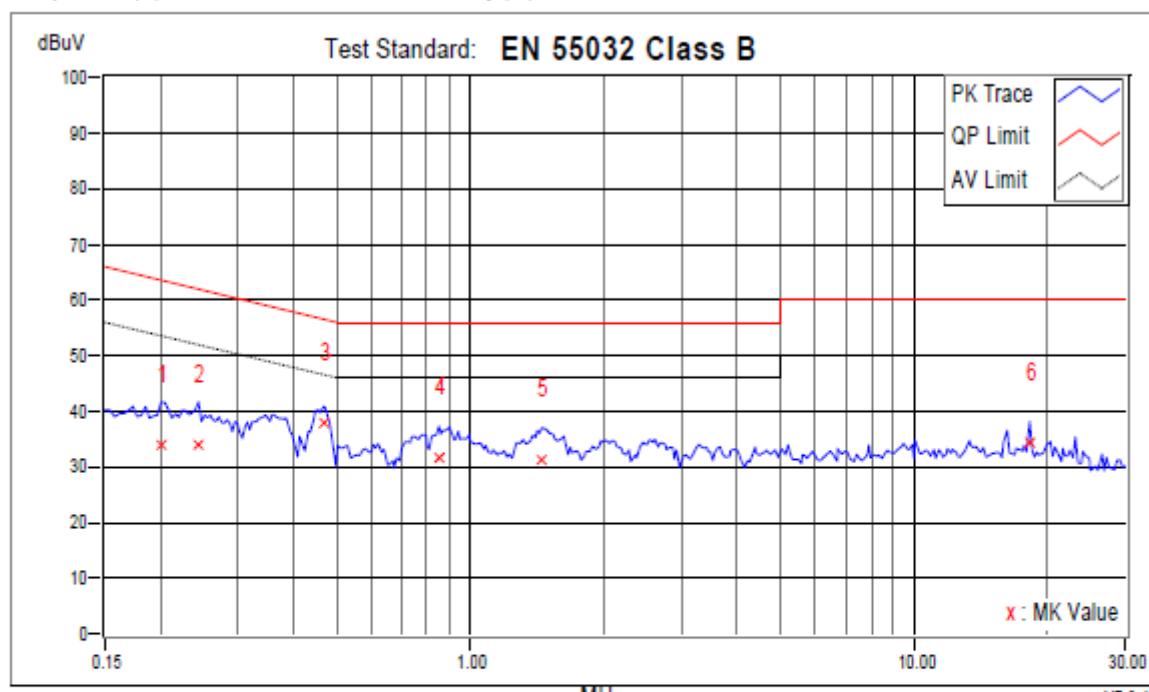

No.	Frequency	Corr. Factor	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
	MHz	dB	QP	AV	QP	AV	QP	AV	QP	AV	
1	0.20083	9.82	24.13	13.20	33.95	23.02	63.58	53.58	-29.63	-30.56	
2	0.24384	9.85	24.16	15.97	34.01	25.82	61.96	51.96	-27.95	-26.14	
+3	0.46671	9.86	28.21	23.09	38.07	32.95	56.57	46.57	-18.50	-13.62	
4	0.84989	9.90	21.84	16.03	31.74	25.93	56.00	46.00	-24.26	-20.07	
5	1.44965	9.92	21.39	15.87	31.31	25.79	56.00	46.00	-24.69	-20.21	
6	18.24228	10.17	24.13	19.85	34.30	30.02	60.00	50.00	-25.70	-19.98	


#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.



## LAN Port

Location: Conduction 1 Date: 1/29/2021 Time: 1:27:26 PM Phase Factor  
 Temperatuer (C): 23 Humidity (%): 53 Approved by:

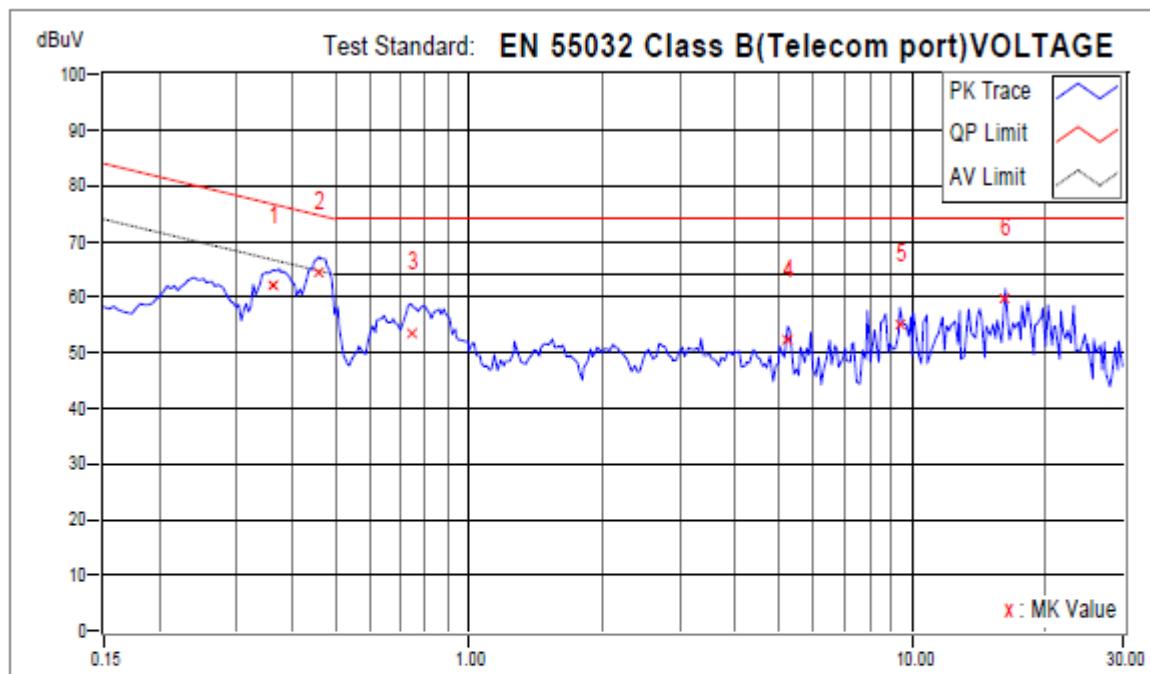

MHz

V7.3.1

No.	Frequency	Corr. Factor	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
	MHz	dB	QP	AV	QP	AV	QP	AV	QP	AV	
1	0.36114	9.84	52.18	45.67	62.02	55.51	76.70	66.70	-14.68	-11.19	
2	0.45889	9.76	54.51	47.95	64.27	57.71	74.71	64.71	-10.44	-7.00	
3	0.74041	9.68	43.90	35.64	53.58	45.32	74.00	64.00	-20.42	-18.68	
4	5.23844	9.54	42.64	39.57	52.18	49.11	74.00	64.00	-21.82	-14.89	
5	9.38695	9.53	45.40	42.10	54.93	51.63	74.00	64.00	-19.07	-12.37	
+6	16.22863	9.74	50.16	47.48	59.90	57.22	74.00	64.00	-14.10	-6.78	

## REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.



BUREAU  
VERITAS

For POE port test on POE adapter

Phase : LINE

Location: Conduction 1

Date: 1/29/2021


Time: 3:03:34 PM

Phase L1

Temperatuer (C): 23

Humidity (%): 53

Approved by:

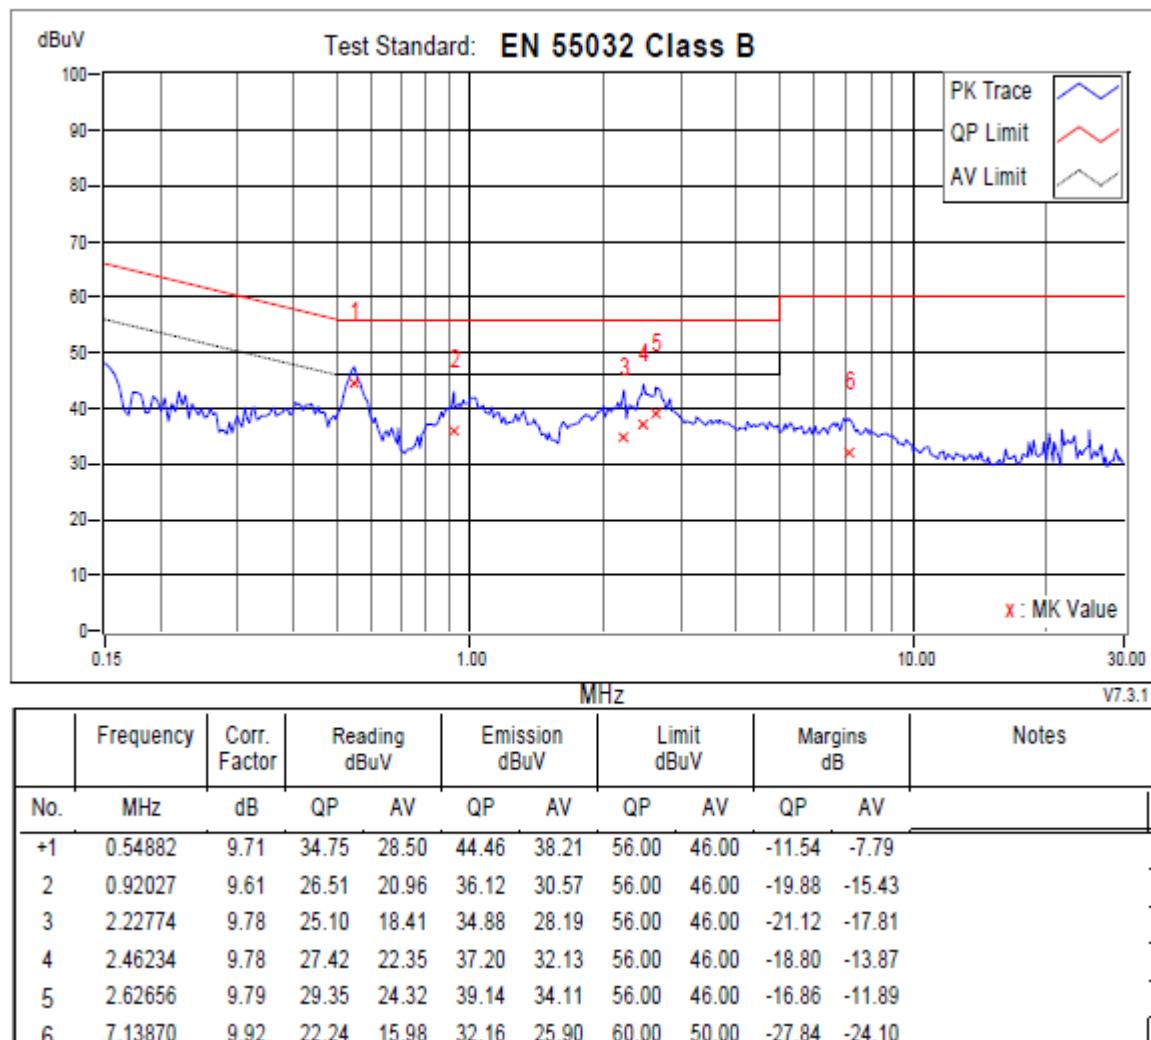

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.



BUREAU  
VERITAS

Phase : NEUTRAL

Location: Conduction 1

Date: 1/29/2021


Time: 3:00:39 PM

Phase N

Temperatur (C): 23

Humidity (%): 53

Approved by:

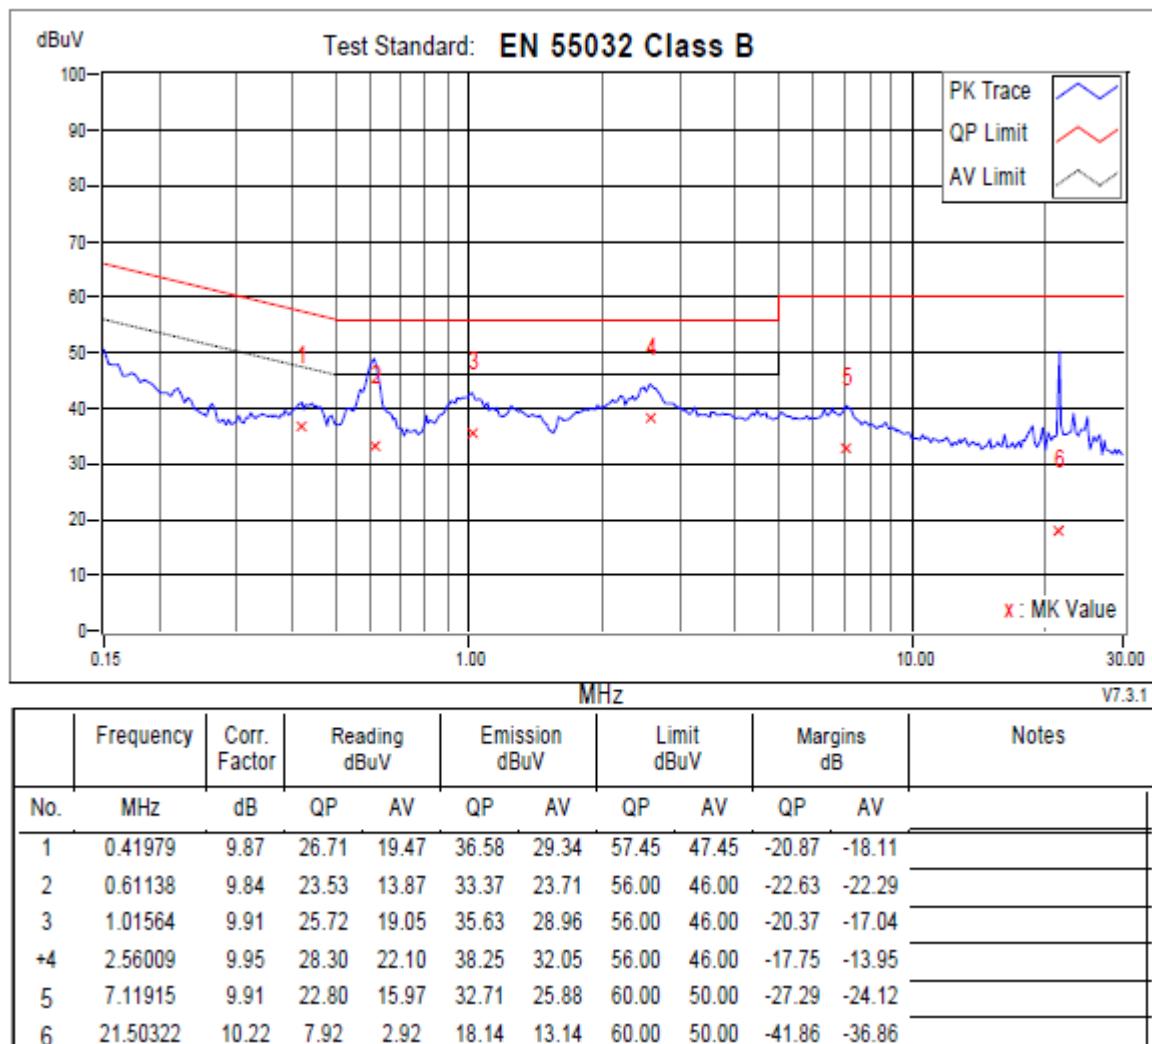


**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.



## LAN Port

Location: Conduction 1      Date: 1/29/2021      Time: 3:07:10 PM      Phase Factor  
 Temperatur (C): 23      Humidity (%): 53      Approved by:

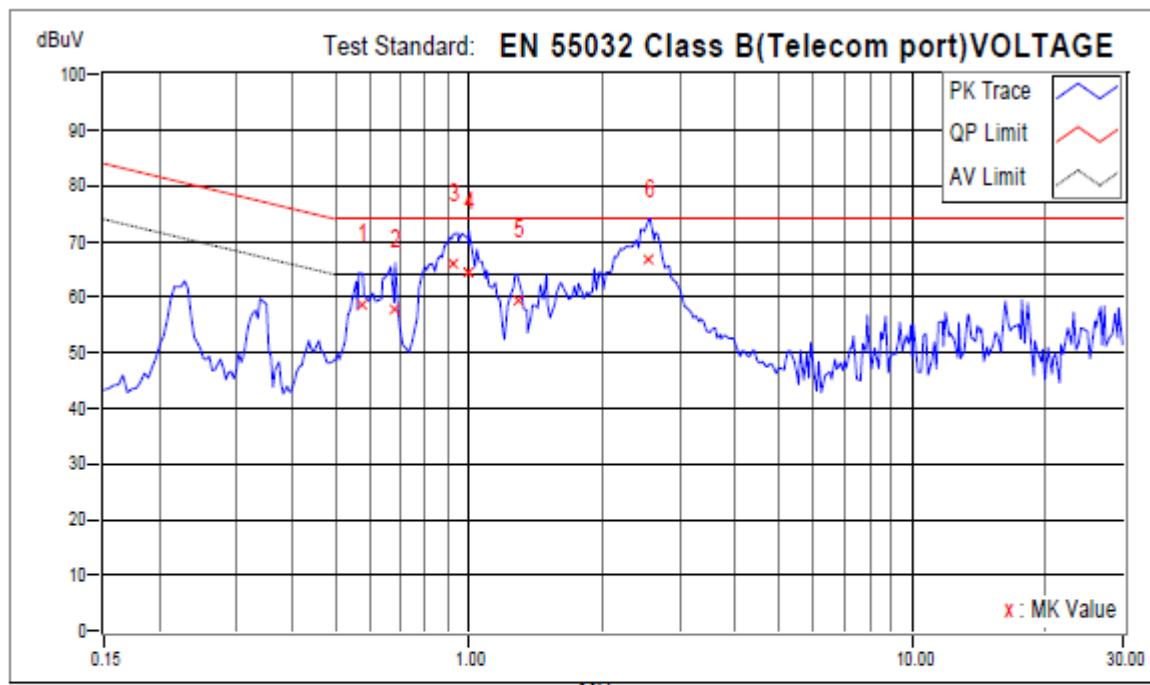

V7.3.1

No.	Frequency	Corr. Factor	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
	MHz	dB	QP	AV	QP	AV	QP	AV	QP	AV	
1	0.57619	9.71	49.02	42.65	58.73	52.36	74.00	64.00	-15.27	-11.64	-
2	0.68176	9.69	48.28	40.00	57.97	49.69	74.00	64.00	-16.03	-14.31	-
3	0.92418	9.65	56.23	51.19	65.88	60.84	74.00	64.00	-8.12	-3.16	-
4	1.00000	9.63	54.63	47.63	64.26	57.26	74.00	64.00	-9.74	-6.74	-
5	1.28543	9.62	49.72	44.41	59.34	54.03	74.00	64.00	-14.66	-9.97	-
+6	2.54836	9.56	57.30	51.76	66.86	61.32	74.00	64.00	-7.14	-2.68	-

## REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.



BUREAU  
VERITAS

## 5.6. Test Photographs





## 6. Test of Radiated Emission

### 6.1. Test Limit

The EUT shall meet the limits of below Table when measured at the measuring distance R in accordance with the methods described in European Standard EN 55032. If the reading on the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the highest reading shall be recorded, with the exception of any brief isolated high reading, which shall be ignored.

Table A.4 – Requirements for radiated emissions at frequencies up to 1 GHz for class B equipment

Table clause	Frequency range MHz	Measurement			Class B limits dB(uV/m)	
		Facility (see Table A.1)	Distance m	Detector type / bandwidth		
A4.1	30 to 230	OATS/SAC	10	Quasi Peak / 120 kHz	30	
	230 to 1000				37	
A4.2	30 to 230	OATS/SAC	3		40	
	230 to 1000				47	
A4.3	30 to 230	FAR	10		32 to 25	
	230 to 1000				32	
A4.4	30 to 230	FAR	3		42 to 35	
	230 to 1000				42	

Apply only A4.1 or A4.2 or A4.3 or A4.4 across the entire frequency range.  
These requirements are not applicable to the local oscillator and harmonics frequencies of equipment covered by Table A.6.

Table A.5 – Requirements for radiated emissions at frequencies above 1 GHz for class B equipment


Table clause	Frequency range MHz	Measurement			Class B limits dB(uV/m)
		Facility (see Table A.1)	Distance m	Detector type / bandwidth	
A5.1	1000-3000	FSOATS	3	Average / 1 MHz	50
	3000-6000				54
A5.2	1000-3000	FSOATS	3	Peak / 1 MHz	70
	3000-6000				74

Apply A5.1 and A5.2 across the frequency range from 1 000 MHz to the highest required frequency of measurement derived from Table 1.

## 6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3/10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.

## 6.3. Typical Test Setup

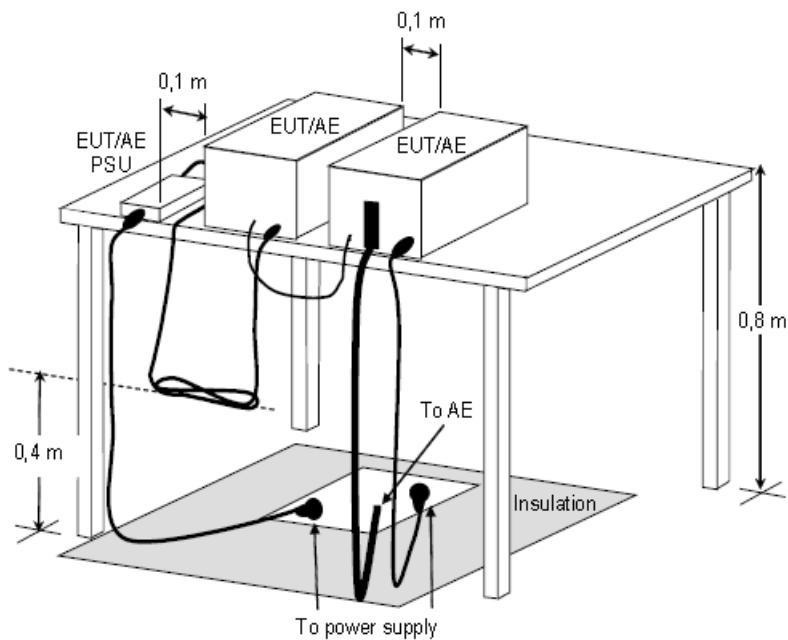

**Figure D.8 – Example measurement arrangement for table-top EUT  
(Radiated emission measurement)**



## 6.4. Measurement Equipment


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
EMI Test Spectrum ROHDE & SCHWARZ	ESR7	E1R1005	May.11, 2021
Spectrum Analyzer Keysight	N9030B	E1S1003	Sep.08, 2021
Broad-Band Antenna Schwarzbeck	VULB9168	E1A1012	Jul.28, 2021
Double Riaged Vroadband Horn Antenna Schwarzbeck	BBHA9120D	E1A1017	Jan.26, 2021
Preamplifier Agilent	8447D	E1A2001	Apr.19, 2021
Preamplifier Agilent	EMC051845SE	E1A2009	Jul.05, 2021



## 6.5. Test Result and Data (30MHz ~ 1GHz)

For DC12V port test on AC adapter

Position: Horizontal

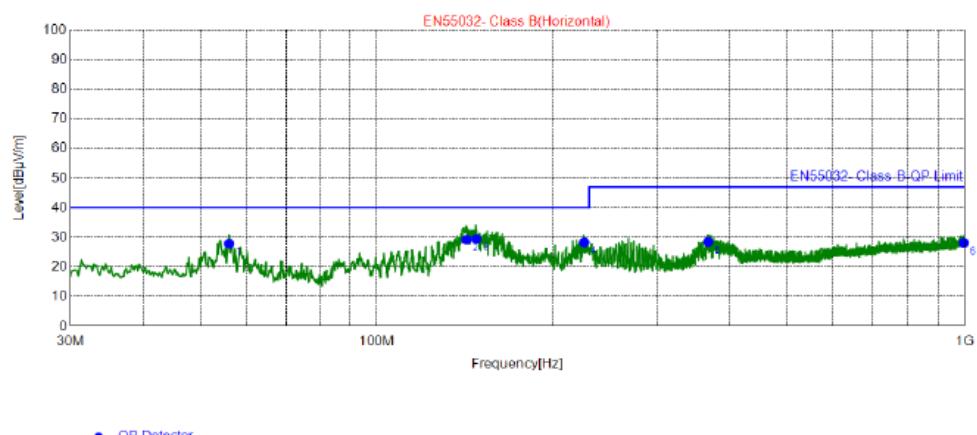


Final Data List									
NO.	Freq. [MHz]	QP Reading [dB μV/m]	Factor [dB]	QP Value [dB μV/m]	QP Limit [dB μV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	55.99	37.98	-10.05	27.93	40.00	12.07	200	354	Horizontal
2	142.1	39.44	-10.27	29.17	40.00	10.83	200	190	Horizontal
3	147.7	39.54	-10.10	29.44	40.00	10.56	200	224	Horizontal
4	225.7	39.87	-11.55	28.32	40.00	11.68	100	226	Horizontal
5	367.1	35.49	-6.99	28.50	47.00	18.50	100	328	Horizontal
6	995.7	25.91	2.30	28.21	47.00	18.79	100	316	Horizontal

### REMARKS:

1. Q.P. is abbreviation of quasi-peak individually.
2. The emission levels of other frequencies were very low against the limit.
3. QP Margin value = QP Limit value – QP value
4. Factor = Antenna Factor + Amplifier Factor + Cable loss
5. QP value = Factor + Reading Value.



Position: Vertical

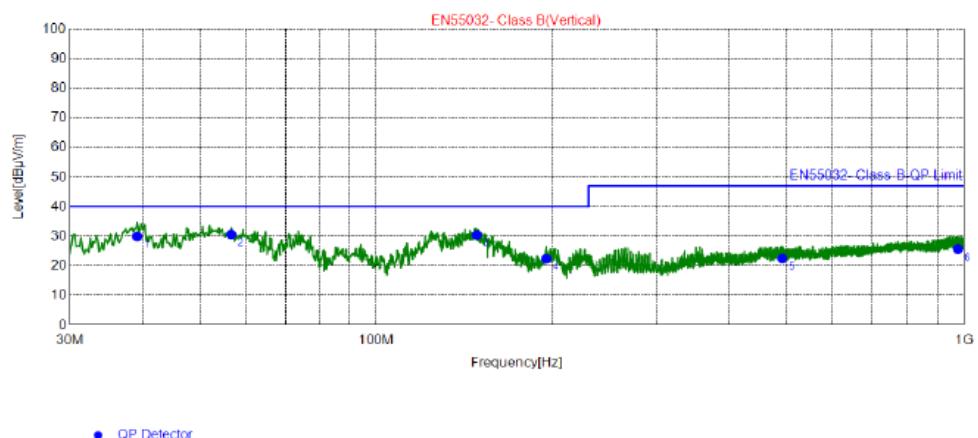

Final Data List									
NO.	Freq. [MHz]	QP Reading [dB $\mu$ V/m]	Factor [dB]	QP Value [dB $\mu$ V/m]	QP Limit [dB $\mu$ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	39.11	40.51	-10.54	29.97	40.00	10.03	100	276	Vertical
2	56.57	40.74	-10.08	30.66	40.00	9.34	100	276	Vertical
3	148.3	40.59	-10.09	30.50	40.00	9.50	100	149	Vertical
4	194.9	34.27	-11.81	22.46	40.00	17.54	100	205	Vertical
5	492.3	27.18	-4.63	22.55	47.00	24.45	100	182	Vertical
6	975.3	23.6	2.14	25.74	47.00	21.26	200	347	Vertical


#### REMARKS:

1. Q.P. is abbreviation of quasi-peak individually.
2. The emission levels of other frequencies were very low against the limit.
3. QP Margin value = QP Limit value – QP value
4. Factor = Antenna Factor + Amplifier Factor + Cable loss
5. QP value = Factor + Reading Value.



For POE port test on POE adapter

Position: Horizontal

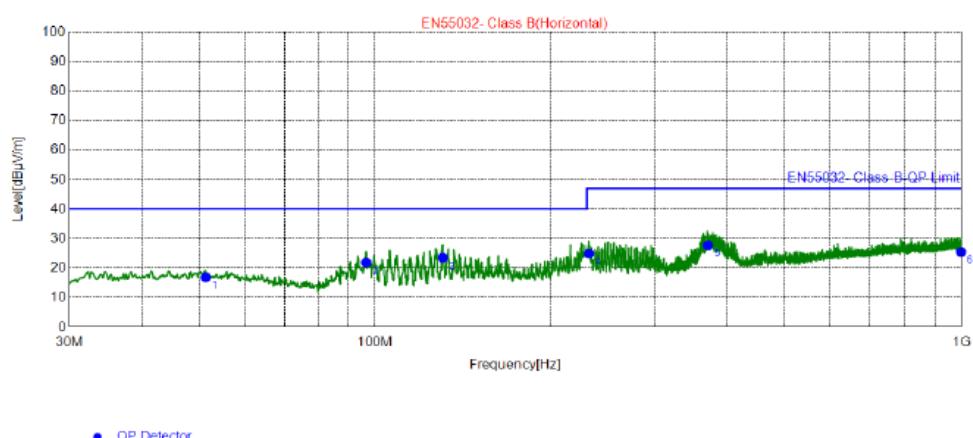


Final Data List									
NO.	Freq. [MHz]	QP Reading [dB μV/m]	Factor [dB]	QP Value [dB μV/m]	QP Limit [dB μV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	51.34	26.63	-9.78	16.85	40.00	23.15	100	209	Horizontal
2	96.54	37.18	-15.29	21.89	40.00	18.11	200	265	Horizontal
3	130.4	34.9	-11.36	23.54	40.00	16.46	200	258	Horizontal
4	231.9	36.32	-11.34	24.98	47.00	22.02	100	246	Horizontal
5	370.6	34.67	-6.89	27.78	47.00	19.22	100	338	Horizontal
6	997.6	23.22	2.31	25.53	47.00	21.47	100	309	Horizontal

#### REMARKS:

1. Q.P. is abbreviation of quasi-peak individually.
2. The emission levels of other frequencies were very low against the limit.
3. QP Margin value = QP Limit value – QP value
4. Factor = Antenna Factor + Amplifier Factor + Cable loss
5. QP value = Factor + Reading Value.



Position: Vertical

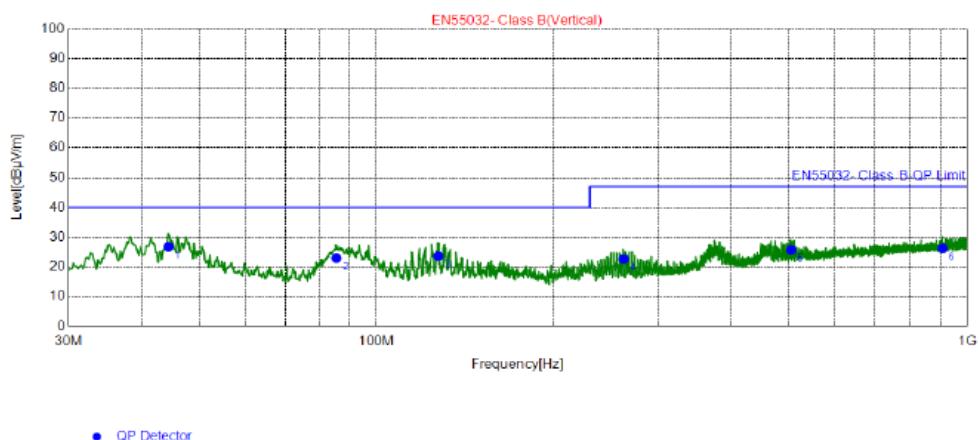

Final Data List									
NO.	Freq. [MHz]	QP Reading [dB $\mu$ V/m]	Factor [dB]	QP Value [dB $\mu$ V/m]	QP Limit [dB $\mu$ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	44.35	36.98	-10.11	26.87	40.00	13.13	100	191	Vertical
2	85.48	38.15	-15.19	22.96	40.00	17.04	100	195	Vertical
3	127.3	35.34	-11.70	23.64	40.00	16.36	100	228	Vertical
4	262.6	32.56	-9.97	22.59	47.00	24.41	200	302	Vertical
5	505.3	30.17	-4.45	25.72	47.00	21.28	100	187	Vertical
6	907.6	25.27	1.03	26.30	47.00	20.70	100	187	Vertical

#### REMARKS:

1. Q.P. is abbreviation of quasi-peak individually.
2. The emission levels of other frequencies were very low against the limit.
3. QP Margin value = QP Limit value – QP value
4. Factor = Antenna Factor + Amplifier Factor + Cable loss
5. QP value = Factor + Reading Value.




BUREAU  
VERITAS

## 6.6. Test Result and Data (1GHz ~ 6GHz)

For DC12V port test on AC adapter

Position: Horizontal

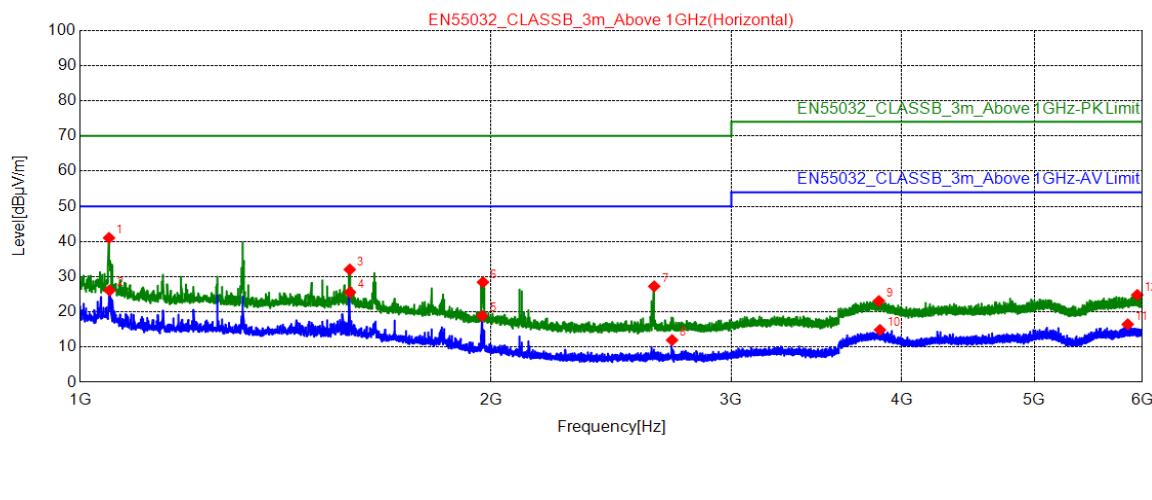


NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	1050.0000	60.80	41.03	70.00	28.97	100	63	Horizontal	PK
2	1051.0000	45.87	26.11	50.00	23.89	100	63	Horizontal	AV
3	1576.0000	50.17	32.06	70.00	37.94	200	226	Horizontal	PK
4	1576.5000	43.70	25.59	50.00	24.41	200	226	Horizontal	AV
5	1970.5000	35.81	18.87	50.00	31.13	200	298	Horizontal	AV
6	1973.0000	45.39	28.45	70.00	41.55	200	298	Horizontal	PK
7	2634.0000	42.23	27.27	70.00	42.73	200	100	Horizontal	PK
8	2714.5000	26.71	12.00	50.00	38.00	200	215	Horizontal	AV
9	3848.0000	34.99	23.10	74.00	50.90	200	163	Horizontal	PK
10	3855.0000	26.77	14.89	54.00	39.11	100	178	Horizontal	AV
11	5855.5000	25.09	16.47	54.00	37.53	100	250	Horizontal	AV
12	5950.0000	33.34	24.83	74.00	49.17	100	240	Horizontal	PK

### REMARKS:

1. The emission levels of other frequencies were very low against the limit.
2. Margin = Limit - Level



Position: Vertical

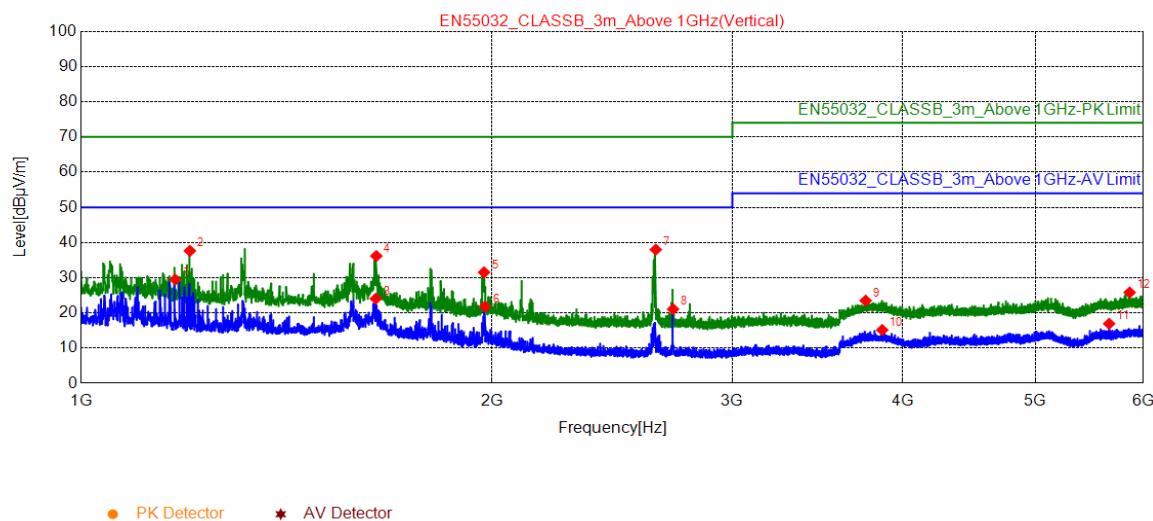

NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	1172.0000	48.87	29.50	50.00	20.50	100	328	Vertical	AV
2	1201.5000	56.91	37.64	70.00	32.36	100	349	Vertical	PK
3	1644.0000	41.95	24.05	50.00	25.95	100	256	Vertical	AV
4	1645.5000	54.07	36.18	70.00	33.82	200	146	Vertical	PK
5	1973.5000	48.47	31.54	70.00	38.46	200	12	Vertical	PK
6	1977.0000	38.76	21.84	50.00	28.16	100	328	Vertical	AV
7	2636.5000	52.96	38.01	70.00	31.99	200	2	Vertical	PK
8	2714.5000	35.79	21.08	50.00	28.92	200	54	Vertical	AV
9	3757.0000	35.59	23.49	74.00	50.51	200	2	Vertical	PK
10	3863.5000	27.02	15.16	54.00	38.84	100	246	Vertical	AV
11	5664.5000	26.05	16.93	54.00	37.07	100	297	Vertical	AV
12	5864.5000	34.43	25.82	74.00	48.18	200	116	Vertical	PK


#### REMARKS:

1. The emission levels of other frequencies were very low against the limit.
2. Margin = Limit - Level



For POE port test on POE adapter

Position: Horizontal

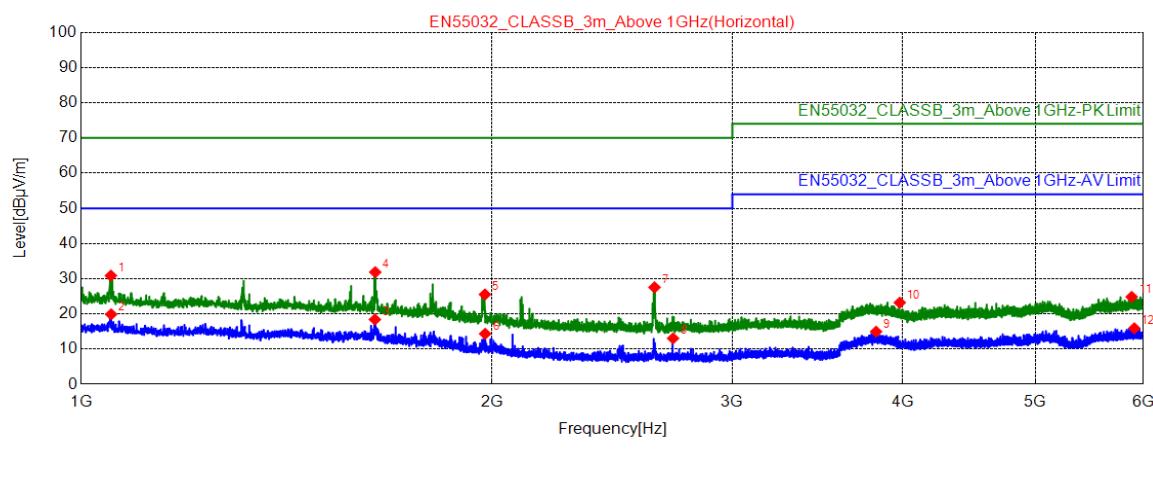


NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	1051.5000	50.63	30.87	70.00	39.13	200	271	Horizontal	PK
2	1052.0000	39.65	19.89	50.00	30.11	200	208	Horizontal	AV
3	1641.5000	36.33	18.42	50.00	31.58	200	229	Horizontal	AV
4	1642.5000	49.76	31.86	70.00	38.14	200	52	Horizontal	PK
5	1976.5000	42.46	25.53	70.00	44.47	200	291	Horizontal	PK
6	1977.0000	31.27	14.35	50.00	35.65	200	291	Horizontal	AV
7	2631.0000	42.52	27.55	70.00	42.45	200	281	Horizontal	PK
8	2714.5000	27.77	13.06	50.00	36.94	200	281	Horizontal	AV
9	3823.5000	26.91	14.96	54.00	39.04	200	323	Horizontal	AV
10	3979.0000	34.80	23.21	74.00	50.79	200	219	Horizontal	PK
11	5884.5000	33.42	24.84	74.00	49.16	200	52	Horizontal	PK
12	5910.5000	24.45	15.90	54.00	38.10	200	1	Horizontal	AV

#### REMARKS:

1. The emission levels of other frequencies were very low against the limit.
2. Margin = Limit - Level

Position: Vertical

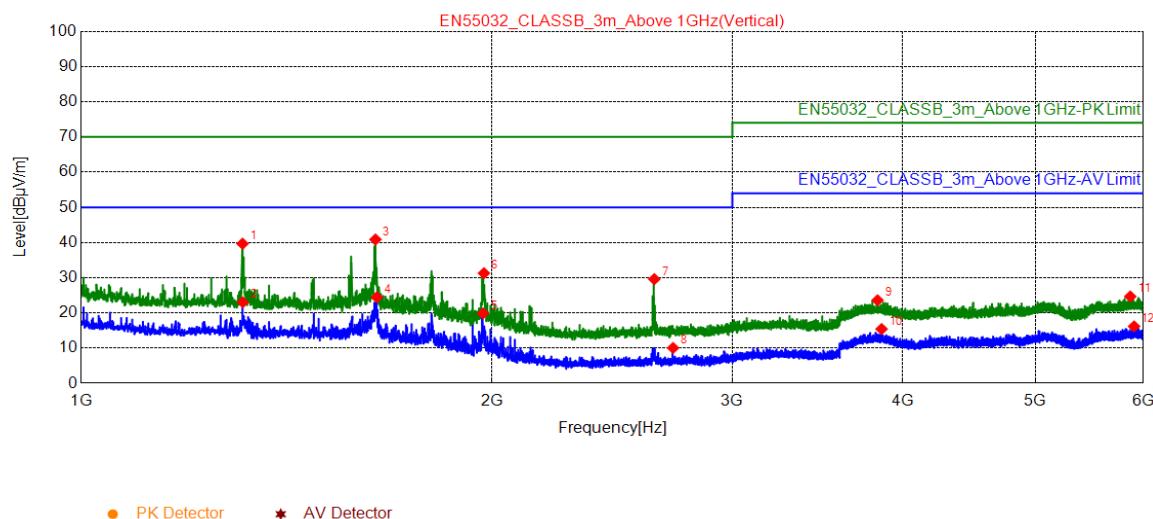

NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	1313.0000	58.61	39.67	70.00	30.33	100	348	Vertical	PK
2	1313.5000	41.99	23.05	50.00	26.95	100	348	Vertical	AV
3	1643.0000	58.77	40.87	70.00	29.13	100	348	Vertical	PK
4	1647.0000	42.35	24.46	50.00	25.54	100	254	Vertical	AV
5	1970.0000	36.83	19.89	50.00	30.11	100	327	Vertical	AV
6	1973.0000	48.23	31.29	70.00	38.71	100	296	Vertical	PK
7	2630.0000	44.57	29.60	70.00	40.40	100	358	Vertical	PK
8	2714.5000	24.77	10.06	50.00	39.94	100	171	Vertical	AV
9	3833.0000	35.54	23.61	74.00	50.39	100	193	Vertical	PK
10	3859.0000	27.30	15.43	54.00	38.57	100	58	Vertical	AV
11	5871.0000	33.27	24.67	74.00	49.33	100	17	Vertical	PK
12	5908.5000	24.73	16.17	54.00	37.83	100	348	Vertical	AV


#### REMARKS:

1. The emission levels of other frequencies were very low against the limit.
2. Margin = Limit - Level



BUREAU  
VERITAS


## 6.7. Test Photographs (30MHz ~ 1GHz)

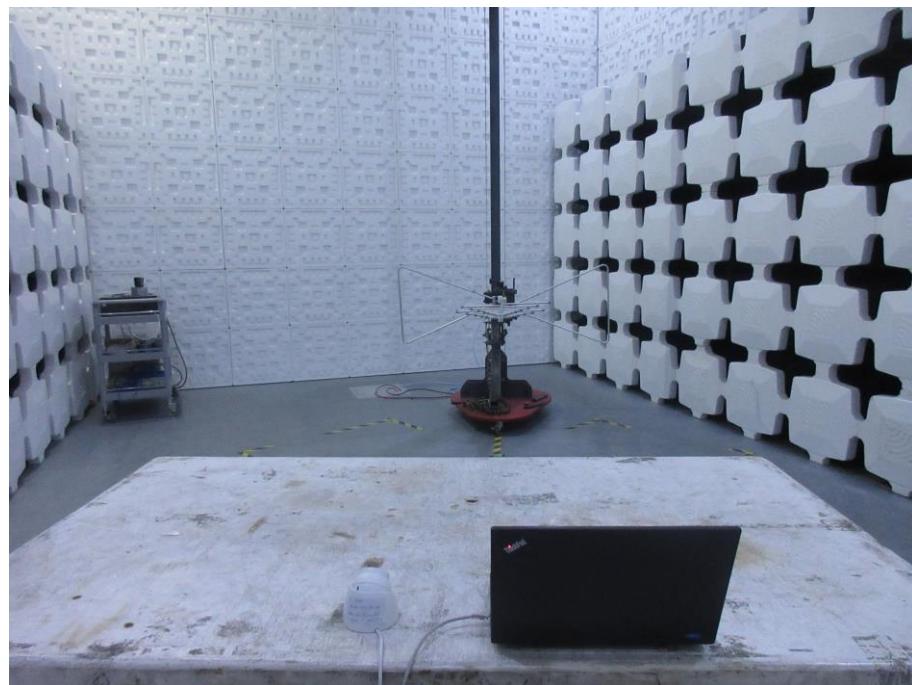



BUREAU  
VERITAS

## 6.8. Test Photographs (1GHz ~ 6GHz)

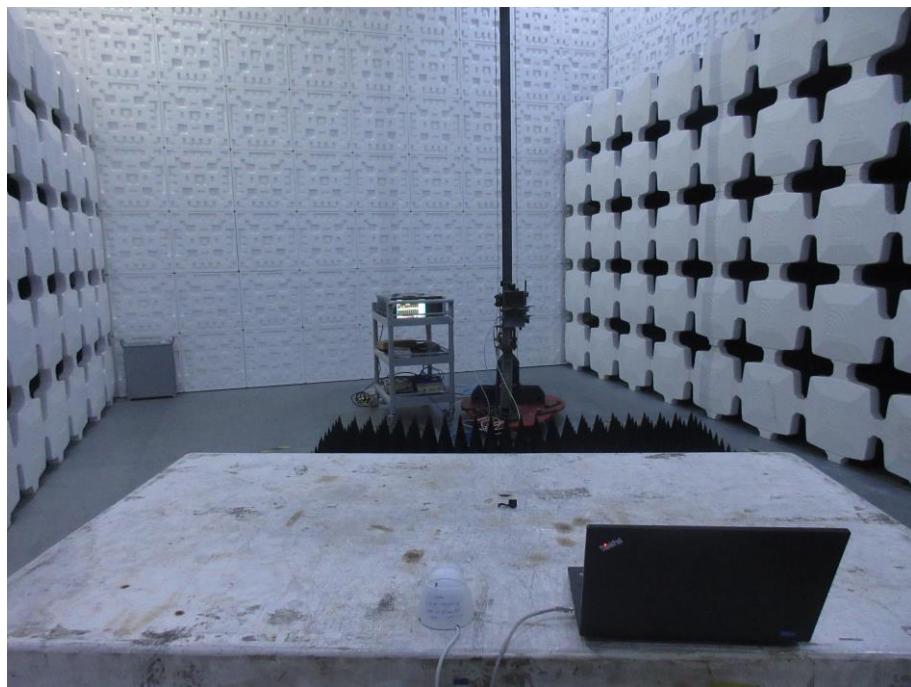




## 7. Electrostatic Discharge Immunity Test

### 7.1. Test Procedure

- a. In the case of air discharge testing the climatic conditions shall be within the following ranges:
  - ambient temperature: 15°C to 35°C;
  - relative humidity: 30% to 60%;
  - atmospheric pressure: 86 kPa (860 mbar) to 106 kPa (1060 mbar).
- b. Test programs and software shall be chosen so as to exercise all normal modes of operation of the EUT. The use of special exercising software is encouraged, but permitted only where it can be shown that the EUT is being comprehensively exercised.
- c. The test voltage shall be increased from the minimum to the selected test severity level, in order to determine any threshold of failure. The final severity level should not exceed the product specification value in order to avoid damage to the equipment.
- d. The test shall be performed with both air discharge and contact discharge. On reselected points at least 10 single discharges (in the most sensitive polarity) shall be applied on air discharge. On reselected points at least 25 single discharges (in the most sensitive polarity) shall be applied on contact discharge.
- e. For the time interval between successive single discharges an initial value of one second is recommended. Longer intervals may be necessary to determine whether a system failure has occurred.
- f. In the case of contact discharges, the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.
- g. In the case of painted surface covering a conducting substrate, the following procedure shall be adopted :
  - If the coating is not declared to be an insulating coating by the equipment manufacturer, then the pointed tip of the generator shall penetrate the coating so as to make contact with the conducting substrate.
  - Coating declared as insulating by the manufacturer shall only be submitted to the air discharge.
  - The contact discharge test shall not be applied to such surfaces.
- h. In the case of air discharges, the round discharge tip of the discharge electrode shall be approached as fast as possible (without causing mechanical damage) to touch the EUT . After each discharge, the ESD generator (discharge electrode) shall be removed from the EUT. The generator is then triggered for a new single discharge. This procedure shall be repeated until the discharges are completed. In the case of an air discharge test, the discharge switch, which is used for contact discharge, shall be closed.

## 7.2. Test Setup for Tests Performed in Laboratory

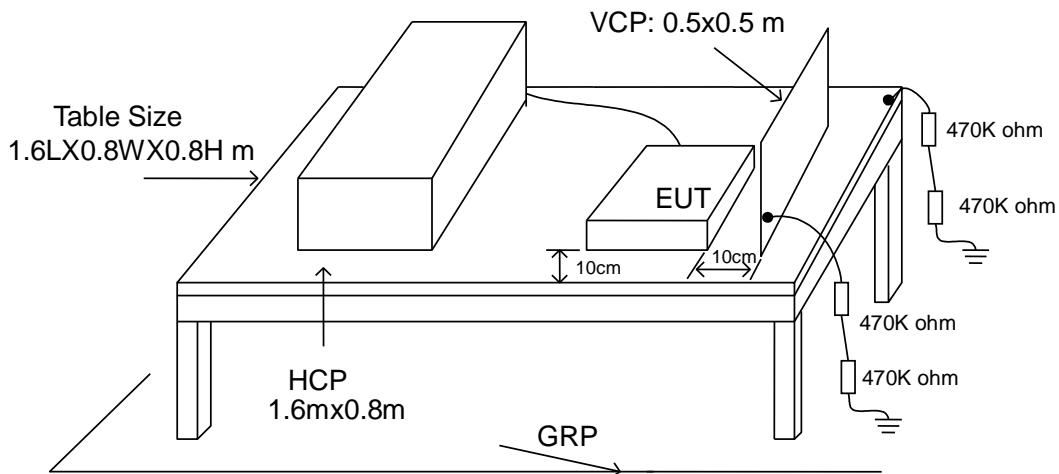

The test setup consists of the test generator, EUT and auxiliary instrumentation necessary to perform DIRECT and INDIRECT application of discharges to the EUT as applicable, in the follow manner:

- Contact Discharge to the conductive surfaces and to coupling plane;
- Air Discharge at insulating surfaces.

The preferred test method is that of type tests performed in laboratories and the only accepted method of demonstrating conformance with this standard. The EUT was arranged as closely as possible to arrangement in final installed conditions.

A ground reference plane was provided on the floor of the test site. It was a metallic sheet (copper or aluminum) of 0.25 mm, minimum thickness; other metallic may be used but they shall have at least 0.65 mm thickness. We provided 1 mm thickness stainless steel ground reference plane. The minimum size of the ground reference plane is 2.5 m x 2.5 m, the exact size depending on the dimensions of the EUT. It was connected to the protective grounding system.

The EUT was arranged and connected according to its functional requirements. A distance of 1 m minimum was provided between the EUT and the wall of the lab and any other metallic structure. In cases where this length exceeds the length necessary to apply the discharges to the selected points, the excess length shall, where possible, be placed non-inductively off the ground reference plane and shall not come closer than 0.2 m to other conductive parts in the test setup.

Where the EUT is installed on a metal table, the table was connected to the reference plane via a cable with a 470 k ohm resister located at each end, to prevent a build-up of charge. The test setup was consist a wooden table, 0.8m high, standing on the ground reference plane. A HCP, 1.6 m x 0.8 m, was placed on the table. The EUT and cables was isolated from the HCP by an insulating support 0.5 mm thick. The VCP size, 0.5 m x 0.5 m.



### 7.3. Test Severity Levels

Contact Discharge		Air Discharge	
Level	Test Voltage (kV) of Contact discharge	Level	Test Voltage (kV) of Air Discharge
1	±2	1	±2
2	±4	2	±4
3	±6	3	±8
4	±8	4	±15
x	Specified	x	Specified

Note: "x" is an open level.

### 7.4. Measurement Equipment

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Electrostatic discharge simulator and GUN &Noiseken	ESS-2002EX TC-815R	E1ES016	Oct.30, 2020



## 7.5. Test Result and Data

Final Test Result : **PASS**  
 Pass performance criteria : A  
 Required performance criteria : B  
 Basic Standard : EN 61000-4-2  
 Product Standard : EN 50130-4, EN 55024, EN 55035  
 Test Voltage :  $\pm 2 / \pm 4 / \pm 8$  kV for air discharge,  
 $\pm 2 / \pm 4 / \pm 6$  kV for contact discharge  
 Temperature : 22°C  
 Relative Humidity : 48 %  
 Atmospheric Pressure : 101 kPa

For EN 50130-4

	Contact Discharge								Air Discharge							
	<u>10</u> times / each								<u>10</u> times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
All metal portion	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
All nonmetal portion	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---

For EN 55024

	Contact Discharge								Air Discharge							
	<u>25</u> times / each								<u>10</u> times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
All metal portion	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
All nonmetal portion	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



For EN 55035


	Contact Discharge								Air Discharge							
	10 times / each								10 times / each							
Voltage	2 kV		4 kV		6 kV		8 kV		2 kV		4 kV		8 kV		10 kV	
Point\Polarity	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-
HCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
VCP	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
All metal portion	A	A	A	A	A	A	---	---	---	---	---	---	---	---	---	---
All nonmetal portion	---	---	---	---	---	---	---	---	A	A	A	A	A	A	---	---



BUREAU  
VERITAS

## 7.6. Test Photographs

- : Air Discharge
- : Contact Discharge

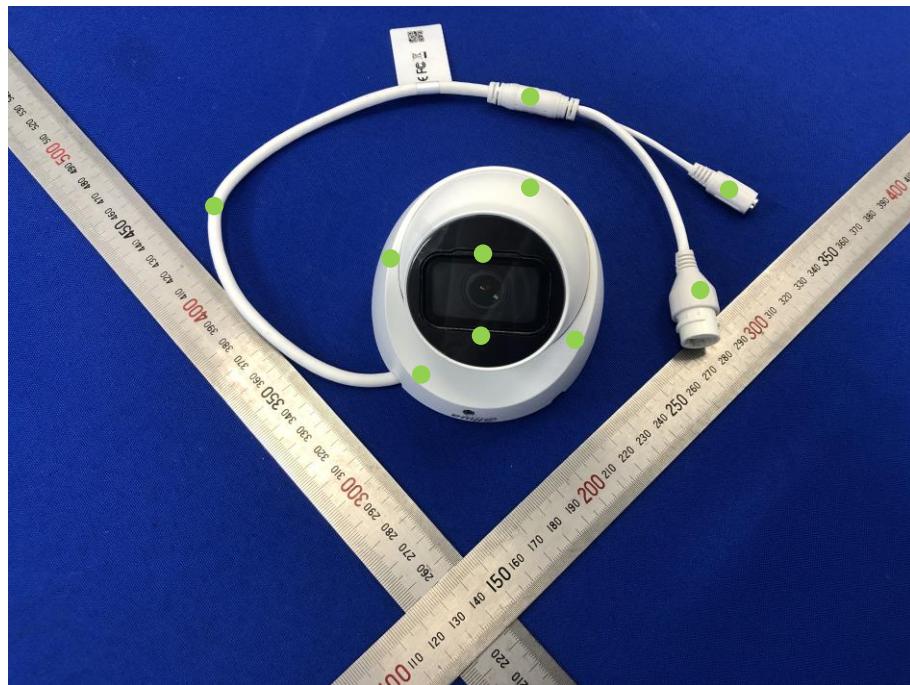





## 8. Radio Frequency Electromagnetic Field Immunity Test

### 8.1. Test Procedure


- a. The equipment to be tested is placed in the center of the enclosure on a wooden table. The equipment is then connected to power and signal leads according to pertinent installation instructions.
- b. The antenna which is enabling the complete frequency range of 80-1000 MHz is placed 3m away from the equipment. The required field strength is determined by placing the field strength meter(s) on top of or directly alongside the equipment under test and monitoring the field strength meter via a remote field strength indicator outside the enclosure while adjusting the continuous-wave to the applicable antennae.
- c. The test is normally performed with the antenna facing the most sensitive side of the EUT. The polarization of the field generated by the bucolical antenna necessitates testing each position twice, once with the antenna positioned vertically and again with the antenna positioned horizontally. The circular polarization of the field from the log-spiral antenna makes a change of position of the antenna unnecessary.
- d. At each of the above conditions, the frequency range is swept 80-1000 MHz, pausing to adjust the R.F. signal level or to switch oscillators and antenna. The rate of sweep is in the order of  $1.5 \times 10^{-3}$  decades/s. The sensitive frequencies or frequencies of dominant interest may be discretely analyzed.

### 8.2. Test Severity Levels

Frequency Band : 80-1000 MHz	
Level	Test field strength (V/m)
1	1
2	3
3	10
x	Specified

Note: "x" is an open class.

### 8.3. Test Setup

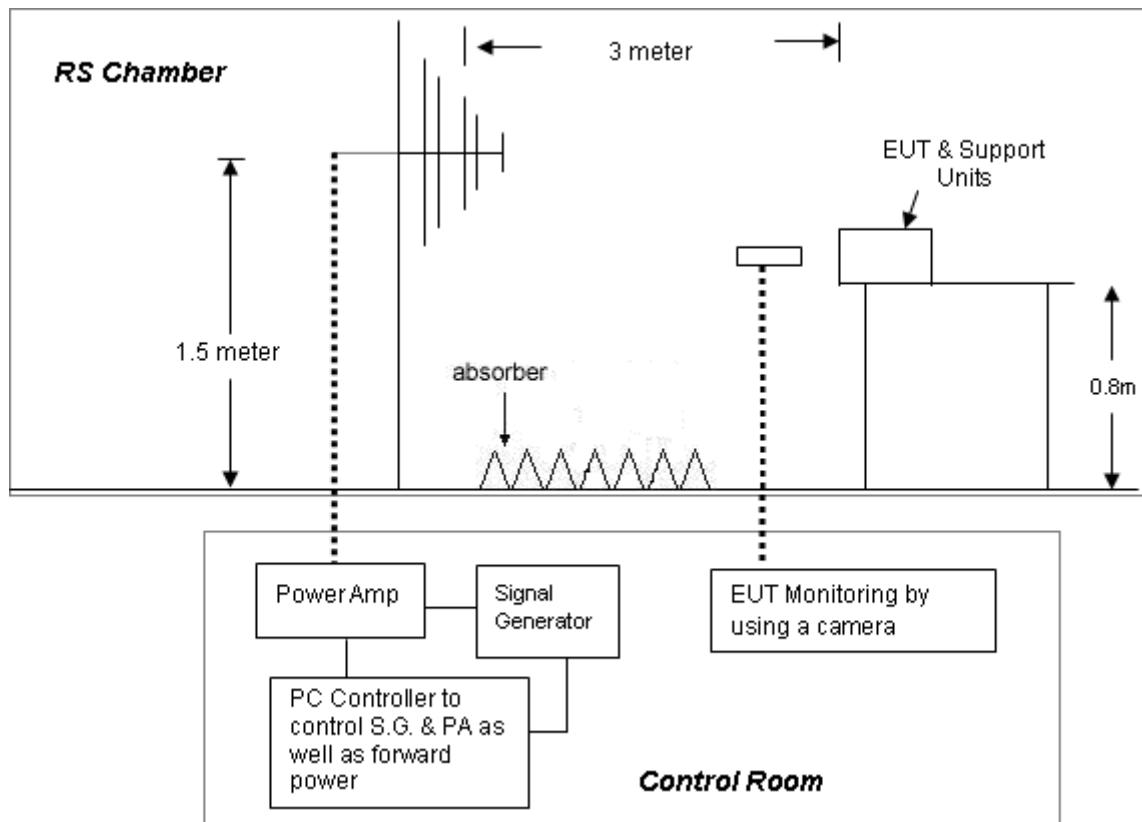

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

**NOTE:**

TABLETOP EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of IEC 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.



#### 8.4. Measurement Equipment

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Signal Generator ANRITSU	MG3692B	E1S9006	Mar.02, 2021
BiconiLog Antenna SCHWARZBECK	VULP 9118 E	E1A1037	N/A
High Gain Horn Antenna SCHWARZBECK	STLP 9149	E1A1038	N/A
RF Power Amplifier MILMEGA	80RF 1000-75	E1P4004	Apr.19, 2021
RF Power Amplifier MILMEGA	AS0102-65	E1P4005	Apr.19, 2021
RF Power Amplifier MILMEGA	AS1860-50	E1P4006	Apr.19, 2021
Power Meter	4232A/51011	E1P5001	Apr.19, 2021
Software	TOYO	N/A	N/A



## 8.5. Test Result and Data

Final Test Result	: PASS
Pass performance criteria	: A
Required performance criteria	: A
Basic Standard	: EN 61000-4-3
Product Standard	: EN 50130-4, EN 55024, EN 55035
Frequency Range	: 80~2700 MHz
Temperature	: 22°C
Relative Humidity	: 48%
Atmospheric Pressure	: 101 kPa

For EN 50130-4

1. Modulation : AM 80% , 1 kHz sine wave, Dwell time: 3 s				
2. Modulation : PM 1Hz(0.5 s ON, 0.5 s OFF), Dwell time: 3 s				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~2700	Vertical	Front	10 V/m	A
80~2700	Vertical	Rear	10 V/m	A
80~2700	Vertical	Left	10 V/m	A
80~2700	Vertical	Right	10 V/m	A
80~2700	Horizontal	Front	10 V/m	A
80~2700	Horizontal	Rear	10 V/m	A
80~2700	Horizontal	Left	10 V/m	A
80~2700	Horizontal	Right	10 V/m	A

For EN 55024

1. Modulation : AM 80 % , 1 kHz sine wave, Dwell time: 3 s				
Frequency Step Size : 1 % of preceding frequency value				
Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~1000	Vertical	Front	3 V/m	A
80~1000	Vertical	Rear	3 V/m	A
80~1000	Vertical	Left	3 V/m	A
80~1000	Vertical	Right	3 V/m	A
80~1000	Horizontal	Front	3 V/m	A
80~1000	Horizontal	Rear	3 V/m	A
80~1000	Horizontal	Left	3 V/m	A
80~1000	Horizontal	Right	3 V/m	A



For EN 55035



1. Modulation : AM 80 % , 1 kHz sine wave, Dwell time: 3 s  
Frequency Step Size : 1 % of preceding frequency value

Frequency (MHz)	Antenna Polarization	face	Field strength (V/m)	Result
80~1000, 1800, 2600, 3500, 5000	Vertical	Front	3 V/m	A
80~1000, 1800, 2600, 3500, 5000	Vertical	Rear	3 V/m	A
80~1000, 1800, 2600, 3500, 5000	Vertical	Left	3 V/m	A
80~1000, 1800, 2600, 3500, 5000	Vertical	Right	3 V/m	A
80~1000, 1800, 2600, 3500, 5000	Horizontal	Front	3 V/m	A
80~1000, 1800, 2600, 3500, 5000	Horizontal	Rear	3 V/m	A
80~1000, 1800, 2600, 3500, 5000	Horizontal	Left	3 V/m	A
80~1000, 1800, 2600, 3500, 5000	Horizontal	Right	3 V/m	A



BUREAU  
VERITAS

## 8.6. Test Photographs

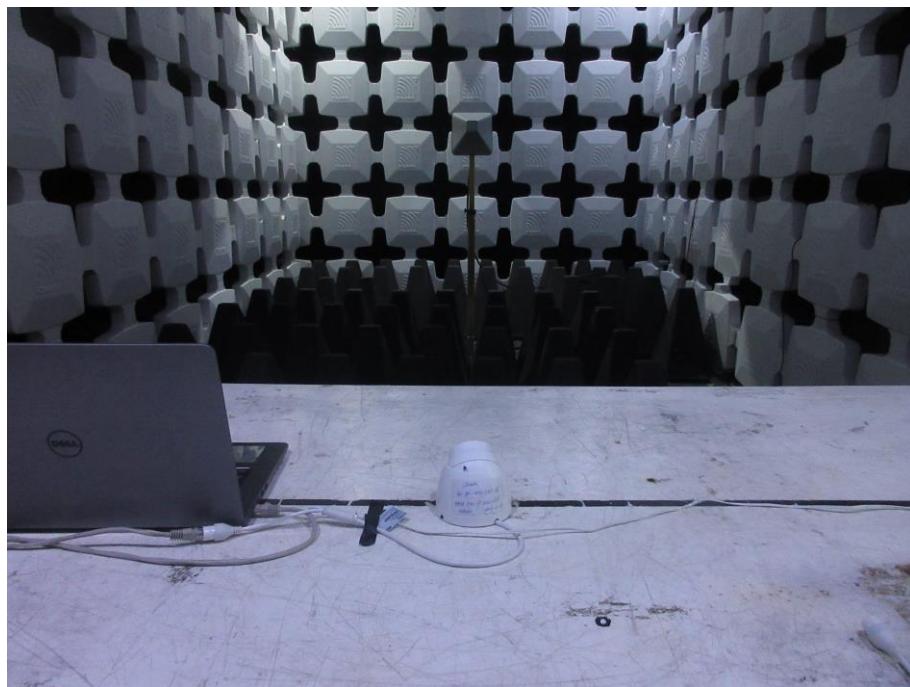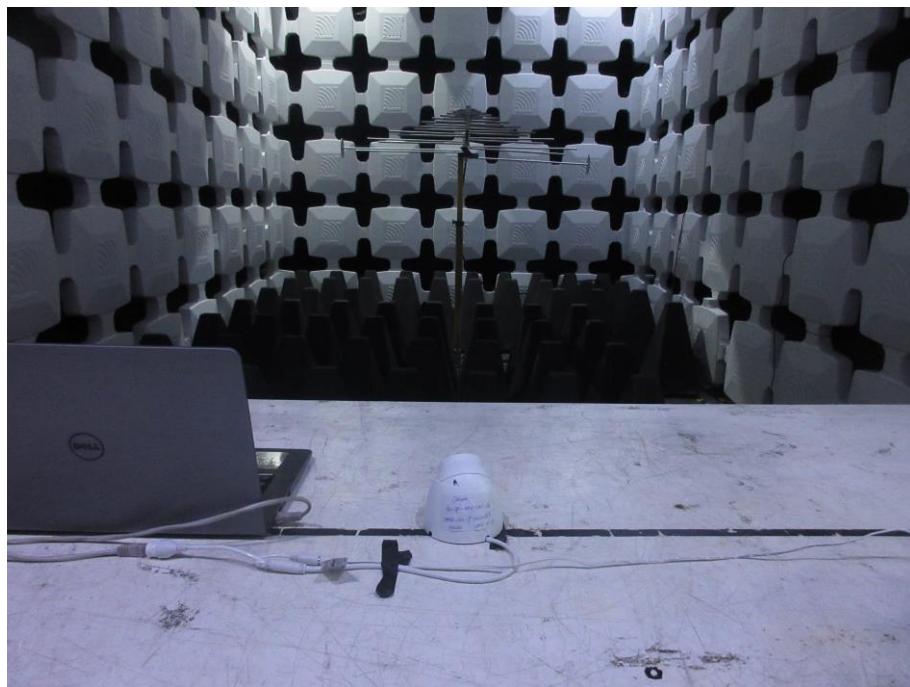



## 9. Electrical Fast Transient/ Burst Immunity Test

### 9.1. Test Procedure

- a. In order to minimize the effect of environmental parameters on test results, the climatic conditions when test is carrying out shall comply with the following requirements:
  - ambient temperature: 15°C to 35°C;
  - relative humidity : 45% to 75%;
  - Atmospheric pressure: 86 kPa (860 mbar) to 106 kPa (1060 mbar).
- b. In order to minimize the effect of environmental parameters on test results, the electromagnetic environment of the laboratory shall not influence the test results.
- c. The variety and diversity of equipment and systems to be tested make it difficult to establish general criteria for the evaluation of the effects of fast transients/bursts on equipment and systems.
- d. Test on Power Line:
  - The EFT/B-generator was located on the GRP.  
For floor standing equipment 1,0 m  
For table top equipment 0,5 m
  - The EFT/B-generator provides the ability to apply the test voltage in a non-symmetrical condition to the power supply input terminals of the EUT.
- e. Test on Communication Lines
  - The coupling clamp is composed of a clamp unit for housing the cable (length more than 3 m), and was placed on the GRP.
  - The coupling clamp provides the ability of coupling the fast transient/bursts to the cable under test.
- f. The test results may be classified on the basic of the operating conditions and the functional specification of the equipment under test, according to the following performance criteria :
  - Normal performance within the specification limits.
  - Temporary degradation or loss of function or performance which is self-recoverable.
  - Temporary degradation or loss of function or performance which requires operator intervention or system reset.
  - Degradation or loss of function which is not recoverable due to damage of equipment (components).


### 9.2. Test Severity Levels

The following test severity levels are recommended for the fast transient/burst test:

Open circuit output test voltage $\pm 10\%$		
Level	On Power Supply	On I/O signal, data and control line
1	0.5 kV	0.25 kV
2	1.0 kV	0.50 kV
3	2.0 kV	1.00 kV
4	4.0 kV	2.00 kV
x	Specified	Specified

Note: "x" is an open level. The level is subject to negotiation between the user and manufacturer or is specified by the manufacturer.

### 9.3. Test Setup

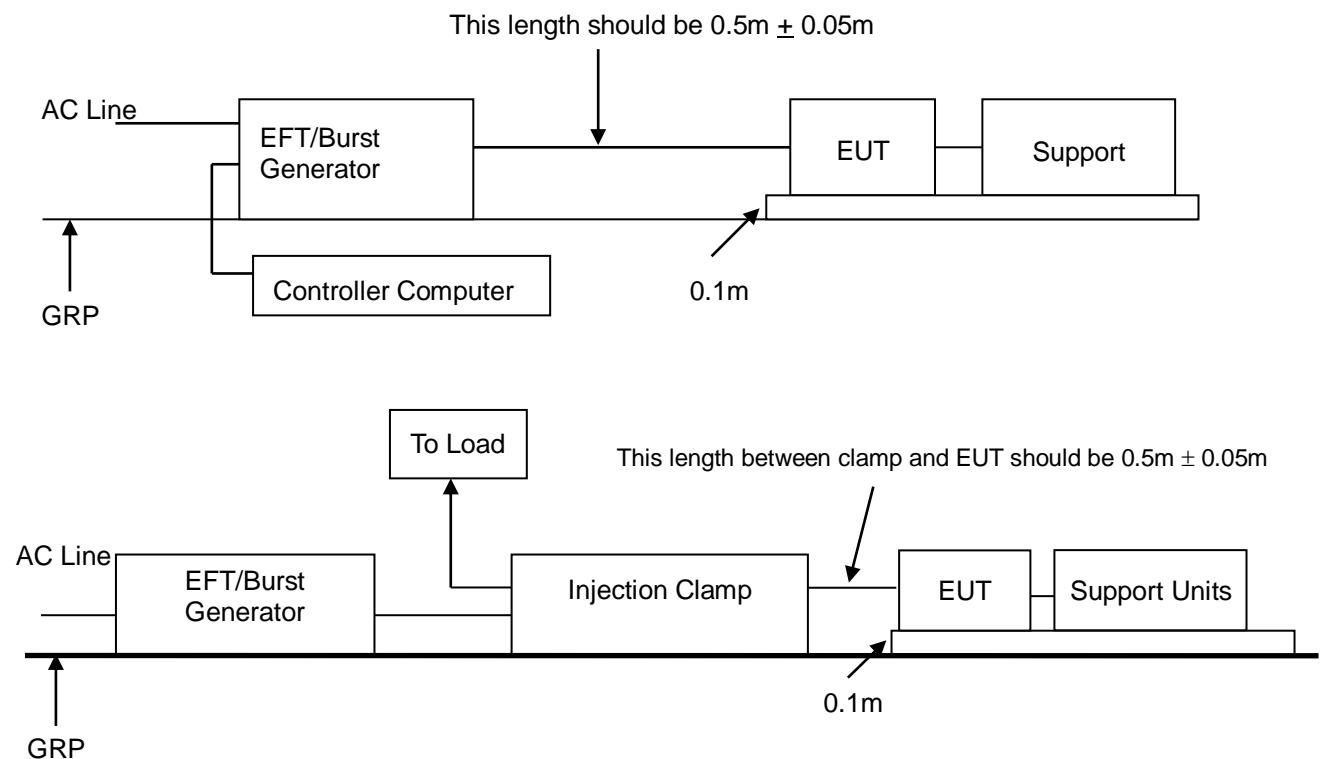

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

**NOTE:**

**TABLETOP EQUIPMENT**

The configuration consisted of a wooden table (0.1m high) standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum (at least 0.25 mm thick and 2.5 m square) connected to the protective grounding system. A minimum distance of 0.5 m was provided between the EUT and the walls of the laboratory or any other metallic structure.

**FLOOR STANDING EQUIPMENT**

The EUT installed in a representative system as described in section 7 of IEC 61000-4-4 and its cables, were isolated from the Ground Reference Plane by an insulating support that is 0.1-meter thick. The GRP consisted of a sheet of aluminum (at least 0.25 mm thick and 2.5 m square) connected to the protective grounding system.

### 9.4. Measurement Equipment

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
EMC Test System & Teseq	NSG3060	E1ES021	Mar.03, 2021
Capacitor Clamp	SYS014	E1C3001	Apr.19, 2021



## 9.5. Test Result and Data

Final Test Result : **PASS**  
Pass performance criteria : A  
Required performance criteria : B  
Basic Standard : EN 61000-4-4  
Product Standard : EN 50130-4, EN 55024, EN 55035  
Test Voltage : On Power Supply --  $\pm 0.5$  kV,  $\pm 1.0$  kV,  $\pm 2.0$  kV  
Temperature : 22°C  
Relative Humidity : 48%  
Atmospheric Pressure : 101 kPa

For EN 50130-4

Pulse : 5/50 ns	Repetition Rate: <u>100 kHz</u>			
Burst : 15ms/300ms				
Test time : 1 min/each condition				
Voltage/ Mode/ Polarity/ Result/ Phase	<u>1.0 kV</u>		<u>2.0 kV</u>	
	+	-	+	-
Power Line	---	---	A	A
Signal Line	A	A	---	---

For EN 55024

Pulse : 5/50 ns	Repetition Rate: <u>5 kHz</u>			
Burst : 15ms/300ms				
Test time : 1 min/each condition				
Voltage/ Mode/ Polarity/ Result/ Phase	<u>0.5 kV</u>		<u>1.0 kV</u>	
	+	-	+	-
Power Line	---	---	A	A
Signal Line	A	A	---	---



For EN 55035

Pulse : 5/50 ns	Repetition Rate: <u>5 kHz</u>			
Burst : 15ms/300ms				
Test time : 1 min/each condition				
Voltage/ Mode/ Polarity/ Result/ Phase		<u>0.5 kV</u>		<u>1.0 kV</u>
	+	-	+	-
Power Line	---	---	A	A
Signal Line	A	A	---	---



BUREAU  
VERITAS

## 9.6. Test Photographs





## 10. Surge Immunity Test

### 10.1. Test Procedure

- a. Climatic conditions  
The climatic conditions shall comply with the following requirements:
  - ambient temperature: 15 °C to 35 °C
  - relative humidity: 10 % to 75 %
  - atmospheric pressure : 86 kPa to 106 kPa ( 860 mbar to 1060 mbar )
- b. Electromagnetic conditions  
the electromagnetic environment of the laboratory shall not influence the test results.
- c. The test shall be performed according the test plan that shall specify the test set-up with
  - generator and other equipment utilized;
  - test level (voltage/current);
  - generator source impedance;
  - internal or external generator trigger;
  - number of tests: at least five positive and five negative at the selected points;
  - repetition rate: maximum 1/min.
  - inputs and outputs to be tested;
  - representative operating conditions of the EUT;
  - sequence of application of the surge to the circuit;
  - phase angle in the case of AC. power supply;
  - actual installation conditions, for example :
    - AC: neutral earthed,
    - DC: (+) or (-) earthed to simulated the actual earthing conditions.
- d. If not otherwise specified the surges have to be applied synchronized to the voltage phase at the zero-crossing and the peak value of the AC. voltage wave (positive and negative).
- e. The surges have to be applied line to line and line(s) and earth. When testing line to earth, the test voltage has to be applied successively between each of the lines and earth, if there is no other specification.
- f. The test procedure shall also consider the non-linear current-voltage characteristics of the equipment under test. Therefore the test voltage has to be increased by steps up to the test level specified in the product standard or test plan.
- g. All lower levels including the selected test level shall be satisfied. For testing the secondary protection, the output voltage of the generator shall be increased up to the worst-case voltage breakdown level (let-through level) of the primary protection.
- h. If the actual operating signal sources are not available, that may be simulated. Under no circumstances may the test level exceed the product specification. The test shall be carried out according to a test plan.
- i. To find all critical points of the duty cycle of the equipment, a sufficient number of positive and negative test pulses shall be applied. For acceptance test previously unstressed equipment shall be used to the protection devices shall be replaced.


### 10.2. Test Severity Level

Level	Open-circuit test voltage, $\pm 10\%$ , kV
1	0.5
2	1.0
3	2.0
4	4.0
x	Specified

Note: "x" is an open class. This level can be specified in the product specification.



### 10.3. Test Setup

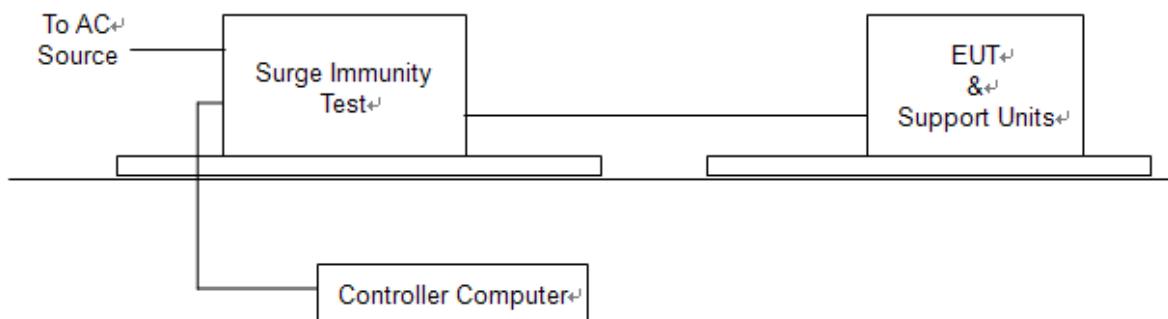

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 10.4. Measurement Equipment

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
EMC Test System & Teseq	NSG3060	E1ES021	Mar.03, 2021



## 10.5. Test Result and Data

Final Test Result	: <b>PASS</b>
Pass performance criteria	: A
Required performance criteria	: B
Basic Standard	: EN 61000-4-5
Product Standard	: EN 50130-4, EN 55024, EN 55035
Test Voltage	: Power Port -- $\pm 0.5$ kV, $\pm 1.0$ kV Signal Port -- $\pm 0.5$ kV, $\pm 1.0$ kV
Temperature	: 22°C
Relative Humidity	: 48%
Atmospheric Pressure	: 101 kPa

For EN 50130-4

Waveform : 1.2/50μs(8/20μs)		Repetition rate : 60 sec				
Time : 20 time/each condition for power port, 5 time/each condition for signal port						
Phase Voltage / Mode / Polarity / Result		0°		90°	180°	270°
1.0 kV	L-N	+	A	A	A	A
		-	A	A	A	A
1.0 kV	Signal port	+	A			
		-	A			

For EN 55024

Waveform : 1.2/50μs(8/20μs)		Repetition rate : 60 sec				
Time : 20 time/each condition for power port, 5 time/each condition for signal port						
Phase Voltage / Mode / Polarity / Result		0°		90°	180°	270°
1.0 kV	L-N	+	A	A	A	A
		-	A	A	A	A
1.0 kV	Signal port	+	A			
		-	A			

For EN 55035

Waveform : 1.2/50μs(8/20μs)		Repetition rate : 60 sec				
Time : 20 time/each condition for power port, 5 time/each condition for signal port						
Phase Voltage / Mode / Polarity / Result		0°		90°	180°	270°
1.0 kV	L-N	+	A	A	A	A
		-	A	A	A	A
1.0 kV	Signal port	+	A			
		-	A			



## 10.6. Test Photographs





## 11. Conduction Disturbances Induced by Radio-Frequency Fields

### 11.1. Test Procedure


- a. The EUT shall be operated within its intended climatic conditions. The temperature and relative humidity should be recorded.
- b. This test method test can be performed without using a sell shielded enclosure. This is because the disturbance levels applied and the geometry of the setups are not likely to radiated a high amount of energy, especially at the lower frequencies. If under certain circumstances the radiated energy is too high, a shielded enclosure has to be used.
- c. The test shall be performed with the test generator connected to each of the coupling and decoupling devices in turn while the other non-excited RF-input ports of the coupling devices are terminated by a 50 ohm load resistor.
- d. The frequency range is swept from 150 kHz to 80 MHz, using the signal levels established during the setting process, and with the disturbance signal 80% amplitude modulated with a 1 kHz sign wave, pausing to adjust the RF-signal level or to switch coupling devices as necessary. The rate of sweep shall no exceed  $1.5 \times 10^{-3}$  decades/s. Where the frequency is swept incrementally, the step size shall no exceed 1% of the start and thereafter 1% of the preceding frequency value.
- e. The dwell time at each frequency shall not be less than the time necessary for the EUT to be exercised, and able to respond. Sensitive frequencies e.g. clock frequency (ies) and harmonics or frequencies of dominant interest shall be analyzed separately.
- f. An alternative test procedure may be adopted, wherein the frequency range is swept incrementally, with a step size not exceeding 4% of the start and thereafter 4% of the preceding frequency value. The test level should be at least twice the value of the specified test level.
- g. In cases of dispute, the test procedure using a step size not exceeding 1% of the start and thereafter 1% of preceding frequency value shall take precedence.
- h. Attempts should be made to fully exercise the EUT during testing, and to fully interrogate all exercise modes selected for susceptibility.
- i. The use of special exercising programs is recommended.
- j. Testing shall be performed according to a Test Plan, which shall be included in the test report.
- k. It may be necessary to carry out some investigatory testing in order to establish some aspects of the test plan.

### 11.2. Test Severity Levels

Level	Voltage Level (e.m.f.)
1	1 V
2	3 V
3	10 V
x	Specified

Note: "x" is an open class. This level can be specified in the product specification.

### 11.3. Test Setup

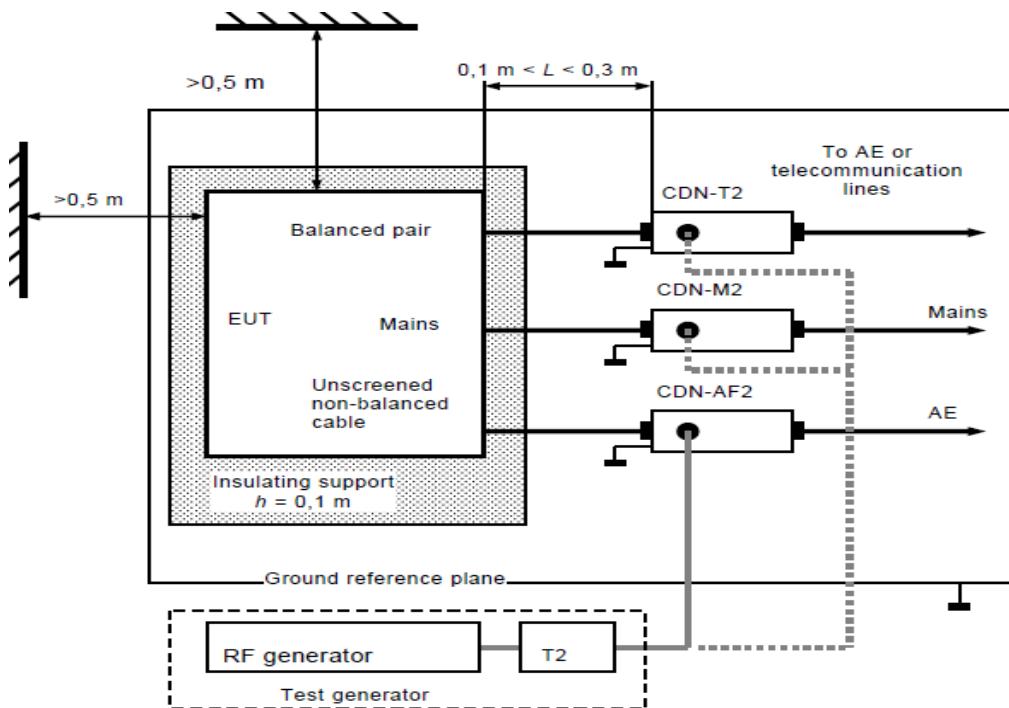

**Note:**

1. The EUT is setup 0.1 m above Ground Reference Plane.
2. The CDNs and / or EM clamp used for real test depends on ports and cables configuration of EUT.
3. For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 11.4. Measurement Equipment

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Compact RF Simulator Teseq	NSG 4070-30	E1ES017	Apr.19, 2020
Coupling-Decoupling Network Lüthi Elektronik-Feinmechanik	CDN L-801 M2/M3	E1C4003	Apr.19, 2020
Electromagnetic Injection Clamp Teseq	EM101	E1C3008	Mar.29, 2021



## 11.5. Test Result and Data

Final Test Result : **PASS**  
Pass performance criteria : A  
Required performance criteria : A  
Basic Standard : EN 61000-4-6  
Product Standard : EN 50130-4, EN 55024, EN 55035  
Coupling mode : CDN-(M2/M3) for power ports  
EM-CLAMP for Signal Ports  
Temperature : 22 °C  
Relative Humidity : 48%  
Atmospheric Pressure : 101 kPa

For EN 50130-4

Frequency: 0.15~100 MHz, Modulation: AM 80%, 1 kHz sine wave and PM 1 Hz (0.5 s ON, 0.5 s OFF)			
Dwell time: 3.0 s			
Frequency Step Size: 1% of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 100 MHz	Power port	10	A
0.15 ~ 100 MHz	Signal port	10	A

For EN 55024

Frequency: 0.15~80 MHz, Modulation: AM 80%, 1 kHz sine wave			
Dwell time: 3.0 s			
Frequency Step Size: 1% of preceding frequency value			
Frequency	Test mode	Voltage(V)	Result
0.15 ~ 80 MHz	Power port	3	A
0.15 ~ 80 MHz	Signal port	3	A



For EN 55035

Frequency: 0.15~80 MHz, Modulation: AM 80%, 1 kHz sine wave

Dwell time: 3.0 s


Frequency Step Size: 1% of preceding frequency value

Frequency	Test mode	Voltage(V)	Result
0.15 ~ 10 MHz	Power port and signal port	3	A
10 ~ 30 MHz	Power port and signal port	3 ~ 1	A
30 ~ 80 MHz	Power port and signal port	1	A




BUREAU  
VERITAS

## 11.6. Test Photographs

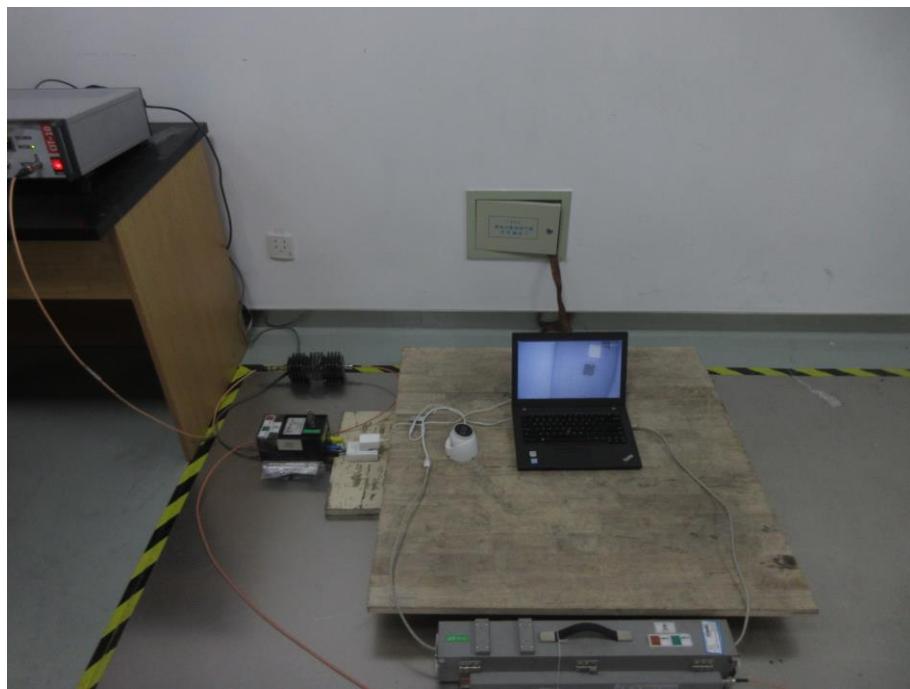

## 12. Power Frequency Magnetic Field Immunity Test

### 12.1. Test Setup

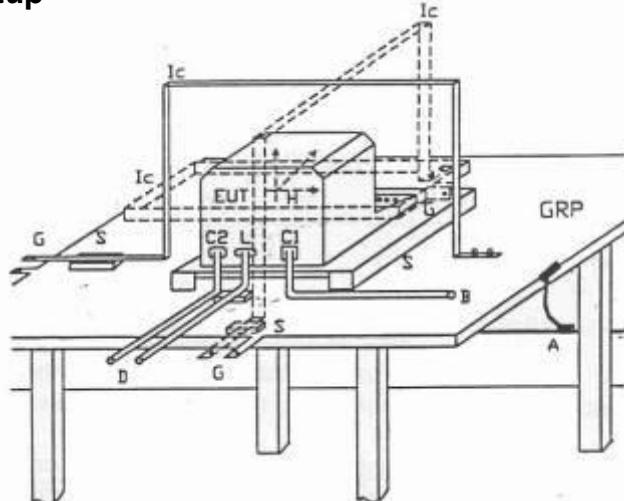

GPR	:	Ground plane	C1	:	Power supply circuit
A	:	Safety earth	C2	:	Signal circuit
S	:	Insulating support	L	:	Communication line
EUT	:	Equipment under test	B	:	To power supply source
Lc	:	Induction coil	D	:	To signal source, simulator
E	:	Earth terminal	G	:	To the test generator

### 12.2. Test Severity Levels

Level	Magnetic field strength (A/m)
1	1
2	3
3	10
4	30
5	100
x	special

Note: "x" is an open level. This level can be given in the product specification.



### 12.3. Measurement Equipment

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Signal Conditioning Unit- Lumped Impedance Schaffner	CCN 100-1	E1HF002	Apr.19, 2021
5KV AC Power Source Schaffner	NSG 1007	E1HF001	Apr.19, 2021
Field coil	INA 703 coil	E1M 6002	N/A
Software	Shchaffner Win 2100V3	N/A	N/A



## 12.4. Test Result and Data

Final Test Result : **PASS**  
Pass performance criteria : A  
Required performance criteria : A  
Basic Standard : EN 61000-4-8  
Product Standard : EN 55024, EN 55035  
Temperature : 22°C  
Relative Humidity : 48%  
Atmospheric Pressure : 101 kPa

For EN 55024

Power Frequency Magnetic Field : <u>50/60</u> Hz, <u>1</u> A/m		
Coil Orientation	Testing duration	Results
X-axis	1.0 Min	A
Y-axis	1.0 Min	A
Z-axis	1.0 Min	A

For EN 55035

Power Frequency Magnetic Field : <u>50/60</u> Hz, <u>1</u> A/m		
Coil Orientation	Testing duration	Results
X-axis	1.0 Min	A
Y-axis	1.0 Min	A
Z-axis	1.0 Min	A



BUREAU  
VERITAS

## 12.5. Test Photographs






## 13. Voltage Dips and Voltage Interruptions Immunity Test Setup

### 13.1. Test Conditions

1. Source voltage and frequency: AC 100/230/240V / 50Hz, Single phase.
2. Test of interval: 10 sec.
3. Level and duration: Sequence of 3 dips/interrupts.
4. Voltage rise (and fall) time: 1 ~ 5 µs.
5. Test severity:

Voltage dips and Interrupt reduction (%)	Test Duration (period)
>95%	250
30%	25
>95%	0.5

### 13.2. Test Setup

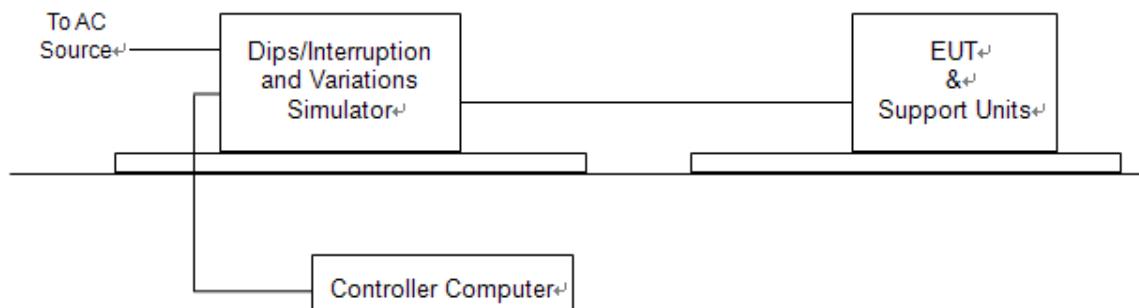

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

### 13.3. Measurement Equipment

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Power Fail Simulator	PFS 503N	E1HF003	Mar.03, 2021
Power Source	NetWave	S1S1022	Mar.03, 2021



### 13.4. Test Result and Data

Final Test Result	:	PASS
Pass performance Criteria	:	C for voltage interruption, A for voltage dips,
Required performance Criteria	:	C for voltage interruption, B/C for voltage dips
Basic Standard	:	EN 61000-4-11
Product Standard	:	EN 50130-4 and EN 55035
Temperature	:	22°C
Relative Humidity	:	48%
Atmospheric Pressure	:	101 kPa

For EN 50130-4

Voltage(UT): AC 230V, 50 Hz Interval(s): 10 s Times: 3			Phase / Result							
Test mode	Test level UT %	Durations (period / ms )	0	45	90	135	180	225	270	315
Voltage interruptions	100%	250	C	C	C	C	C	C	C	C
Voltage dips	20%	250	A	A	A	A	A	A	A	A
	30%	25	A	A	A	A	A	A	A	A
	60%	10	A	A	A	A	A	A	A	A

Test mode	Test level	Result
Voltage variations	Unom+10%	A
	Unom-15%	A

For EN 55024

Voltage(UT): AC 230V, 50 Hz Interval(s): 10 s Times: 3			Phase / Result							
Test mode	Test level UT %	Durations (period / ms )	0	45	90	135	180	225	270	315
Voltage interruptions	>95%	250	C	C	C	C	C	C	C	C
Voltage dips	30%	25	A	A	A	A	A	A	A	A
	>95%	0.5	A	A	A	A	A	A	A	A



For EN 55035

Voltage(UT): AC 230V, 50 Hz    Interval(s): 10 s    Times: 3										
Test mode	Test level UT %	Durations (period / ms )	Phase / Result							
			0	45	90	135	180	225	270	315
Voltage interruptions	>95%	250	C	C	C	C	C	C	C	C
Voltage dips	30%	25	A	A	A	A	A	A	A	A
	>95%	0.5	A	A	A	A	A	A	A	A



### 13.5. Test Photographs







BUREAU  
VERITAS

## 14. Photographs of EUT







BUREAU  
VERITAS

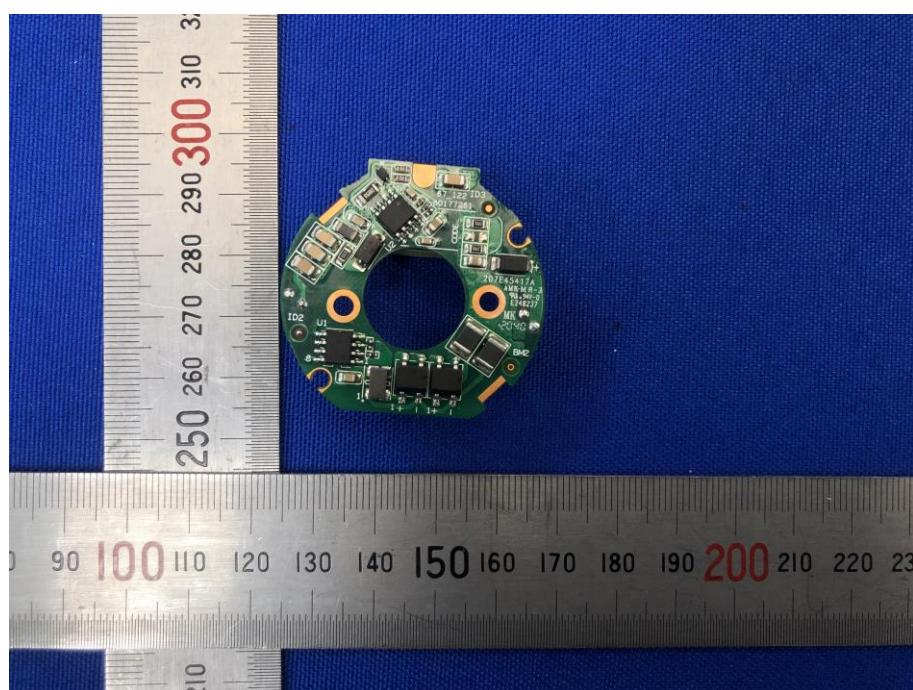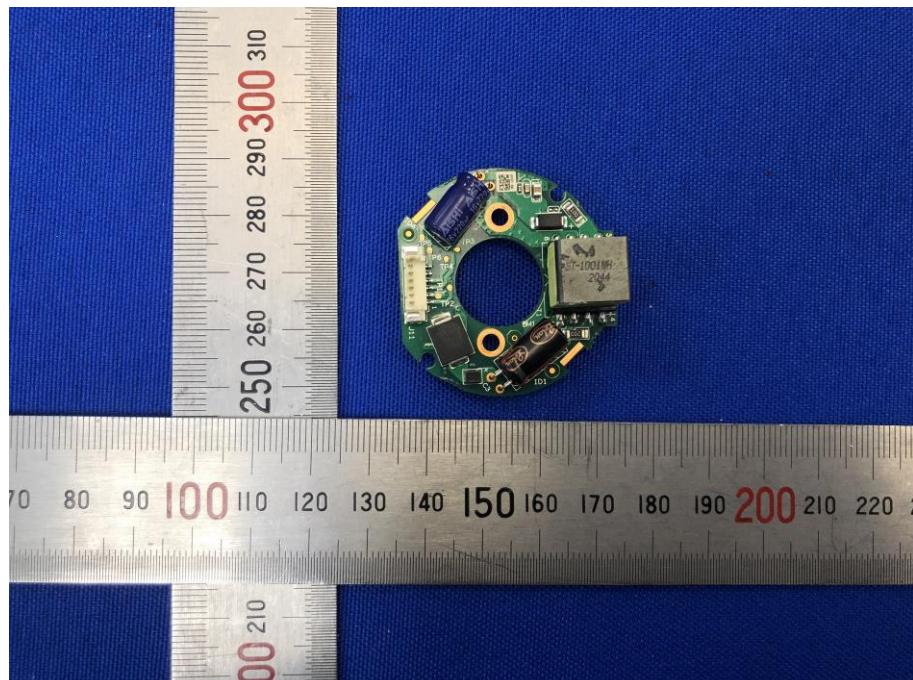





BUREAU  
VERITAS

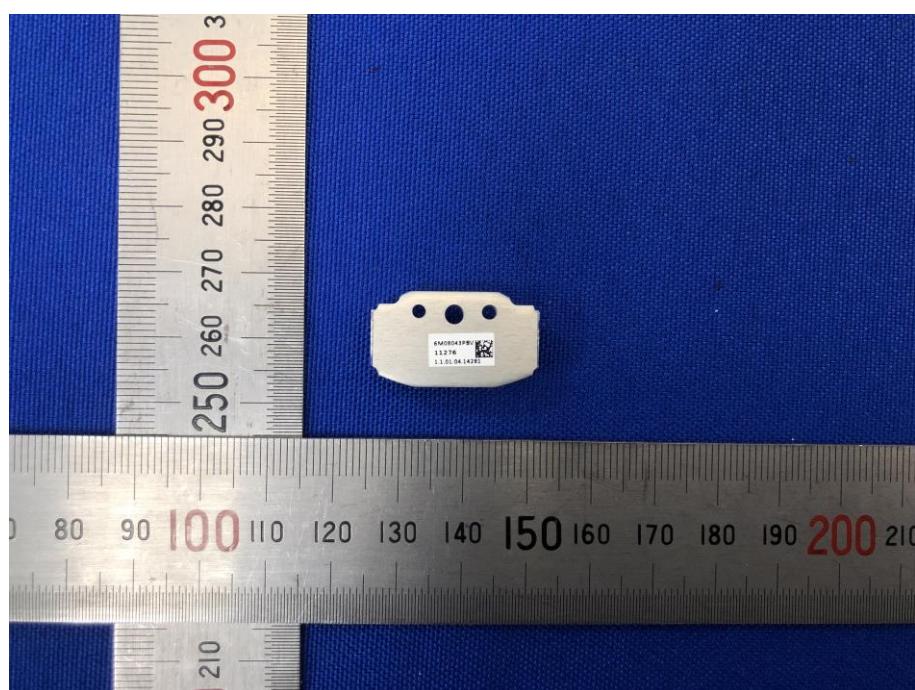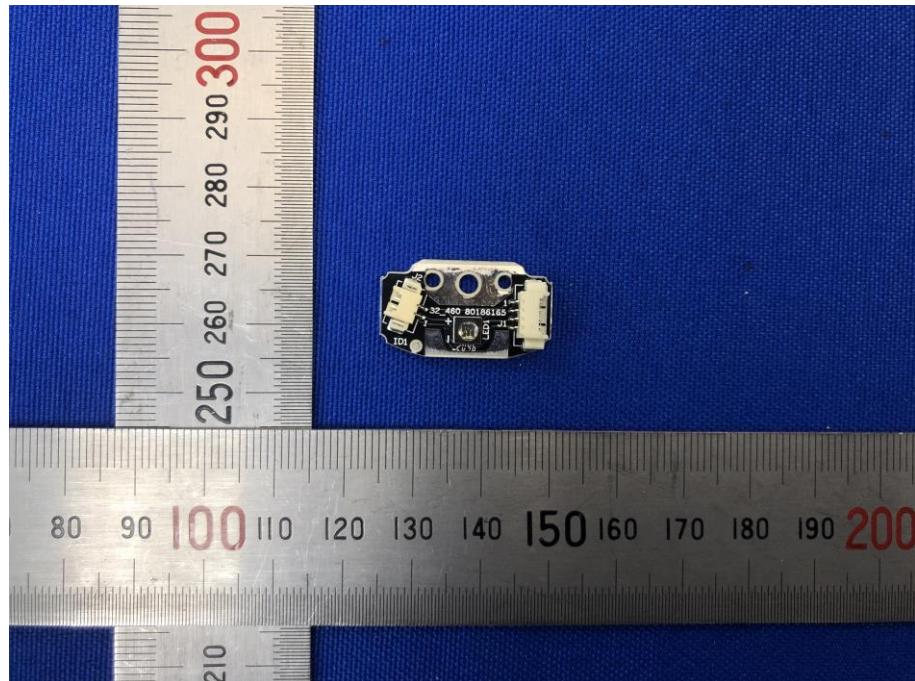



BUREAU  
VERITAS

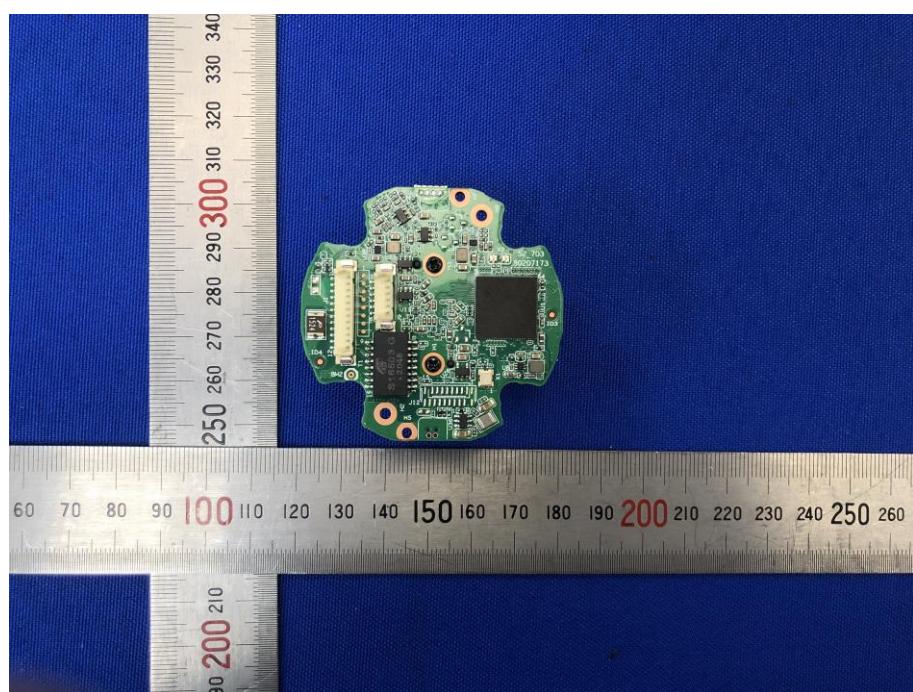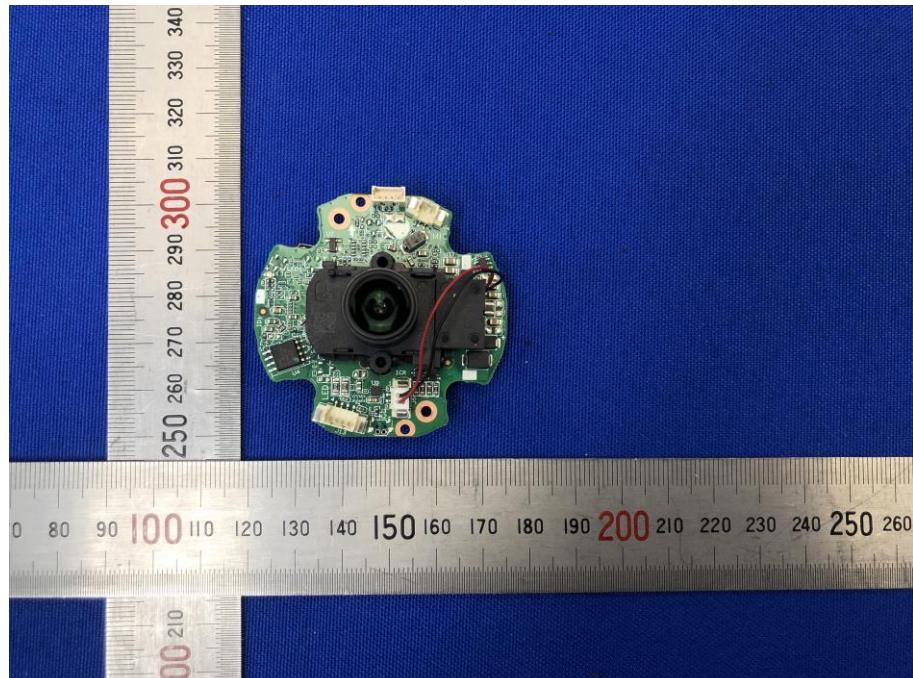

--- END ---