


Thromsweeper™

Thrombus Extraction Catheter

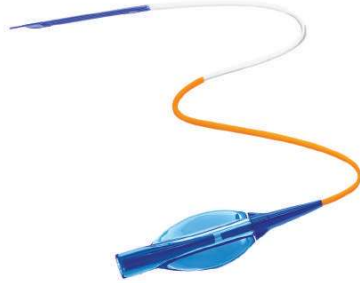

- Large suction lumen minimizes the flow resistance and boosts the extraction performance.
- Low crossing profile is designed for the compatibility with the smallest 6F guiding catheter.
- Hydrophilic coating on distal shaft provides great crossability and deliverability.
- Embedded Platinum marker empowers smooth-feeling of delivery and visualization.
- Removable support-wire helps rapidly and easily reach to the lesion.

Technical Parameters

Design		Rapid Exchange
Guiding Catheter Compatibility (minimum)		6F (0.070")
Guide Wire Compatibility		0.014"
Effective Length		1450mm
Extraction Lumen Area		1.03mm ²
Guide wire Lumen Length		113mm
Catheter O.D.	Proximal	1.27mm
	Distal	1.50mm

Ordering Information

Catalogue No.	Specification
XS500001	150

Notice: Please contact the sales for detailed information before placing the order.

Deliver™

Infusion Catheter



- Combined liquid perfusion lumen and guide wire lumen fulfills the perfusion to target lesion without withdrawing the guide wire.
- Rapid exchange design, convenient for operation.
- Pt-Ir marker provides excellent visibility under X-ray.

Technical Parameters

Material	Stainless steel filmed with Nylon
Marker	Pt-Ir Alloy
Tip O.D.	1.5F (0.50mm)
Distal O.D.	3.3F (1.09mm)
Proximal O.D.	3.1F (1.03mm)
Guide Wire Lumen I.D.	0.015" (0.38mm)
Effective Length	1390mm
Guiding Catheter Compatibility	5F/ 6F/ 7F
Guide Wire Compatibility	0.014"

Ordering Information

Catalogue No.	Specification
LPRX139	

Notice: Please contact the sales for detailed information before placing the order.