Playground MINI – with towers and slides Components: Tower with roof – 1 unit Made of galvanized metal posts (pipe with a diameter of 11.4 cm, wall thickness 2.5 mm). The upper parts of the posts will be equipped with plastic caps, fixed with two aluminum rivets. The metal elements will be processed by sandblasting and painted with electrostatic coating. The floor of the towers will be made of a 2 mm thick metal strip, processed by sandblasting and provided with holes. The metal strip surface will have a plastisol coating. The roof will be made of LLDPE using the rotomolding technology and fixed directly to the metal posts with special attachment systems.

Scale – 1 unit


Consisting of railings (one part length will be 90 cm) made of galvanized metal pipes, processed by sandblasting and painted with electrostatic coating (the top part with dimensions 32x2.5 mm, the vertical pipes with dimensions 27x2.5 mm). The steps will be made of a 2 mm thick metal strip, processed by sandblasting and provided with 25 mm diameter holes. The metal strip surface will have a plastisol coating.


Straight slide – 1 unit

Made of LLDPE (recycled plastic granules) using rotomolding technology and will be attached to the tower. At the lower part, it will be anchored in concrete.

Double straight slide – 1 unit


Made of LLDPE (recycled plastic granules) using rotomolding technology, it will be installed on a platform with a height of 1000 mm and fixed to the tower.



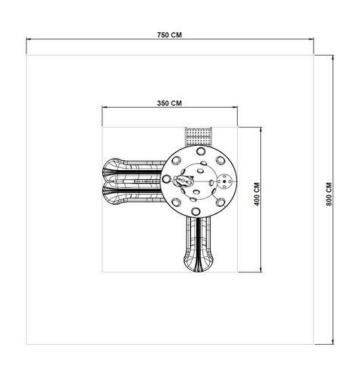

GALAEXPORT MÜHEMDISLIK İNŞ. DIŞ TİC. SANLUTD. ŞTİ. Fevziçakmak Mil. Yayın Cd.No: 18 Karatay KONYA Selçuk Vergi Dairesi 388 181 3955



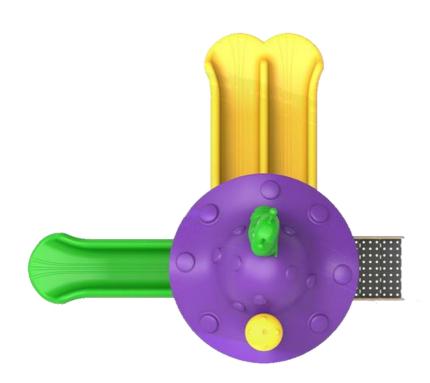

GALAEXPORT MÜHENDİSLİK İNŞ. DİŞ TİC. SAN LTD. ŞTİ. Fevziçakmak Mi. Yoyun Cd.No: 18 Karatay KONYA Selçuk Vergi Daiyesi 388 181 3955