


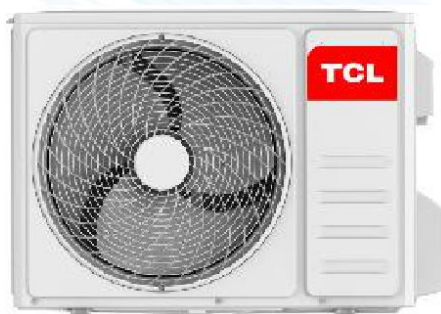

R32
eco REFRIGERANT

5 ani
garantie
compresor


Specificatii tehnice ale aerului conditionat tip inverter split cu agent frigorific R32, noua eficienta pentru Europa

MODEL		TCL	R 32 - 9000 BTU
Tip			pompa de caldura
Tip control			telecomanda
Capacitatea de racire declarata	W		2600(940~3320)
Capacitatea de incalzire declarata	W		2610(940~3380)
SEER declarat *	W/W		6.5
Clasa energetica			A++
SCOP mediu declarat**	W/W		4
Clasa energetica			A+
Consumul anual de energie	Racire	kwh/a	140
	Incalzire	kwh/a	735
Indepartarea umiditatii	l/h		0.9
Putere sonora interior (H/ML/Mute)	dB(A)		50/43/35/32
Putere sonora exterior	dB(A)		60
Presiune sonora interior	dB(A)		40/33/25/22
Presiune sonora exterior	dB(A)		50
Date electrice			
Alimentare			220-240V~/50Hz/1P
Domeniu tensiune		V	165~265
Curent	Racire	A	4.0(1.2~6.3)
	Incalzire	A	4.1(1.2~6.5)
Putere	Racire	W	750(240 ~ 1230)
	Incalzire	W	752(240 ~ 1280)
Sistemul refrigerant			
Agent frigorific	Kg		R32/0.53Kg
Compresor	Tip		Rotativ
	Prodicator		GMCC
Circulatia aerului la interior		m ³ /h	420/420
Tip ventilator interior			turbina axial-radial
Tip ventilator exterior			polipropilena

It's COOOOL !!!



Ambasador de brand
Neymar Jr.

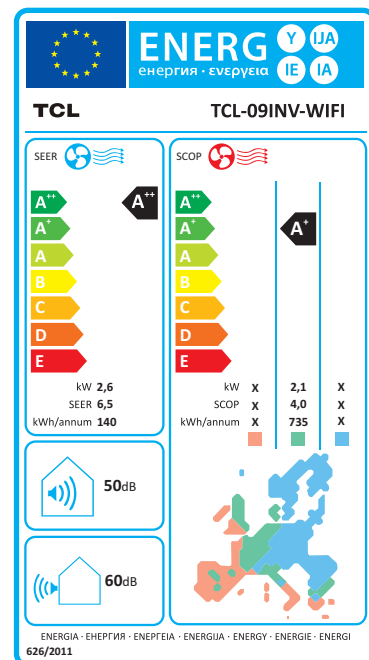

Conexiuni			
Cabluri de conectare	Nr. x Sectiune		4×1.0mm ²
Dispozitiv de expansiune			Capilar
Conducta de conectare	Gaz	Inch.	3/8"
	Lichid	Inch.	1/4"
Altele			
Domeniul de aplicare	m ²		9~16
Lungimea max. a conductei refriger.	m		25
Dif. de nivel max.	m		10
Domeniul temperaturii de lucru	°C		16-31
Domeniul temperaturii ambientale	Exterior	°C	Racire:0-53/Incalzire:-20-30
	Interior	°C	Racire:17-32/Incalzire:0-30
Dimensiuni nete	Interior	mm	700x255x190
(W x H x D)	Exterior	mm	715x240x492
Masa neta	Interior	kg	6.5
	Exterior	kg	22
Dimensiuni de ambalare	Interior	mm	764×325×257
(W x H x D) w/o cond.	Exterior	mm	818×325×520
w/i conducta	Exterior	mm	818×325×520
Masa bruta	Interior	kg	8.5
	Exterior	kg	25(fara kit)/26(cu kit)

* Rata eficientei energetice pe sezon

**Coeficient de performanta pe sezon