



Encho Enchev - ETE Ltd.

Bulgaria, 5130 Dolna Oryahovitsa, 25 Dimitar Blagoev St
Tel: +359 6173 22 72; Mob: +359 882 279 759; +359 882 277 414
www.etebg.net ; e-mail: sales@etebg.net




TECHNICAL SPECIFICATION



of
Concrete products from high-performance concrete - elements
for landscaping streets, parks and gardens

1.Product -Concrete bench Model 198

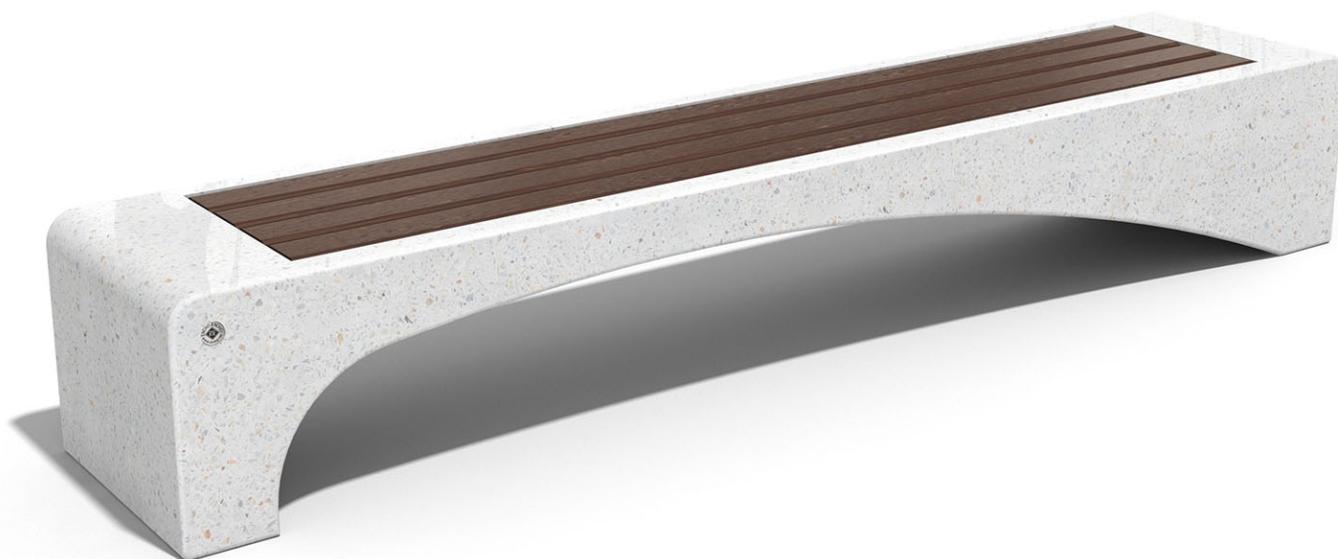



1. Description of the product

1.1 General description of the product:

Concrete bench made of polished, natural aggregate and high-performance fiber reinforced concrete. The aggregate structure consists of natural, crushed marble or granite stones of a strictly defined size and has the possibility of different color combinations. The bench is combined with certified softwood. In the concrete product there are specially constructed channels for free flowing of water and preventing the boards from rotting. The surfaces are further treated with a protective coating, which also has a self-cleaning effect.



1.2 Description of the main components of the product:

The concrete bench consists of: **1.** Concrete body; **2.** Planks; **3.** Marking logo;
(*Figure 1*)

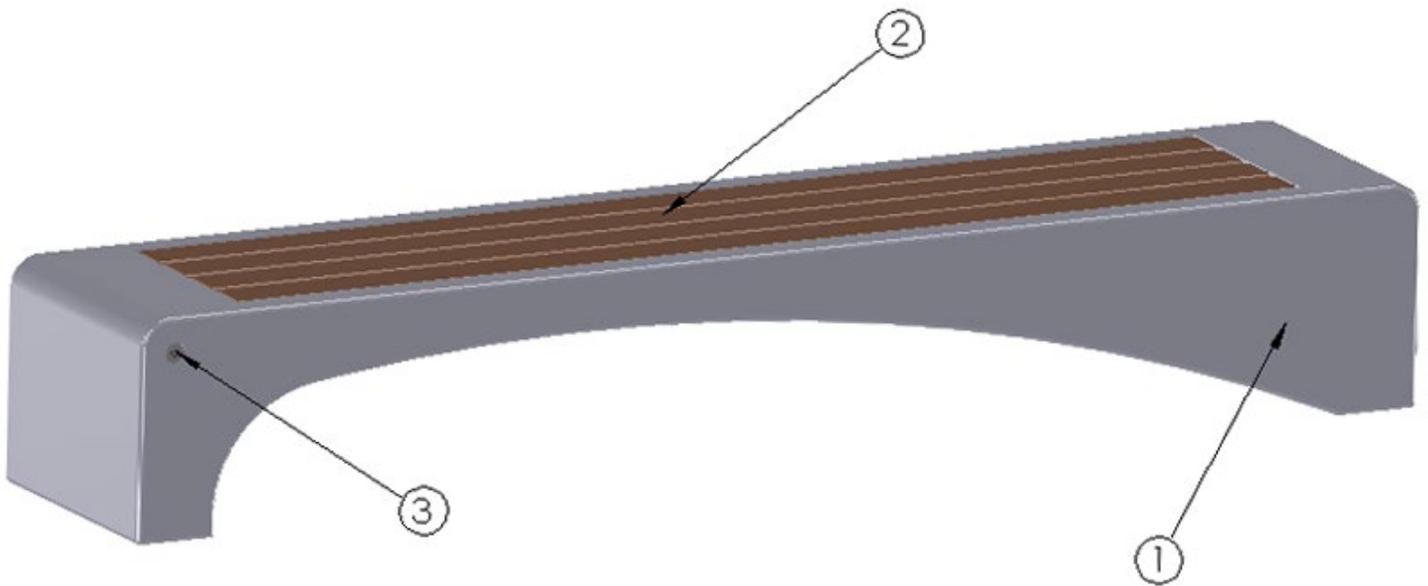


Figure 1



1.3 Description of the main materials of the product:

Concrete

High quality gray or white Portland cement is used in the production of the high-performance concrete (HPC) in combination with natural marble or granite aggregates and inert materials. The concrete structure is reinforced. Concrete is recyclable due to the absence of resins and adhesive polymeric agents.



Natural marble aggregates

The aggregates are a mixture of multi-colored, natural, marble or granite stone fractions with Portland cement and inert materials. The particles have selected structural characteristics and are available in various combinations with grey or white Portland cement, depending on their properties and requirements for the manufacture of the products. Polished structure of the aggregate.





Wood/Timber

Wood is a natural material and every beam/plank is not identical to the others, and there may be slight differences in the appearance of the woodthread, the tone and the natural imperfections, despite the processing. As the weather changes (hot climate, dry climate, humid climate, cold climate), the wood structure changes and can increase or decrease its volume, causing cracks or fissures. Although it is a natural process, it should be noted.

Spruce is offered as solid wood with a selected part of the structure of the tree. The wood is treated with high-performance impregnators and water-based varnishes that extend the life of the wood and slow down the aging of the material. This procedure does not cancel the subsequent periodic maintenance of the timber in order to keep its quality for as long as possible.

Color range is selected and ordered upon request by the customer and is available in the following options: pine color, walnut color, mahogany color, rosewood color, oak color.



Stainless steel

Encho Enchev - ETE uses AISI 304 stainless steel.

Marking logos and all fasteners used to assemble the product are made of stainless steel.

STAINLESS STEEL

#81



AISI 304



1.4 Technical description of the product:

Table 1: Technical description

Component	Dimensions	Material	Covering
Concrete body	L: 2300 mm B: 450 mm H: 400 mm	Concrete with marble or granite aggregates (terrazzo), Surface – polished	Varnish - gloss (EN 1504-2)
Planks (4 pieces)	L: 1900 mm B: 80 mm H: 43 mm	FSC certified soft spruce wood	Pigmented waterborne top coats(impregnator and varnish) (ISO 9001)
Marking logos	Ø: 33 mm	Stainless steel AISI 304	-
Fasteners (all bolts and plates)	-	Stainless steel AISI 304	-
General dimensions	L: 2300 mm B: 450 mm H: 400 mm Weight: 450 kg	-	-



1.4.1 Regulatory references applicable to products:

Table 2

EN 13198:2003; EN 13369:2019; EN 206:2013+A1:2016; EN 206:2013+A1:2016/ NA2017
EN 13043; EN 13139; EN 13242 EN ISO 9001:2015; EN ISO 14001:2015

1.4.2 Declared indicators of the characteristics of the concrete product:

Table 3

Characteristic	Indicator	Test/calculation/determination method
Tolerances in nominal dimensions	± 2%, Level I	
Corrosion resistance of reinforcement	B235-S235J	EN 13198:2003, EN ISO 15630-1-2004, BDS 4758:2008 / EN10025:2004
Minimum thickness of the concrete cover	100 mm	EN 13198:2003
Concrete strength class	C60/75	EN 12390-3:2019
Environmental impact classes	XC4, XS3, XD3, XF3, XA1	EN206:2013+A1:2016/NA:2017 item NA.5.3
Watertightness	C _w 1.0	EN206:2013+A1:2016/NA:2017 item NA.5.5.3.2
Frost resistance	C _{fr} 150	EN206:2013+A1:2016/NA:2017 item NA.5.5.5



2. Construction and production drawings for Concrete bench Model 198

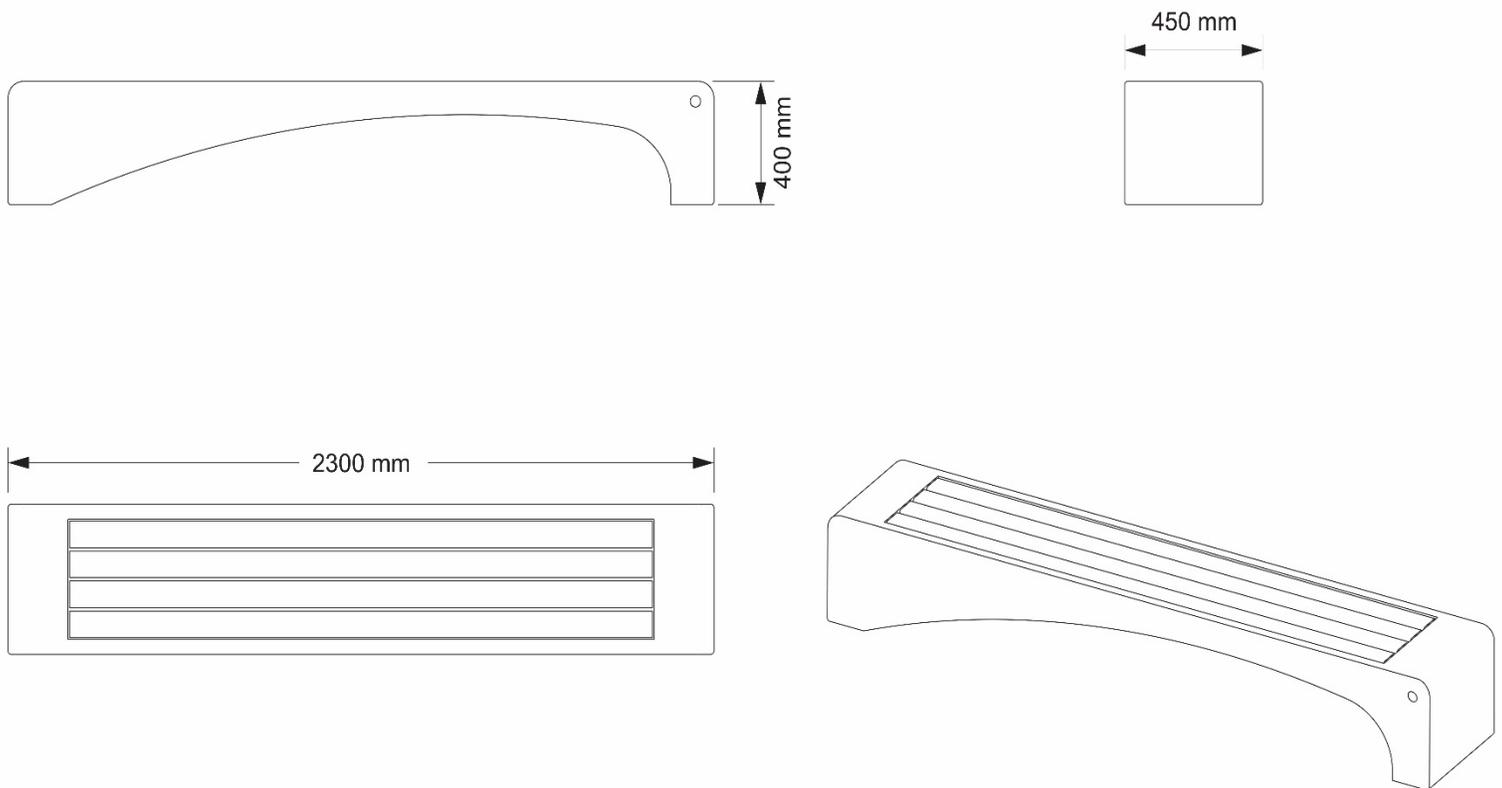


Figure 2



3. Intended use of the product

Application:

Ready-made concrete product for exterior and / or interior application in public and private areas for decorative design with practical and functional application on streets, parks, gardens, recreation areas and others. The concrete bench is designed and manufactured as an item for rest and relaxation, intended for use by a person in a sitting position. The product meets the requirements specified in standard EN 13198: 2013, EN 13369: 2019, EN 206: 2013 + A1: 2016 and is manufactured according to an assessed and certified production control system, in accordance with the requirements of EN ISO 9001: 2015 and for protection of the environment according to EN ISO 14001: 2015.

Note:

Any applications other than those specified, may result in damage to the integrity of the product as well as personal injury as a result of improper use.

The product should be serviced, cleaned and maintained by authorized persons.

Company Encho Enchev - ETE is not responsible for improper use and maintenance of the product.

Replaceable parts:

All components of the product listed in **Table 1** can be ordered from the company and replaced with new ones in case of failure.

Maintenance and support:

To keep the appearance of the product unchanged for a long period of time, we recommend that the products be cleaned. Recommendations for cleaning and maintenance can be found on the company's website.

Product recycling:

All materials used in the manufacture of this product are recyclable.



4. Additional information

This TECHNICAL DOCUMENTATION (SPECIFICATION) is issued entirely at the responsibility of the manufacturer and applies to concrete products manufactured according to an assessed and certified production control system, in accordance with the requirements of EN ISO 9001: 2015 and environmental protection requirements according to EN ISO 14001: 2015. These indicators are based on laboratory tests conducted by independent, certified laboratories.

-  25 Dimitar Blagoev str.,
Dolna Oryahovitsa, Bulgaria
-  +359 88 227 9759 / +359 88 227 7414
-  +359 6173 2272
-  sales@etebg.net
-  www.etebg.net

