877PA | 877PAY

Single piece, sterile, foldable aspheric hydrophobic acrylic intraocular lens (IOL) with UV blocker, optionally with blue light filter. The optic is monofocal. The IOL is available as part of a preloaded injector system.



POWER RANGE

Standard Powers

0.0 D → +9.0 D (1.0 D steps) +10.0 D → +30.0 D (0.5 D steps)

Extreme Powers

-10.0 D → -1.0 D (1.0 D steps) +31.0 D → +35.0 D (1.0 D steps)

MATERIAL

Hydrophobic acrylic with UV blocker and optional blue light filter

Refractive Index

1.47

Abbe Number

58

DESIGN

Optic Diameter Overall Diameter

6 mm

13 mm

Optic Design

Aspheric - Aberration Neutral Biconcave (-10.0 D → -1.0 D) Biconvex (0.0 D → +35.0 D)

Nominal A-constant

118.9

Haptic Design

Posterior vaulting fenestrated C-loops with 0° angulation

PCO Prevention

360° sharp edge

Shelf Life

2.5 years after sterilization

INJECTION

Estimated Incision Size

2.2 mm

Compatible Injector

POB-MA SINGLE-USE PRELOADED **INJECTOR**

CONSTANTS for optical and immersion ultrasound measurements

SRK/T A-Constant

Haigis

Hoffer Q

A = 118.9

a0 = 1.32 a1 = 0.4

a2 = 0.1

pACD = 5.46

Holladay I

Barrett Universal II

Holladay II

SF = 1.7

LF = 1.83

ACD = 5.49

SF = 1.73

877PA YELLOW IOL

877PAY

CLEAR IOL




The safety and performance of Medicontur IOLs have been tested in clinical investigations

and the clinical data demonstrate that these IOLs meet the requirements of the state of the art.

877PA | 877PAY

PRELOADED

B! POB-MA HYDROPHOBIC PRELOADED

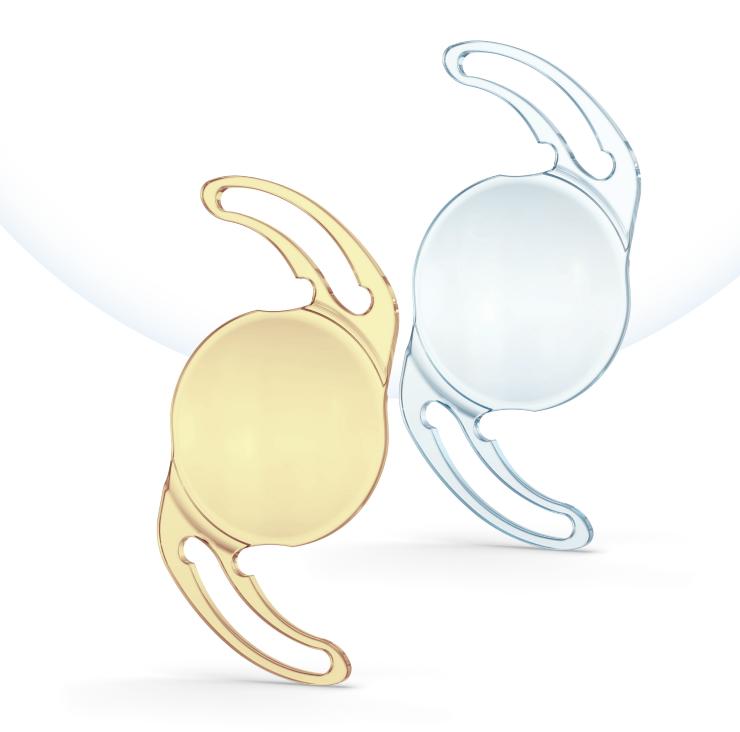









Medicontur

Medical Engineering Ltd export@medicontur.com www.medicontur.com

Head Office

Herceghalmi út 1. 2072 Zsámbék Hungary

International Office

Chemin du Champ-des-Filles 36 1228 Plan-les-Ouates Switzerland / Geneva