

THE NETHERLANDS
(N E D E R L A N D)

COMMUNICATION

Concerning ⁽¹⁾

- ~~approval granted~~
- approval extended
- ~~approval refusal~~
- ~~approval withdrawn~~
- ~~production definitely discontinued~~

of a type of tyre for motor vehicles pursuant to Regulation number 30.

Approval number: E4*30R02/22*125225*01

1. Manufacturer's name and address : ZODO TIRE CO., LIMITED
The South of Yalujiang Road, Wenzhuang Village Qinghe Agency of
Cao County Heze City
Shandong Province 274400
China (PRC)
2. Tyre type designation ⁽²⁾
 - 2.1. Brand-name(s)/trademark(s) : See annex 1 of communication form
 - 2.2. Trade description(s)/Commercial name(s) : See annex 1 of communication form
3. If applicable, name and address of the manufacturer's representative : Not applicable
4. Summarised description
 - 4.1. Tyre size designation : 235/55R19
 - 4.2. Category of use : ~~normal~~/snow/~~special use~~ / ~~temporary use~~ ⁽¹⁾
 - 4.3. Structure : ~~diagonal~~ / ~~bias belted~~ / radial/ ~~run flat tyre~~ ⁽¹⁾
 - 4.4. Speed category symbol : H
 - 4.5. Load-capacity index : 105

Approval number: E4*30R02/22*125225*01

- 4.6. Extended Mobility Tyre : ~~Yes~~ /No⁽¹⁾
5. Technical service and, where applicable, test laboratory approved for purposes of approval or of verification of conformity : IDIADA Automotive Technology S.A. Institute for Applied Automotive Research
L' Albornar P.O. Box 20
E-43710 Santa Oliva (Tarragona)
Spain
6. Date of report issued by that service : 2021-04-15
7. Number of report issued by that service : CN21040503
8. Reason(s) of extension (if applicable) : Update of tyre type designation(s)
Upgrade of regulation supplement number
9. Any remarks : Not applicable
10. Place : Zoetermeer
11. Date : 29 April 2021
12. Signature :


P. Lingsma

13. The list of documents in the approval file which are deposited at the administrative service having delivered the approval and which can be obtained upon request.
- Application form relating to ECE approval for a pneumatic tyre pursuant to Regulation number 30.
 - The drawing of the tyre's sidewalls, tread and dimensioned cross-section.
 - The test report as mentioned in item 7.

⁽¹⁾ Strike out what does not apply

⁽²⁾ A list of Brand name(s)/trademark(s) or Trade description(s)/Commercial name(s) may be annexed to this communication

Approval number: E4*30R02/22*125225*01

Annex 1

2. Tyre type designation

2.1. Brand-name(s)/trademark(s):

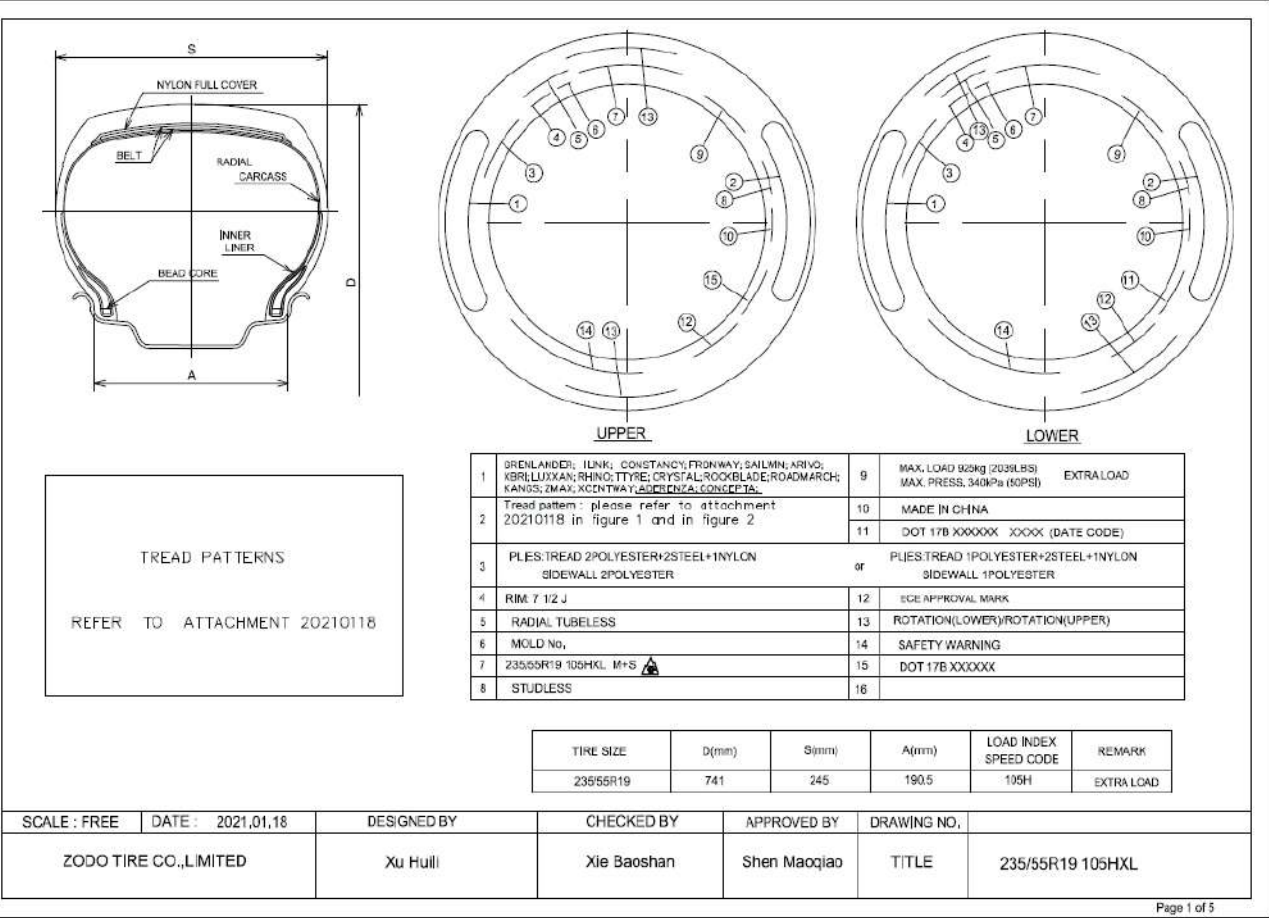
GRENLANDER; ILINK; CONSTANCY; FRONWAY; SAILWIN; ARIVO; XBRI; LUXXAN; RHINO; T TYRE; CRYSTAL; ROCKBLADE; ROADMARCH; KANGS; ZMAX; XCENTWAY; ADERENZA; CONCEPTA

2.2. Trade description(s)/Commercial name(s):

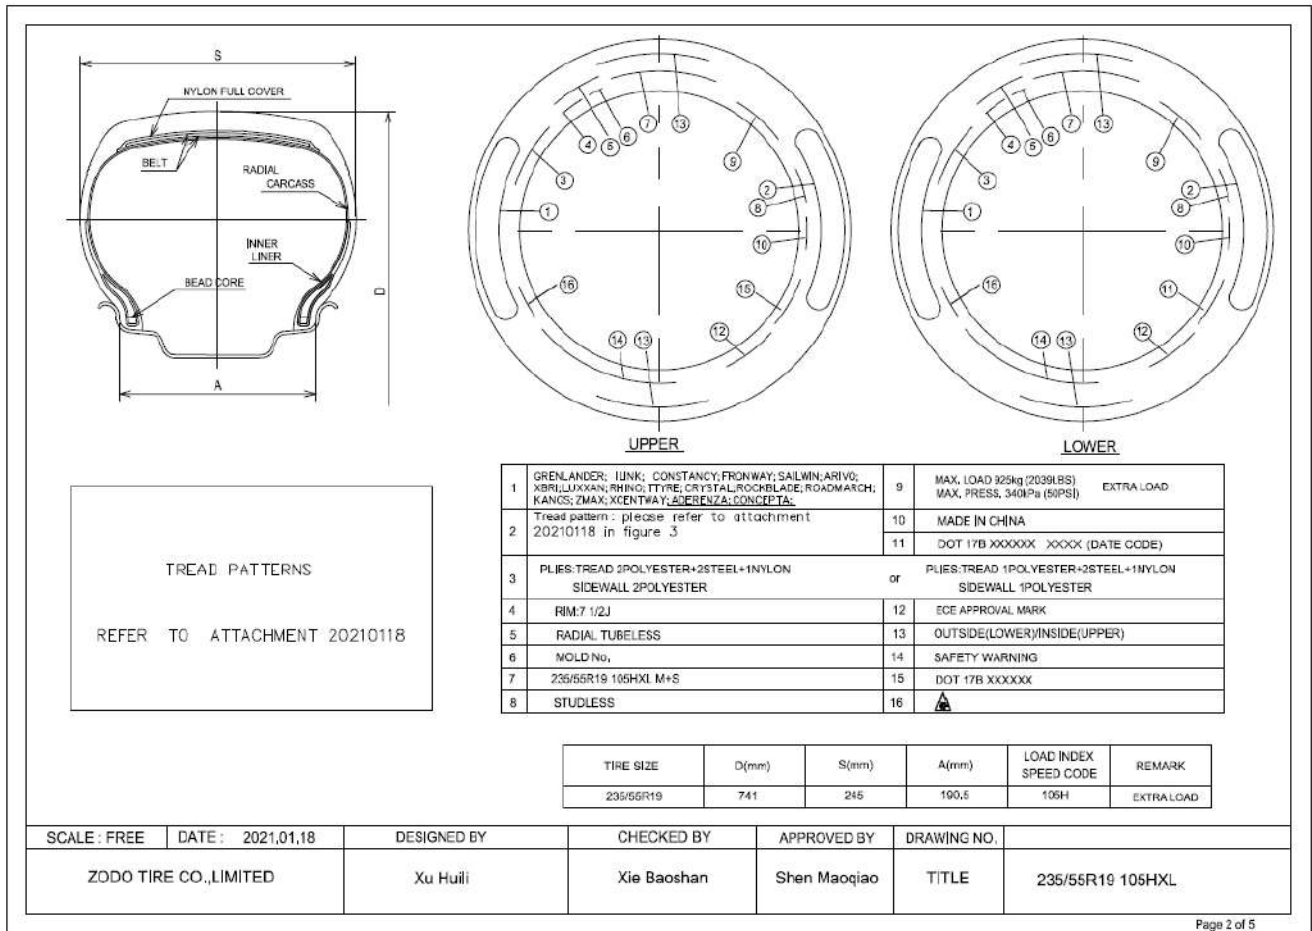
GREENWING A/S; MULTIMATCH A/S; FRONWING A/S; FREIMATCH A/S; Carlorful A/S; PRIME A/S; ROCK A/S ONE; FORTY ONE; INSPIRER A/S 1; X-SPIDER A/S; MAHO 79; POWERCITY 79; ROADPOWER H/T 79; SAILKING H/T79; TRAVERSO ARV H/T; INSPIRER F6; ROCK 719H/T; PRIMEMARCH H/T 79; GALLOPRO H/T; Fortuner801; ENDURANCE H/T D2; ICEHAWKE II; SNOWGRIPPER II; ICEMASTER II; SNOWHAWKEII; Winmaster ProX ARW5; SNOWPLORER II; ICECRUISER II; Winter Xpro 999; WINTERHAWKEII; POLARICE; Winter GL868; Winter IL868; LY868; ICEPOWER 868; ICEWINNER 868; WINMASTERARW2; ROCK 868S; THIRTY TWO; SNOWROVER868; COMMANDER W7; ICEPIONEER 868; ICEHAWKE I; SNOWGRIPPER I; ICEMASTER I; SNOWHAWKE I; Winmaster ProX ARW3; SNOWPLORER I; ICECRUISER I; Winter Xpro 888; WINTERHAWKE I; POLARSNOW; MAHO 77; POWERCITY 77; TOPOWER 87 H/T; ROADPOWERH/T; ROADKING H/T; Maxim; TERRANO ARV H/T; FORZA H/T 2; INSPIRER F4; TWENTY TWO; ROCK717 H/T; PRIMEMARCH H/T 77; MAGA A/T TWO; FORZA A/T 2; TERRAMAX LSR2 A/T; TERRAXPLORER C2 A/T; GLADIATAX A/T II; ROCKBLADEA/T II; TERRAMAX ARV PRO A/T; INSPIRER A/T II; TOUGH TRAC A/T II; ROCK 737 A/T; PRIMEMAX A/TII; CAPACITY; CLIMBER A/T; DREAMWIND A/T; OPENLAND A/T D2

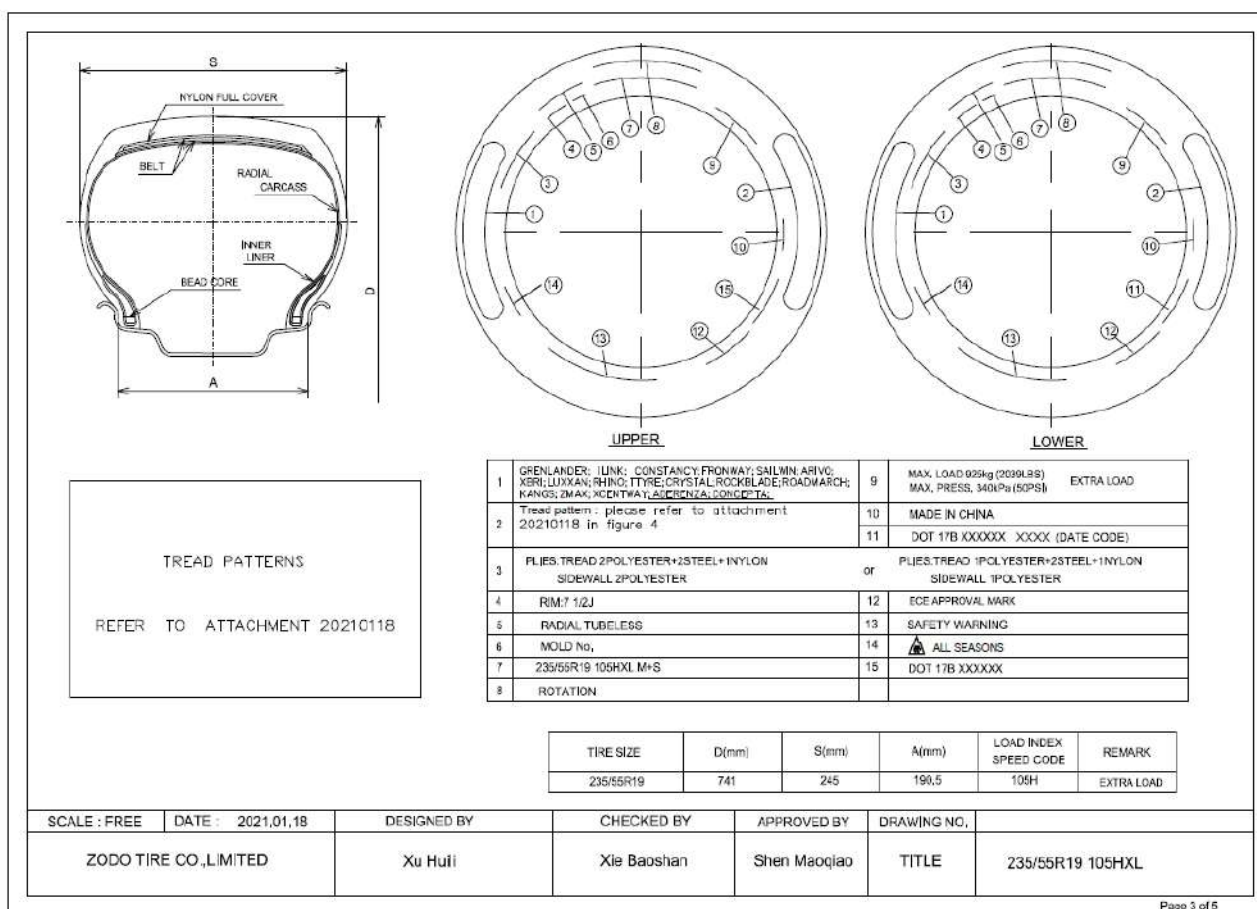


APPENDIX 1. CONSTRUCTION IMAGE (1)

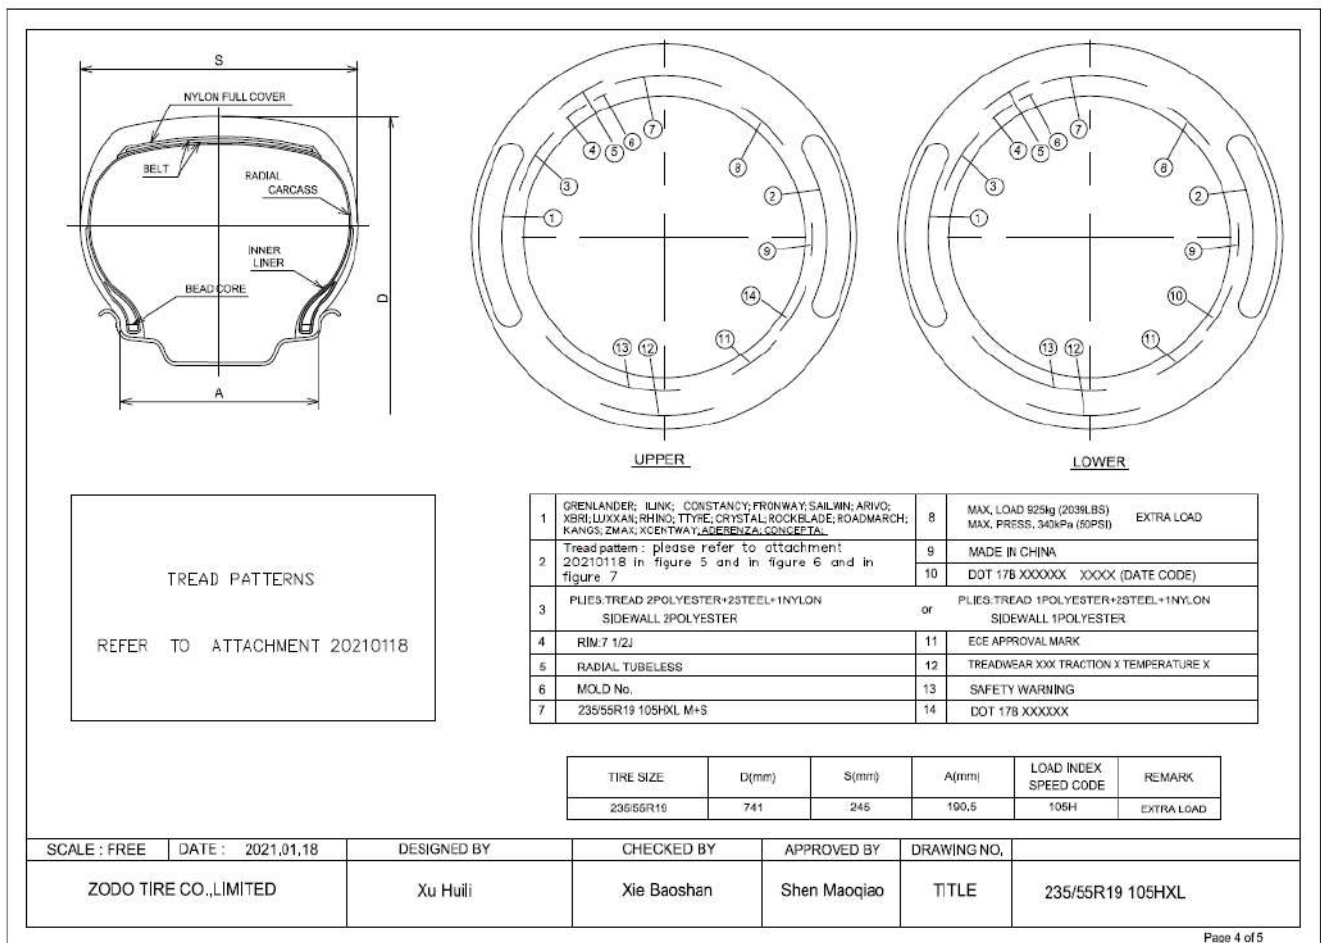


(1) The tyre marking statements are considered leading in case of deviating drawing information.

APPENDIX 2. CONSTRUCTION IMAGE ⁽¹⁾⁽¹⁾ The tyre marking statements are considered leading in case of deviating drawing information.








APPENDIX 3. CONSTRUCTION IMAGE ⁽¹⁾

⁽¹⁾ The tyre marking statements are considered leading in case of deviating drawing information.

APPENDIX 4. CONSTRUCTION IMAGE ⁽¹⁾

⁽¹⁾ The tyre marking statements are considered leading in case of deviating drawing information.

APPENDIX 5. CONSTRUCTION IMAGE ⁽¹⁾

TIRE SIZE 235/55R19 105HXL		ATTACHMENT 20210118			
Figure 1	Figure 2	Figure 3	Figure 4	Figure 5	
 <p>ICEHAWK I, SNOWGRIPPER II; ICEMASTER I, SNOWHAWK I; Winmaster ProX ARW3; SNOWPLOTTER II; ICEGRUISER II; Winter Xpro 888; WINTERHAWK I, POLARISNOW;</p>	 <p>ICEHAWK II, SNOWGRIPPER II; ICEMASTER II, SNOWHAWK II; Winmaster ProX ARW3; SNOWPLOTTER II; ICEGRUISER II; Winter Xpro 999; WINTERHAWK II, POLARICE;</p>	 <p>Winter GL688/Inter 3L668; LYNCE/ICEPOWER 868; DEVONDR 868/INMASTER ARW3; ROCK 868/IMPACT T40; SNOWPROX 868/CHANDLER W7; ICEPIEDER 868;</p>	 <p>GREENWING A/S; MULTIMATCH A/S; FRONWING A/S, FREINATCH A/S; GRIOTULI A/S, PRIME A/S; ROCK A/S ONE, FORTY ONE; INSPIRER A/S II; X-SPIDER A/S;</p>	 <p>MAHO 77, POWERCITY 77; TOPPOWER 87 H/T; ROADPOWER H/T; ROADWING H/T, MAGNUM; TERRAX A/T H/T; FORZA A/T 2; INSPIRER F4; TWINITY TWO; ROCK 717 H/T; PRIMEWARCH A/T 77;</p>	
Figure 6	Figure 7				
 <p>MAHO 79, POWERCITY 79; ROADPOWER H/T 79; SAILING H/T 79; TRAVENSO ARV H/T; INSPIRER F5, ROCK 719 H/T; PRIMEWARCH H/T 79; GALLPRO H/T, FORTNER 801; ENDURANCE H/T 02;</p>	 <p>MAGA A/T TWO, FORZA A/T 2; TERRAMAX LSR2 A/T; TERRA XPLOER C2 A/T; GLADIATOR A/T II, ROCKBLADE A/T II; TERRAMAX ARV PRO A/T; INSPIRER A/T II, TOUGH TRAC A/T II; ROCK 737 A/T, PRIMEWARCH A/T II; CAPACITY, CUMBER A/T II; DEANWIND A/T; DEANLAND A/T 02;</p>				
6 TREAD WEAR INDICATORS EQUALLY SPACED					
DRAWN BY	Xu Huli	CHECKED BY	Xie Baoshan	APPROVED BY	Shen Maoqiao
					ZODD TIRE CO., LIMITED

⁽¹⁾ The tyre marking statements are considered leading in case of deviating drawing information.

Test report data delivered by the designated technical service or its laboratory/branch office responsible for conducting the approval tests

Tested in accordance to ECE regulation no. 30, 02 series of amendments, supplement 22

Test reports	:	<table><tr><th>Date of report</th><th>Startdate of tests</th><th>Location of test</th><th>Reference</th></tr><tr><td>2021-04-15</td><td>2020-05-29</td><td>Heze, China</td><td>CN21040503</td></tr></table>	Date of report	Startdate of tests	Location of test	Reference	2021-04-15	2020-05-29	Heze, China	CN21040503
Date of report	Startdate of tests	Location of test	Reference							
2021-04-15	2020-05-29	Heze, China	CN21040503							
Appropriate test facility, calibrated measurement- and test equipment have been used in compliance with the applicable test requirements	:	Y								
Name and address of designated technical service	:	IDIADA Automotive Technology S.A.Institute for Applied Automotive Research L' Albornar P.O. Box 20 E-43710 Santa Oliva (Tarragona) Spain								
Name and address of branch office of designated technical service	:	N.A.								
Tyre size designation	:	235/55R19								
Brand-name(s) / trademark(s)	:	GRENLANDER, ILINK, CONSTANCY, FRONWAY, SAILWIN, ARIVO, XBRI, LUXXAN, RHINO, T TYRE, CRYSTAL, ROCKBLADE, ROADMARCH, KANGS, ZMAX, XCENTWAY, ADERENZA, CONCEPTA								
Trade description(s) / commercial name(s)	:	GREENWING A/S, MULTIMATCH A/S, FRONWING A/S, FREIMATCH A/S, Carlorful A/S, PRIME A/S, ROCK A/S ONE, FORTY ONE, INSPIRER A/S 1, X-SPIDER A/S, MAHO 79, POWERCITY 79, ROADPOWER H/T 79, SAILKING H/T79, TRAVERSO ARV H/T, INSPIRER F6, ROCK 719H/T, PRIMEMARCH H/T 79, GALLOPRO H/T, Fortuner801, ENDURANCE H/T D2, ICEHAWKE II, SNOWGRIPPER II, ICEMASTER II, SNOWHAWKEII, Winmaster ProX ARW5, SNOWPLOTTER II, ICECRUISER II, Winter Xpro 999, WINTERHAWKEII, POLARICE, Winter GL868, Winter IL868, LY868, ICEPOWER 868, ICEWINNER 868, WINMASTERARW2, ROCK 868S, THIRTY TWO, SNOWROVER868, COMMANDER W7, ICEPIONEER 868, ICEHAWKE I, SNOWGRIPPER I, ICEMASTER I, SNOWHAWKE I, Winmaster ProX ARW3, SNOWPLOTTER I, ICECRUISER I, Winter Xpro 888, WINTERHAWKE I, POLARSNOW, MAHO 77, POWERCITY 77, TOPOWER 87 H/T, ROADPOWERH/T, ROADKING H/T, Maxim, TERRANO ARV H/T, FORZA H/T 2, INSPIRER F4, TWENTY TWO, ROCK717 H/T, PRIMEMARCH H/T 77, MAGA A/T TWO, FORZA A/T 2, TERRAMAX LSR2 A/T, TERRAXPLORER C2 A/T, GLADIATAX A/T II, ROCKBLADEA/T II, TERRAMAX ARV PRO A/T, INSPIRER A/T II, TOUGH TRAC A/T II, ROCK 737 A/T, PRIMEMAX A/TII, CAPACITY, CLIMBER A/T II, DREAMWIND A/T, OPENLAND A/T D2								
Category of use	:	Snow								
Structure	:	Radial								
EMT (Extended Mobility Tyre)	:	N								
Speed category symbol	:	H								
Load capacity index	:	105								
Protective rib	:	N								
Tubeless	:	Y								
Standard / reinforced / T-type temporary use	:	Reinforced								
Ply-rating number of diagonal (bias-ply) tyres	:	N.A.								
Factor 'x'	:	0.7								
Maximum speed for speed symbol Y for load rating determination	:	N.A.								
Tread-wear indicators	:									
Height of lowest tread-wear indicator	:	1.97 mm								
Height of tallest tread-wear indicator	:	2.04 mm								
Number of transverse rows of wear indicators	:	6								
Special use tread pattern features	:	N.A.								

1 Test data

1.1 MEASURING DATA (ACCORDING TO ANNEX 6)

1.1.1	Measuring rim width	:	7.5 inch
1.1.2	Conditioning		
	Mounting pressure	:	3.0 bar
	Adjusted pressure	:	2.2 bar
	Conditioning time	:	24 hrs
	Test room temperature	:	28.0 °C
	Readjusted pressure	:	2.2 bar
1.1.3	Measurements		
	Overall width measured	:	243.9 mm
	Calculated outer diameter	:	743.9 mm
1.1.4	Plies of tyre subject for type approval	:	N.A.

1.2 LOAD SPEED PERFORMANCE TEST (ACCORDING TO ANNEX 7)

1.2.1	Reference is made to a worst case tyre out of the tyre range	:	N
1.2.2	Test setup		
	Test drum diameter	:	1.70 m
	Test rim width	:	7.5 inch
	Test axle load	:	740 kg
1.2.3	Conditioning		
	Test inflation pressure	:	3.2 bar
	The test inflation pressure differs from those given under Annex 7 paragraph 1.2	:	N
	Conditioning time	:	3 hrs
	Test room temperature	:	28.0 °C
	Readjusted pressure	:	3.2 bar
1.2.4	Outer diameter before test	:	744.84 mm
1.2.5	Test procedure		
	Time from zero to initial test speed	:	10 min
	Test steps	:	

Step	Duration (min)	Speed (km/h)
1.	10	170
2.	10	180
3.	10	190
4.	20	200

1.2.6	Test results		
	Traces of tread separation, ply separation, cord separation, chunking or broken cords after the load/speed test	:	N
	Superficial blistering after the load/speed test caused by the specific test equipment and conditions	:	N
	Conditioning time after test	:	6 hrs
	Calculated outer diameter of measured circumference after test	:	746.12 mm
	Change in outer diameter after test	:	0.17 %

2 TYRE MARKINGS STATEMENT ⁽¹⁾

2.1	Brand name or trade mark	: Marked
2.2	Trade description / commercial name	: Marked
2.3	Date of manufacture	: Marked
	- character height ≥ 4 mm	: Y
2.4	Upper side wall markings	
	"TEMPORARY USE ONLY"	: N.A.
	"INFLATE TO 420kPa (60 psi)"	: N.A.
2.5	Lower side wall markings	
	Approval mark in accordance to article 3.2, 3.4, 5.4 and Annex 2	: Y
	Tyre structure letter code	: R
	Tyre to rim fitment code	: N.A.
	Service description	
	- marked within brackets	: N.A.
	- immediately after tyre size designation	: Y
	- character height ≥ 6 mm	: Y
	"RADIAL"	: Marked
	- character height ≥ 4 mm	: Y
	"B" and "BIAS BELTED"	: N.A.
	"TUBELESS"	: Marked
	- character height ≥ 4 mm	: Y
	Run flat symbol	: N.A.
	EMT (Extended mobility tyre) symbol	: N.A.
	"REINFORCED" or "EXTRA LOAD"	: Marked
	- character height ≥ 4 mm	: Y
	"M+S"/"M.S"/"M&S"	: Marked
	- character height ≥ 4 mm	: Y
	"ET"	: N.A.
	"POR"	: N.A.
	Location of the applicable mandatory markings	: In lower area
	Symmetrical tyres marked on both sidewalls	: Y
	Asymmetrical tyres marked at least on the outer tyre side wall	: Y

3 Nominal envelop dimensions of the inflated tyre mounted on the measuring rim ⁽¹⁾

S	: 245 mm
D	: 741 mm
A	: 190.5 mm

⁽¹⁾ The tyre marking statements are considered leading in case of deviating drawing information.

APPLICATION FOR APPROVAL OF A TYPE OF PNEUMATIC TYRE FOR TYRES FOR MOTOR VEHICLES AND THEIR TRAILERS ACCORDING TO ECE REGULATION No. 30, 02 SERIES OF AMENDMENTS, SUPPLEMENT 22

4.1	Name and address of manufacturer (applicant)	: ZODO TIRE CO., LIMITED The South of Yalujiang Road, Wenzhuang Village Qinghe Agency of Cao County Heze City Shandong Province 274400 China (PRC)
	Name and address of branch office of designated technical service (manufacturers duly accredited representative)	: N.A.
4.1.1	Tyre size designation	: 235/55R19
4.1.2.1	Brand-name(s) / trademark(s)	: GRENLANDER, ILINK, CONSTANCY, FRONWAY, SAILWIN, ARIVO, XBRI, LUXXAN, RHINO, T TYRE, CRYSTAL, ROCKBLADE, ROADMARCH, KANGS, ZMAX, XCENTWAY, ADERENZA, CONCEPTA
4.1.2.2	Trade description(s) / commercial name(s)	: GREENWING A/S, MULTIMATCH A/S, FRONWING A/S, FREIMATCH A/S, Carlorful A/S, PRIME A/S, ROCK A/S ONE, FORTY ONE, INSPIRER A/S 1, X-SPIDER A/S, MAHO 79, POWERCITY 79, ROADPOWER H/T 79, SAILKING H/T79, TRAVERSO ARV H/T, INSPIRER F6, ROCK 719H/T, PRIMEMARCH H/T 79, GALLOPRO H/T, Fortuner801, ENDURANCE H/T D2, ICEHAWKE II, SNOWGRIPPER II, ICEMASTER II, SNOWHAWKEII, Winmaster ProX ARW5, SNOWPLOTTER II, ICECRUISER II, Winter Xpro 999, WINTERHAWKEII, POLARICE, Winter GL868, Winter IL868, LY868, ICEPOWER 868, ICEWINNER 868, WINMASTERARW2, ROCK 868S, THIRTY TWO, SNOWROVER868, COMMANDER W7, ICEPIONEER 868, ICEHAWKE I, SNOWGRIPPER I, ICEMASTER I, SNOWHAWKE I, Winmaster ProX ARW3, SNOWPLOTTER I, ICECRUISER I, Winter Xpro 888, WINTERHAWKE I, POLARISNOW, MAHO 77, POWERCITY 77, TOPOWER 87 H/T, ROADPOWERH/T, ROADKING H/T, Maxim, TERRANO ARV H/T, FORZA H/T 2, INSPIRER F4, TWENTY TWO, ROCK717 H/T, PRIMEMARCH H/T 77, MAGA A/T TWO, FORZA A/T 2, TERRAMAX LSR2 A/T, TERRAXPLOTTER C2 A/T, GLADIATAX A/T II, ROCKBLADEA/T II, TERRAMAX ARV PRO A/T, INSPIRER A/T II, TOUGH TRAC A/T II, ROCK 737 A/T, PRIMEMAX A/TII, CAPACITY, CLIMBER A/T II, DREAMWIND A/T, OPENLAND A/T D2
4.1.3	Category of use	: Snow
4.1.3.1	For the tyres belonging to the category of use "special use tyre" those which may bear the inscription M+S or M.S or M&S	: N.A.
4.1.4	Structure	: Radial
4.1.5	Speed category symbol	: H
4.1.6	Load capacity index	: 105
4.1.7	Tubeless	: Y
4.1.8	Standard / reinforced / T-type temporary use	: Reinforced
4.1.9	EMT (Extended mobility tyre)	: N
4.1.10	Ply-rating number of diagonal (bias-ply) tyres; except for T-type temporary use spare tyres	: N.A.
4.1.11	The overall dimensions: overall section width and outer diameter	
	Overall section width	: 243.9 mm
	Outer diameter	: 743.9 mm
4.1.12	The rims on which the tyre can be mounted	: 7.5 inch
4.1.13	Measuring rim	: 7.5 inch
	Test rim	: 7.5 inch
4.1.14	The test pressure where the manufacture requests the application of Annex 7 paragraph 1.3 to this Regulation	: N.A.
4.1.15	The factor 'x'	: 0.7
4.1.16	For tyres suitable for speeds in excess of 300 km/h, the maximum speed permitted by the tyre manufacturer and the load carrying capacity allowed for that maximum speed	: N.A.
4.1.17	The identification of the bead retention rim contours specific for the "flat tyre running mode" of "run flat tyres"	: N.A.
4.2	The application for approval is accompanied by drawings or images of	

	1. The tyre tread pattern	:	Y
	2. Envelope of the inflated tyre mounted on the measuring rim, showing the relevant dimensions (see paragraphs 6.1.1 and 6.1.2)	:	Y
	3. The side wall showing the relevant markings	:	Y
4.4	Reference to Worst-case tyre has been made for the load-speed test. The worst case tyre selection criteria can be obtained from the approval authority.	:	N

Reason(s) of extension : Update of tyre type designation(s);
Upgrade of regulation supplement number;

The applicant, as defined in article in 4.1, declares that:

- This application is in compliance with the scope as defined in chapter 1 of the regulation.
- All data for this application are unambiguously and truthfully given.
- This application has been submitted by the duly accredited representative of the manufacturer per art 4.1 of the regulation. The underlying statement to submit on behalf of the manufacturer can be presented upon request.
- The type approval application for the subject component is submitted only at RDW as Contracting party pursuant to this UN regulation.
- Appropriate test facility, calibrated measurement en test equipment have been used in compliance with the applicable test requirements.

Company : IDIADA Automotive Technology S.A.Institute for Applied Automotive Research

Name of person responsible for the submitted application data : Josep Masip Gomez

Function of above mentioned authorised person : DEPARTMENT MANAGER

E-mail address of department or above mentioned authorised person : QualityHomologations@idiada.com

Place of submission : L'Albornar, Santa Oliva (Tarragona)

Submitted for approval on (date) : 21/04/2021 11:04:36

Reference id of the application given by the applicant :