


TAIZHOU SHENMENG SANITARY
WARE CO.,LTD. Address: Bingang
Industry Area, Shamen, Yuhuan, Zhejiang, China.

SM021B; Forged brass ball valve FxM thread
with RAL3005 steel lever
handle from 1/2" to 2" and
RAL3005 Aluminium T handle
from 1/2" to 1".
EN 13828: 2003

ROTHEX

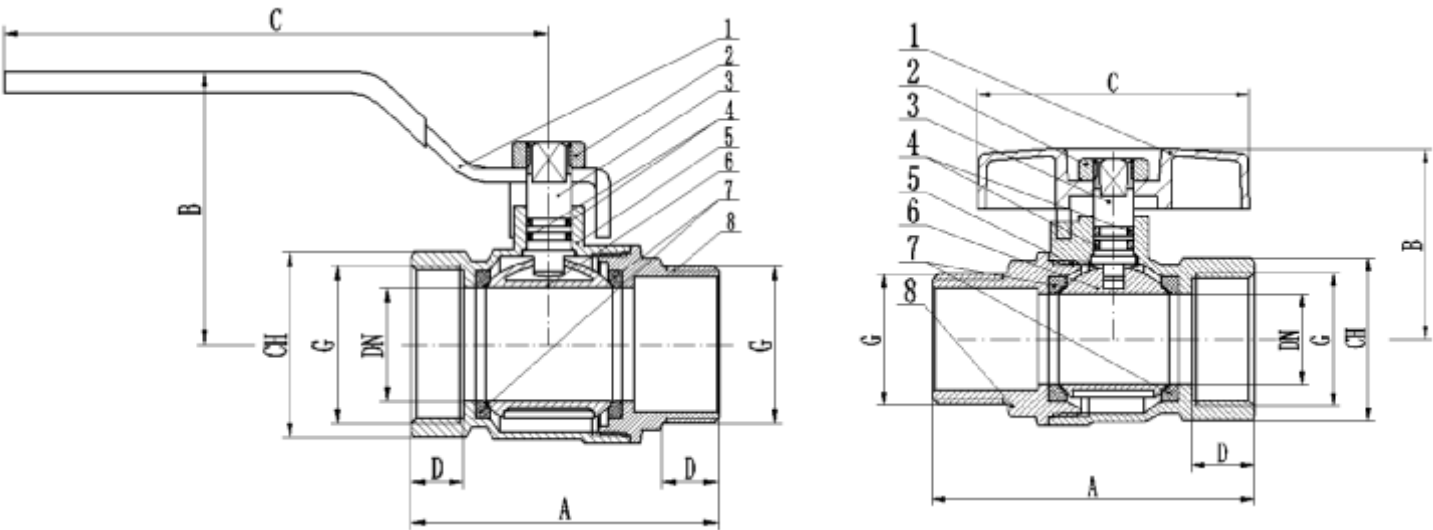

POS	Part name	Material
1	handel	Q235
2	hex nut	Q335
3	setm	HPb57-3
4	O-ring	NBR
5	body	HPb57-3
6	ball	HPb57-4
7	seal ring	PTFE
8	bonnet	HPb57-3

DN	G	CH	A	B	C	D	PN*	KV
15	1/2"	25	56.5	36	54	11.5	30	
18	3/4"	30.5	64	38	54	12.5	30	
24	1"	37.5	75.5	50	65	14	30	
30	1-1/4"	46.0	81.5	71.0	143.5	14.0	25.0	
37	1-1/2"	53.0	96.5	76.0	143.5	17.0	25.0	
47	2"	66.0	112.0	89.0	154.0	19.0	25.0	
62	2-1/2"	82.0				21.0	20.0	
73	3"	96.5				29.0	16.0	
99	4"	120.0				27.0	16.0	

PN*- for water at 25°C

SPECIFICATION 说明

SERIES系列	SM021B
THREAD ENDS	FEMALE-MALE 内牙-外牙
ORIFICE口径	from 15 mm to 99 mm
ACTUATOR操作	90° rotation with mechanical stop 90度旋转
OPERATOR	Butterfly handle蝶柄

APPLICATION应用

Assembly in rigid pipe system\Nominal pressure(PN) in bar
KV: flowrate coefficient m ^ 3/h
Direction of flow: os desired
Temperature range温度范围 : -20°C/+120°C