


REVISIONS			
SYM.	DESCRIPTION	DATE	APPROVAL
001	*****	***	***

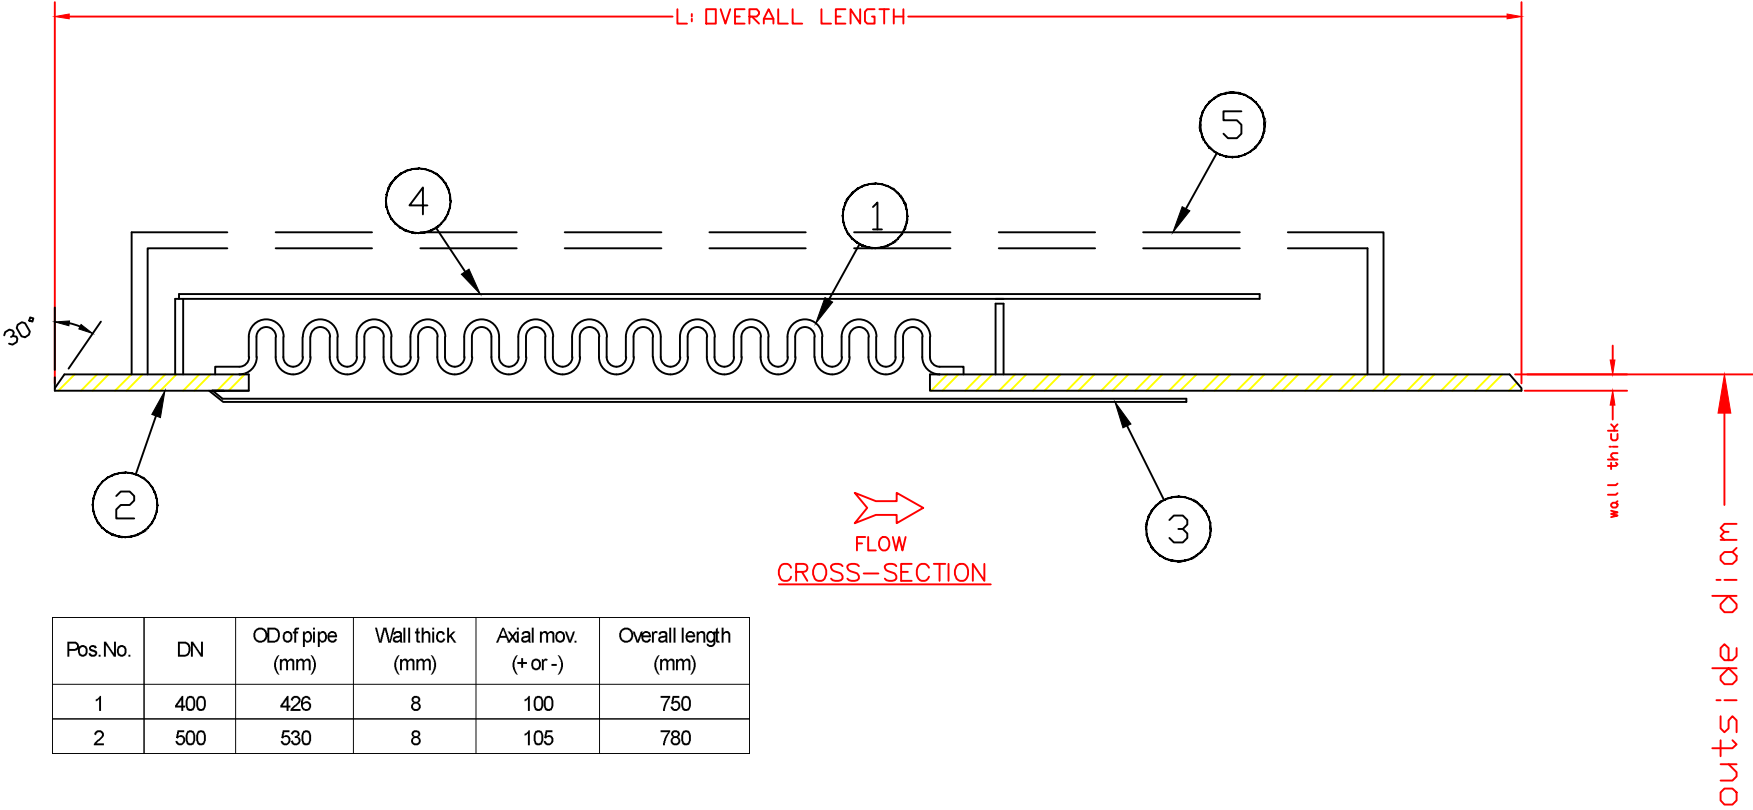

Pos.No.	DN	OD of pipe (mm)	Wall thick (mm)	Axial mov. (+ or -)	Overall length (mm)
1	400	426	8	100	750
2	500	530	8	105	780

- BOM:
- 1. AISI321 BELLOWS
  - 2. P265GH PLATE
  - 3. ST. STEEL LINER
  - 4. C. STEEL EXTERNAL COVER
  - 5. SHIPPING BARS

GENERAL TOLERANCES ARE ACC. TO EUMA STANDARDS 10th EDITION / DS EN ISO 13920-BF.  MACHINED AND OTHER DIMENSIONS TOLERANCES IN ACCORDANCE WITH EN ISO 2768-mK CLASS C  TOLERANCES OF FLANGE: ACC. to EN 1092-1:2018 Surface Finish For Jointing Faces Ra : min 3,2 - 12,5 µm		DESIGN : EUMA 10th Edition PRESSURE : 25 barg TEMPERATURE: 150°C MOVEMENTS: AXIAL : see table LATERAL : XX MM ANGULAR : XX DEG.			
		DN (size)-KB-KB-25-Length-KL-321		DWG No.	REV.
CAD  THIRD ANGLE PROJECTION ISO-A		DRAWN	BEDIHA TEZCAN	DATE	27. 01. 2026
		APPROVED	KASIF DEMET	DATE	27. 01. 2026
		SIZE	A4	SCALE	N/A
		SHEET	01	OF	00