

TD-4183



BLOOD GLUCOSE MONITORING SYSTEM



±15mg/dL & ±15%

FEATURES

- 20-65% HCT range
- Individual target range
- 400 memory sets

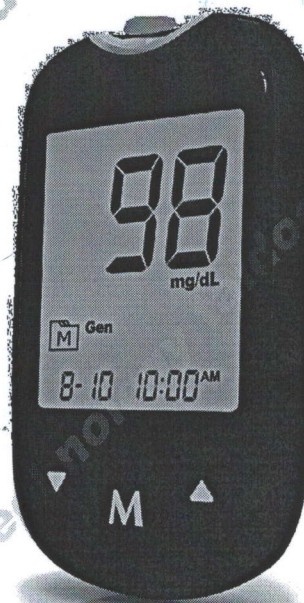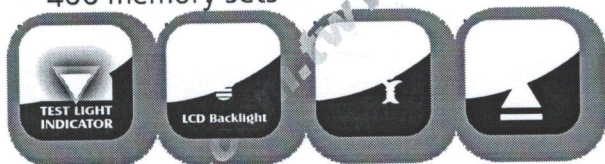

SPECIFICATIONS


Enzyme Type	GDH-FAD
Sample Size	0.5 µL
Reaction Time	≤ 6 seconds
Measurement Range	20 ~ 650 mg/dL (1.1 ~ 36.1 mmol/L)
Hematocrit Range	20% - 65%
Precision	SD < 5 mg/dL (0.278 mmol/L) at < 100 mg/dL (5.55 mmol/L); CV < 5% at 100 mg/dL (5.55 mmol/L)
Accuracy	±15 mg/dL if < 100 mg/dL; ±15% if ≥ 100 mg/dL
Ketone Warning	Yes
Communication	Strip Port Communication
Power Source	AAA x 1
Memory Capacity	400 sets
Day Average	7, 14, 21, 28, 60, 90 days
Daily Alarm	4 daily alarms
Dimension	90.3 (L) x 52.3 (W) x 18 (H) mm
Weight	46.4 g (without battery)
Operating Condition	10°C (50°F) ~ 40°C (104°F), 10% ~ 85% R.H
Storage Condition	-20°C (-4°F) ~ +60°C (140°F) (Meter); 2°C (35.6°F) ~ 30°C (86.0°F) (Strip)

SHIPPING INFO

Units per Carton	40
Gross Weight per Carton	12.8 kg
Carton Size	49.8 (L) x 35.8 (W) x 36 (H) cm

Accessories

Model	Specification
BG-ACC-001	Bluetooth dongle
BG-ACC-002	USB cable

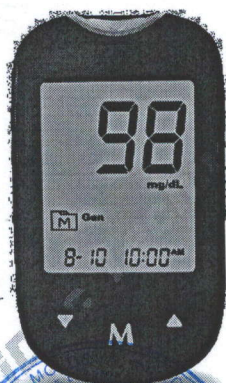

TaiDoc



www.taidoc.com

TaiDoc Technology Corp.

B1-7F., No.127, Wugong 2nd Rd., Wugu Dist.,
New Taipei City 24888, Taiwan

Tel : +886-2-6625-8188 Fax : +886-2-6625-0288