





Covered single
stent design



58% greater
flexibility



Low crossing profile




Technical data /
ordering info

Vascular Intervention // **Coronary**
Covered Coronary Stent System

BIO **BIOTRONIK**
excellence for life


PK Papyrus

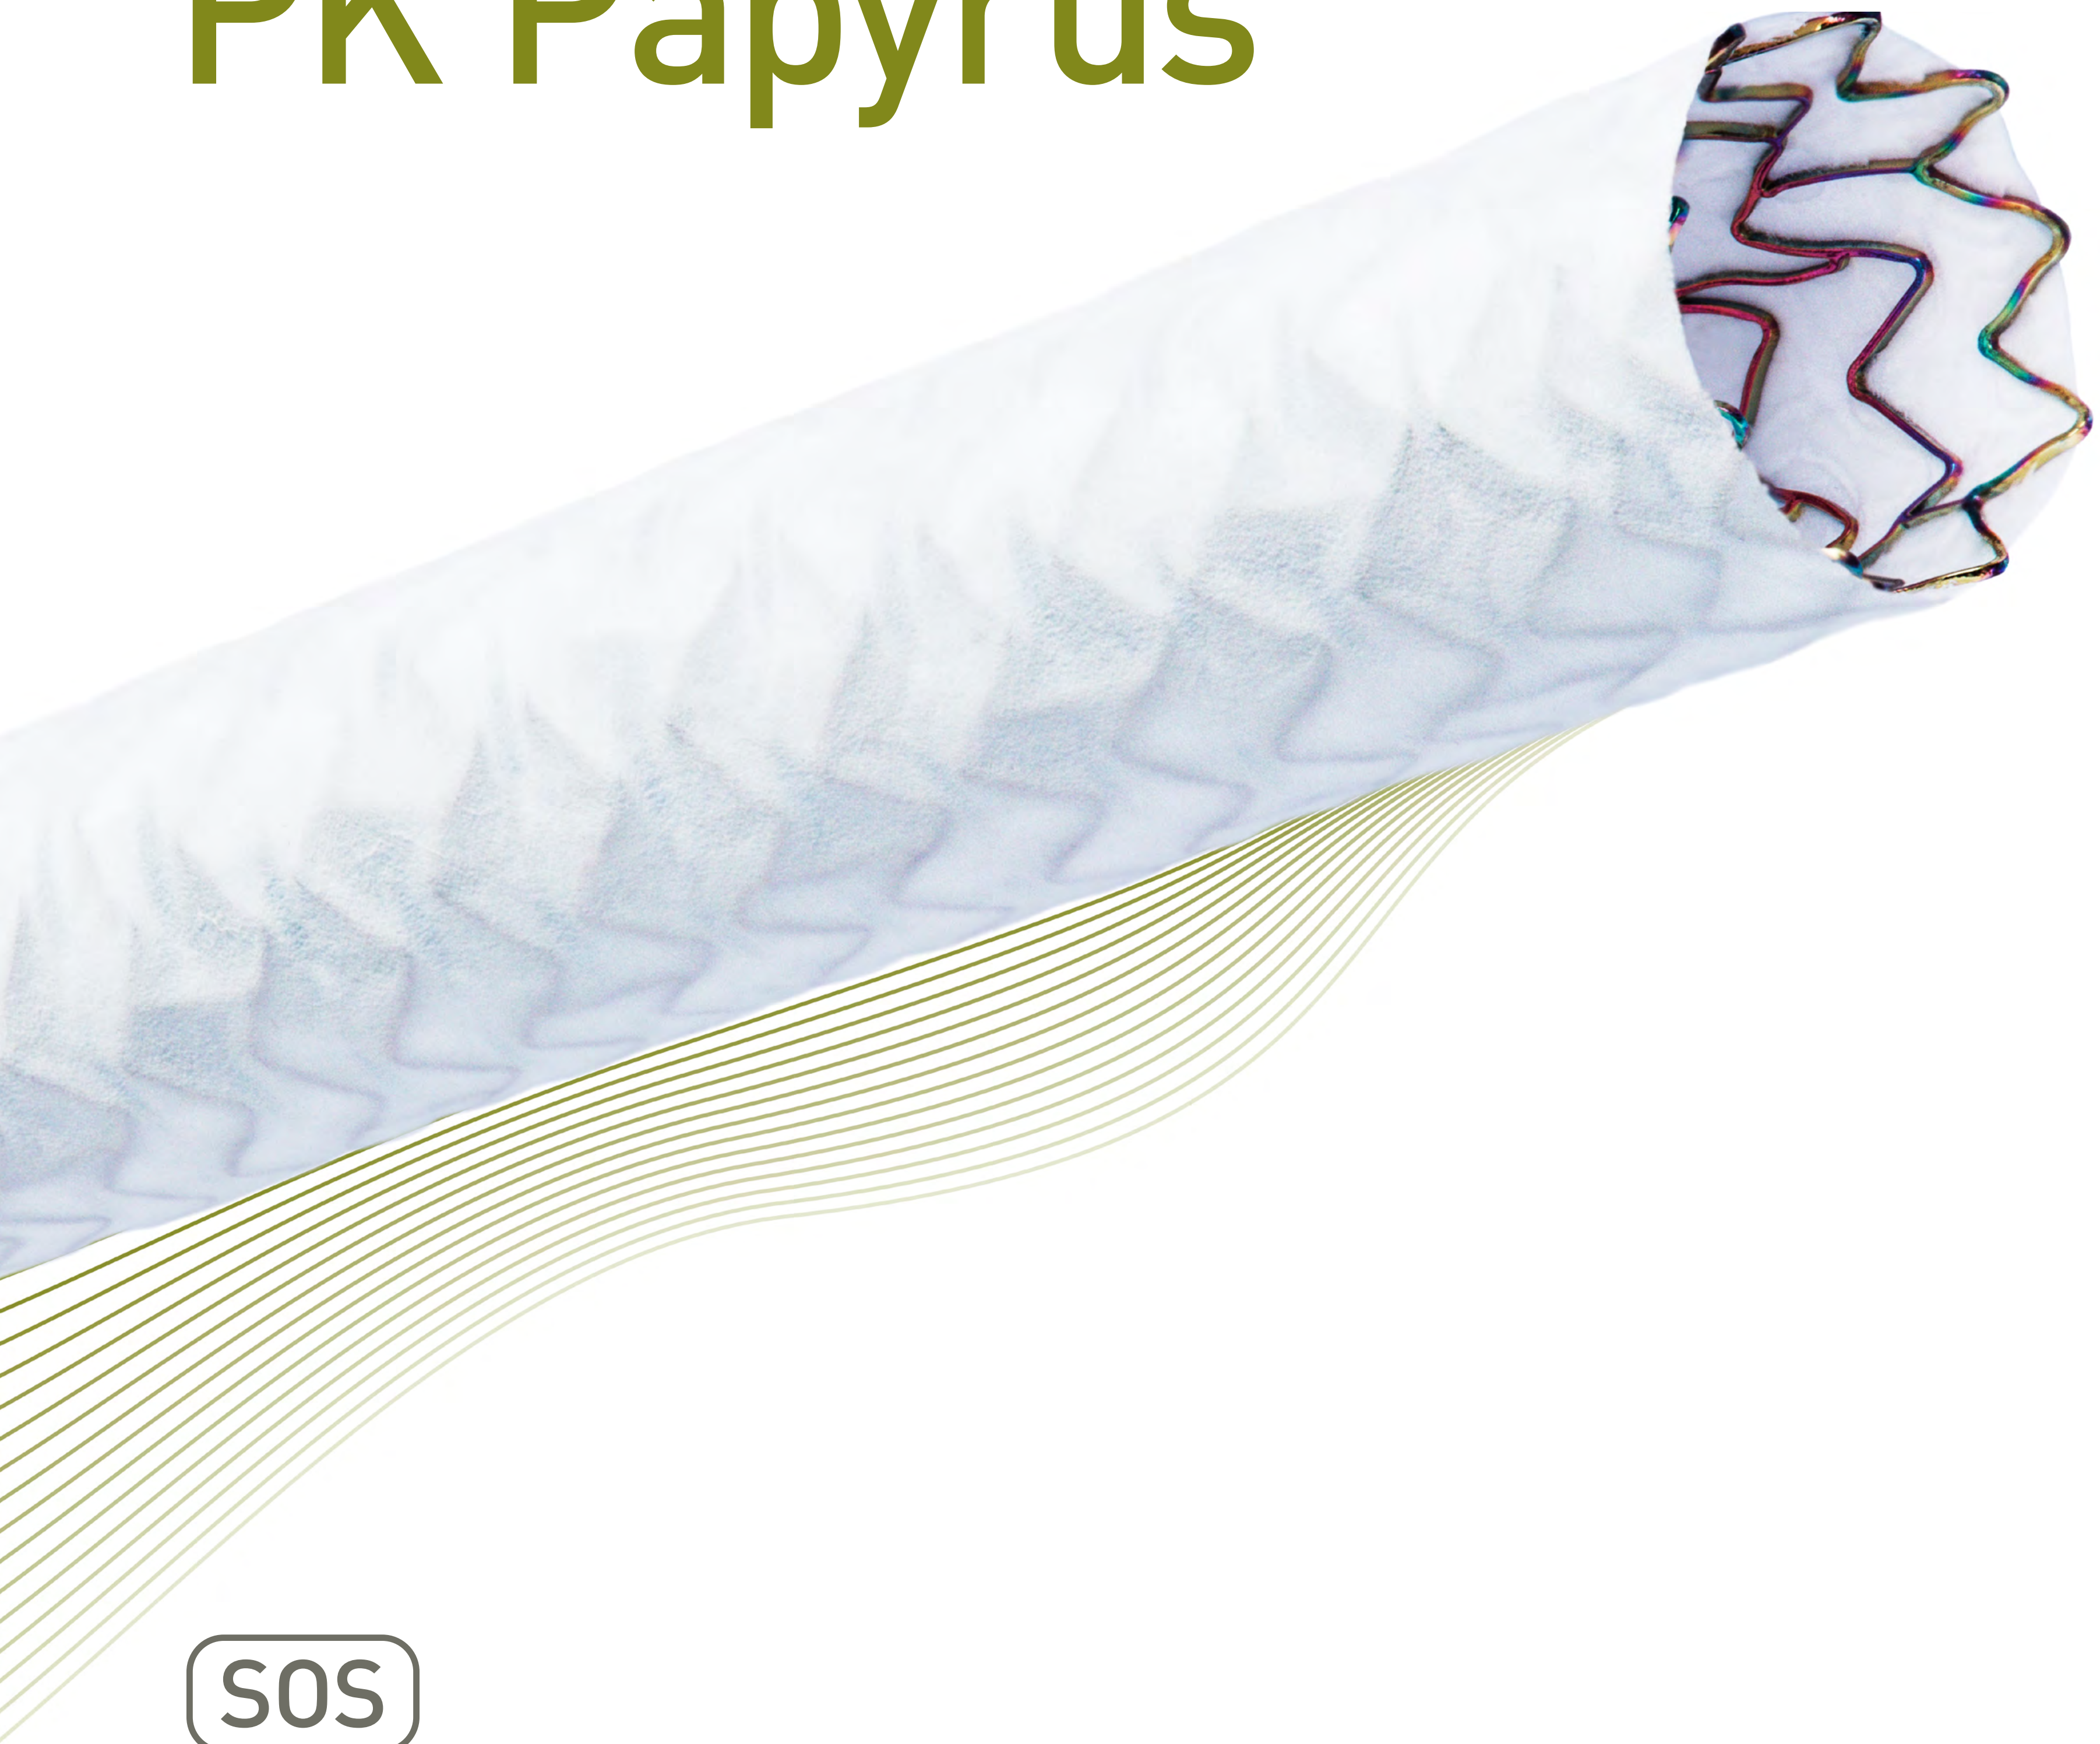

SOS

Covered single stent design

With its covered single stent design, PK Papyrus achieves greater bending flexibility and a smaller crossing profile compared to the traditional sandwich design stent¹, allowing you to seal perforations with confidence.

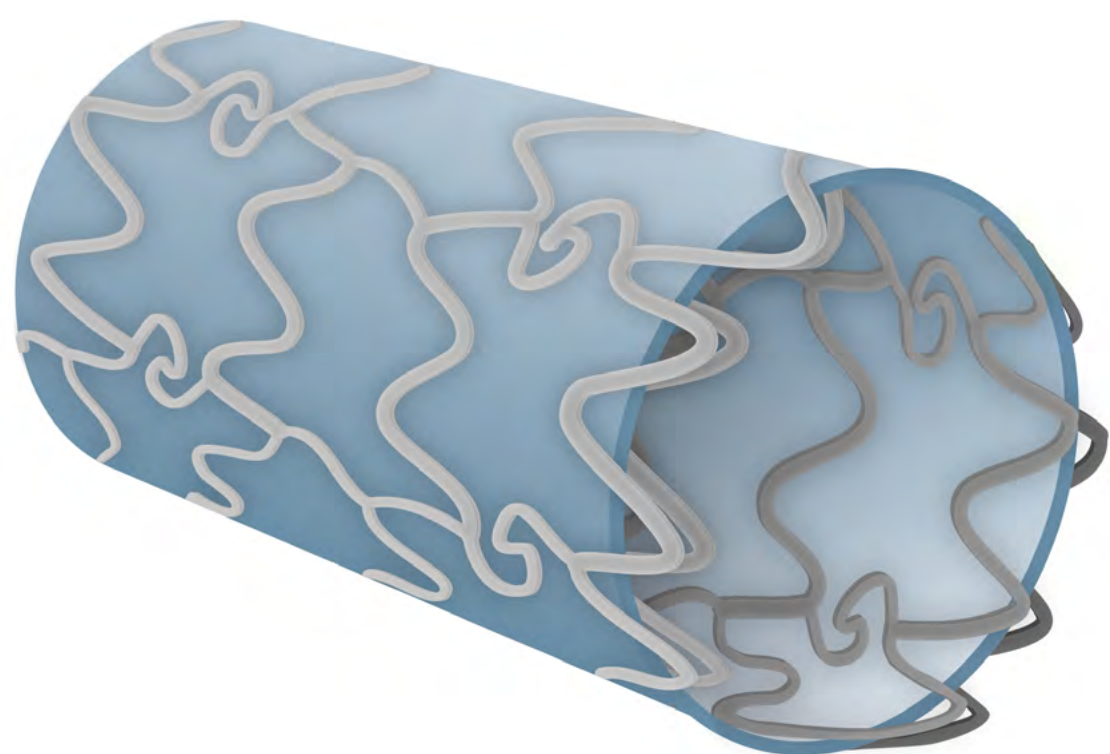


Traditional sandwich design stent¹



PK Papyrus
Covered single stent design



23%
reduction
in crossing
profile²

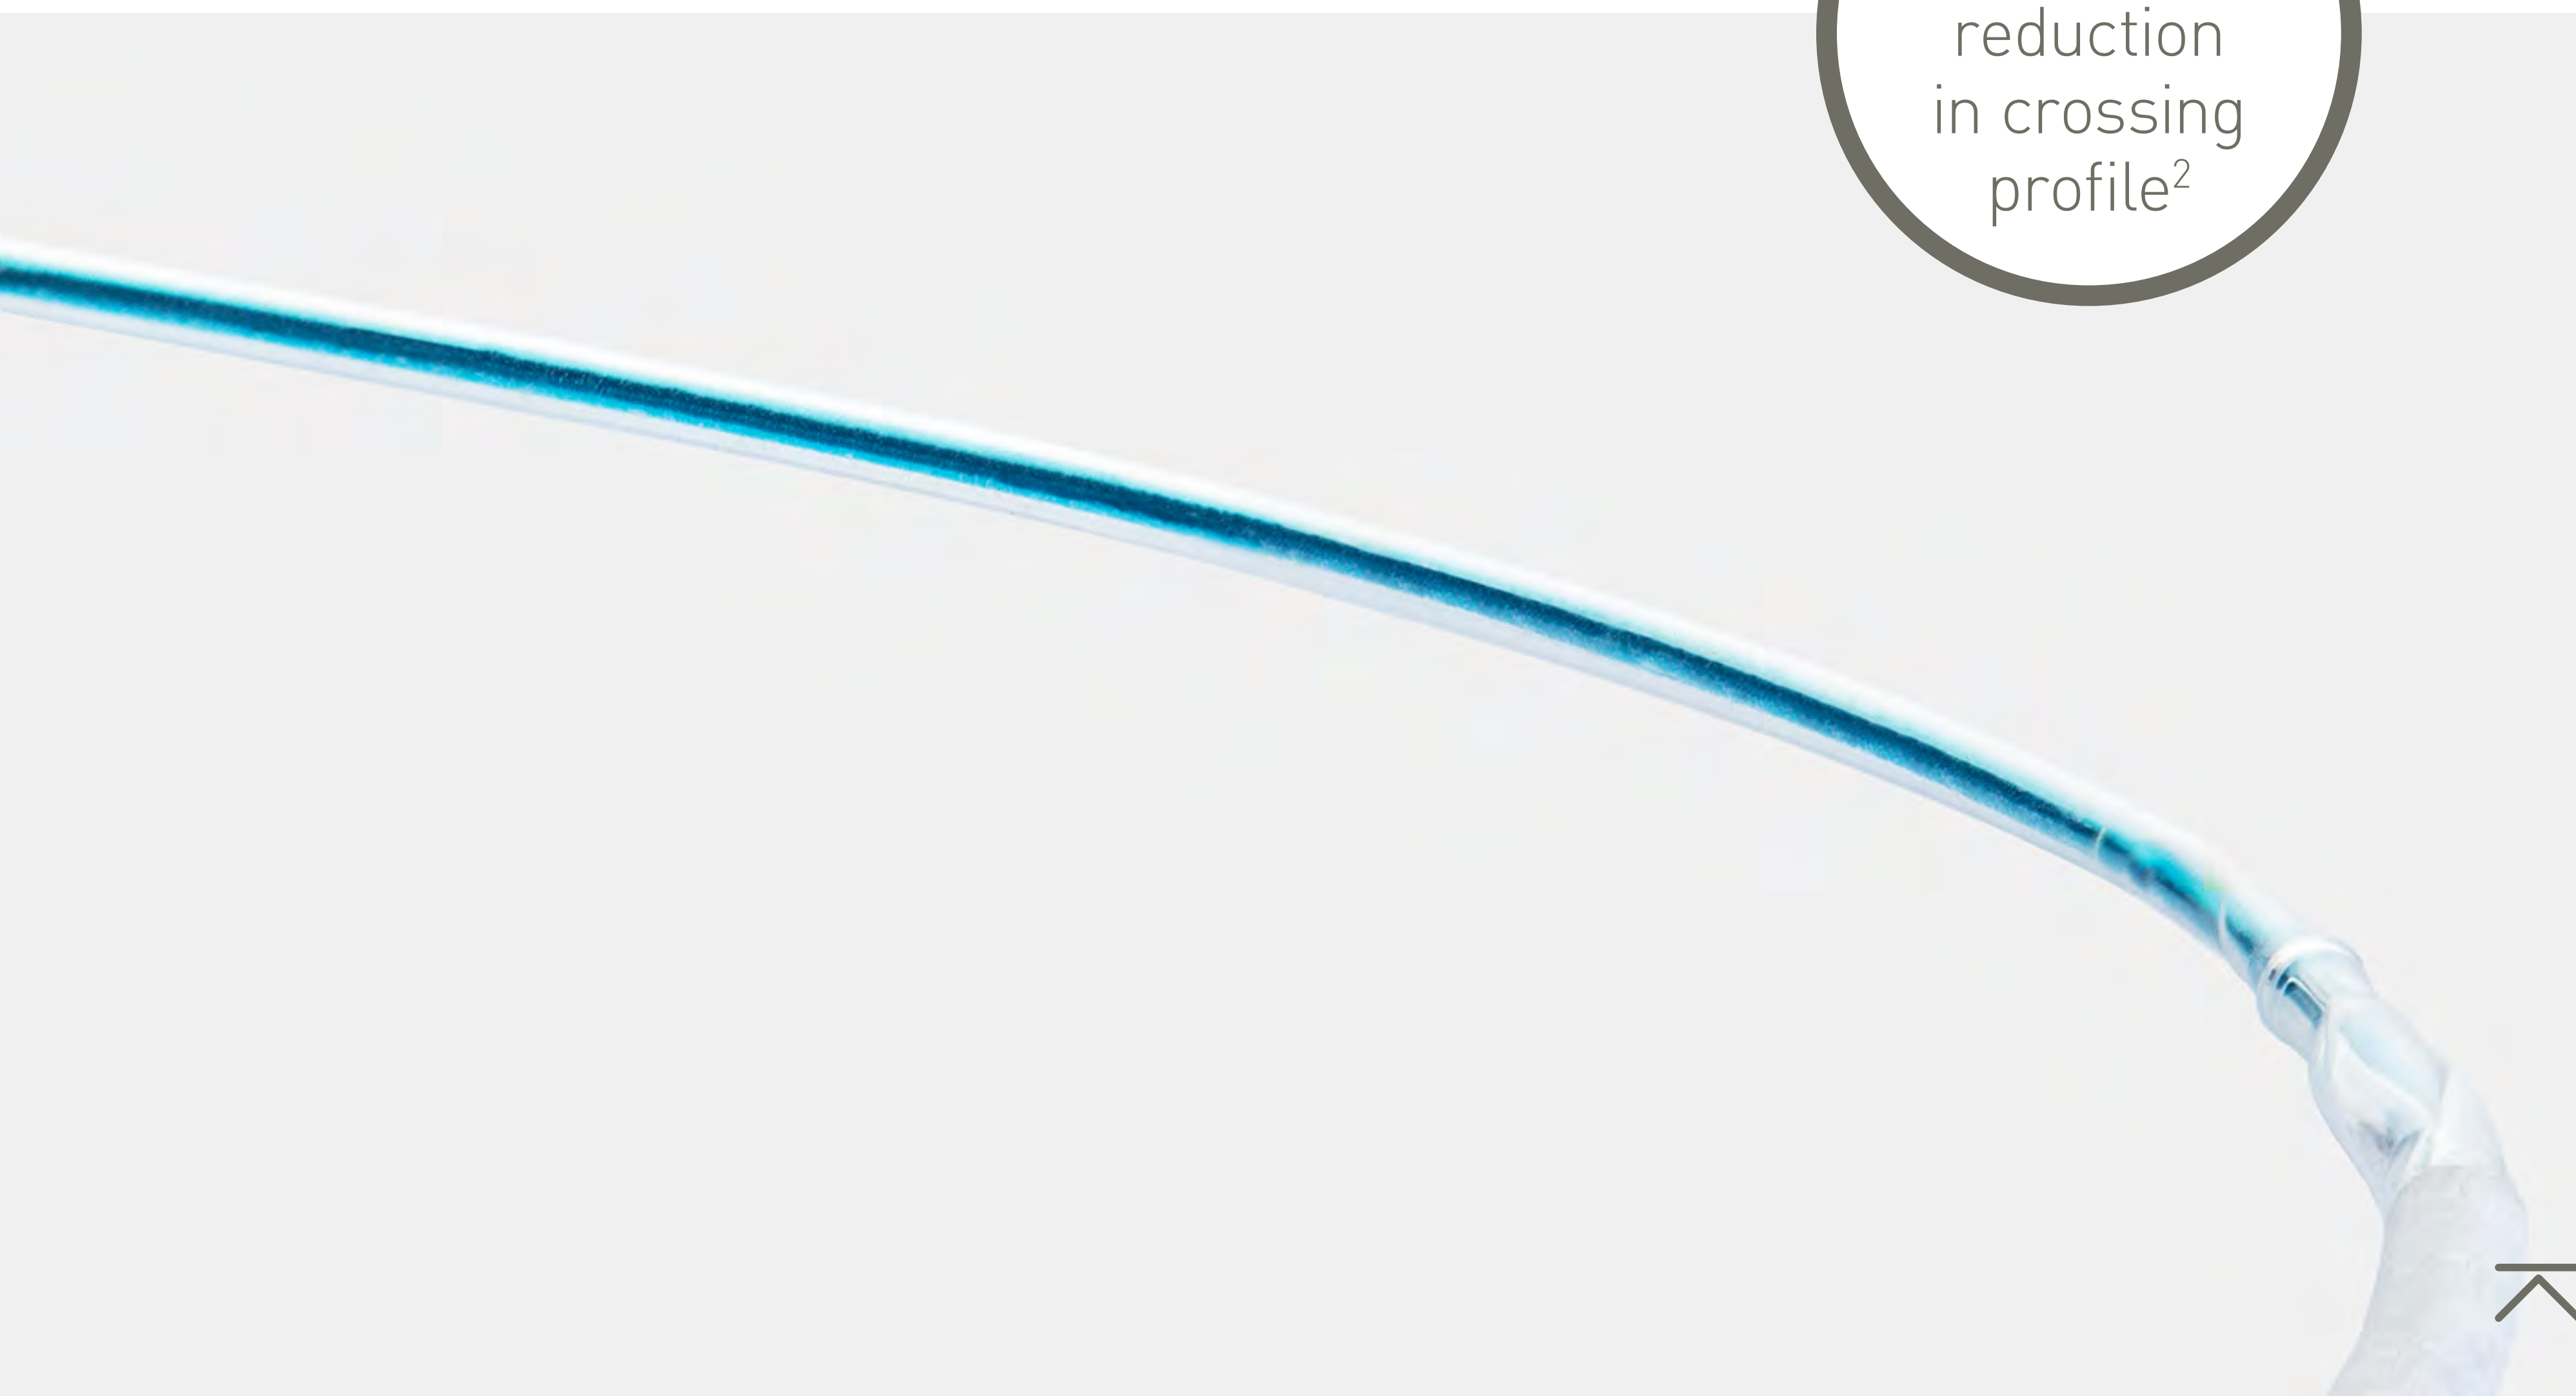



58%
greater
flexibility¹

58% greater flexibility¹

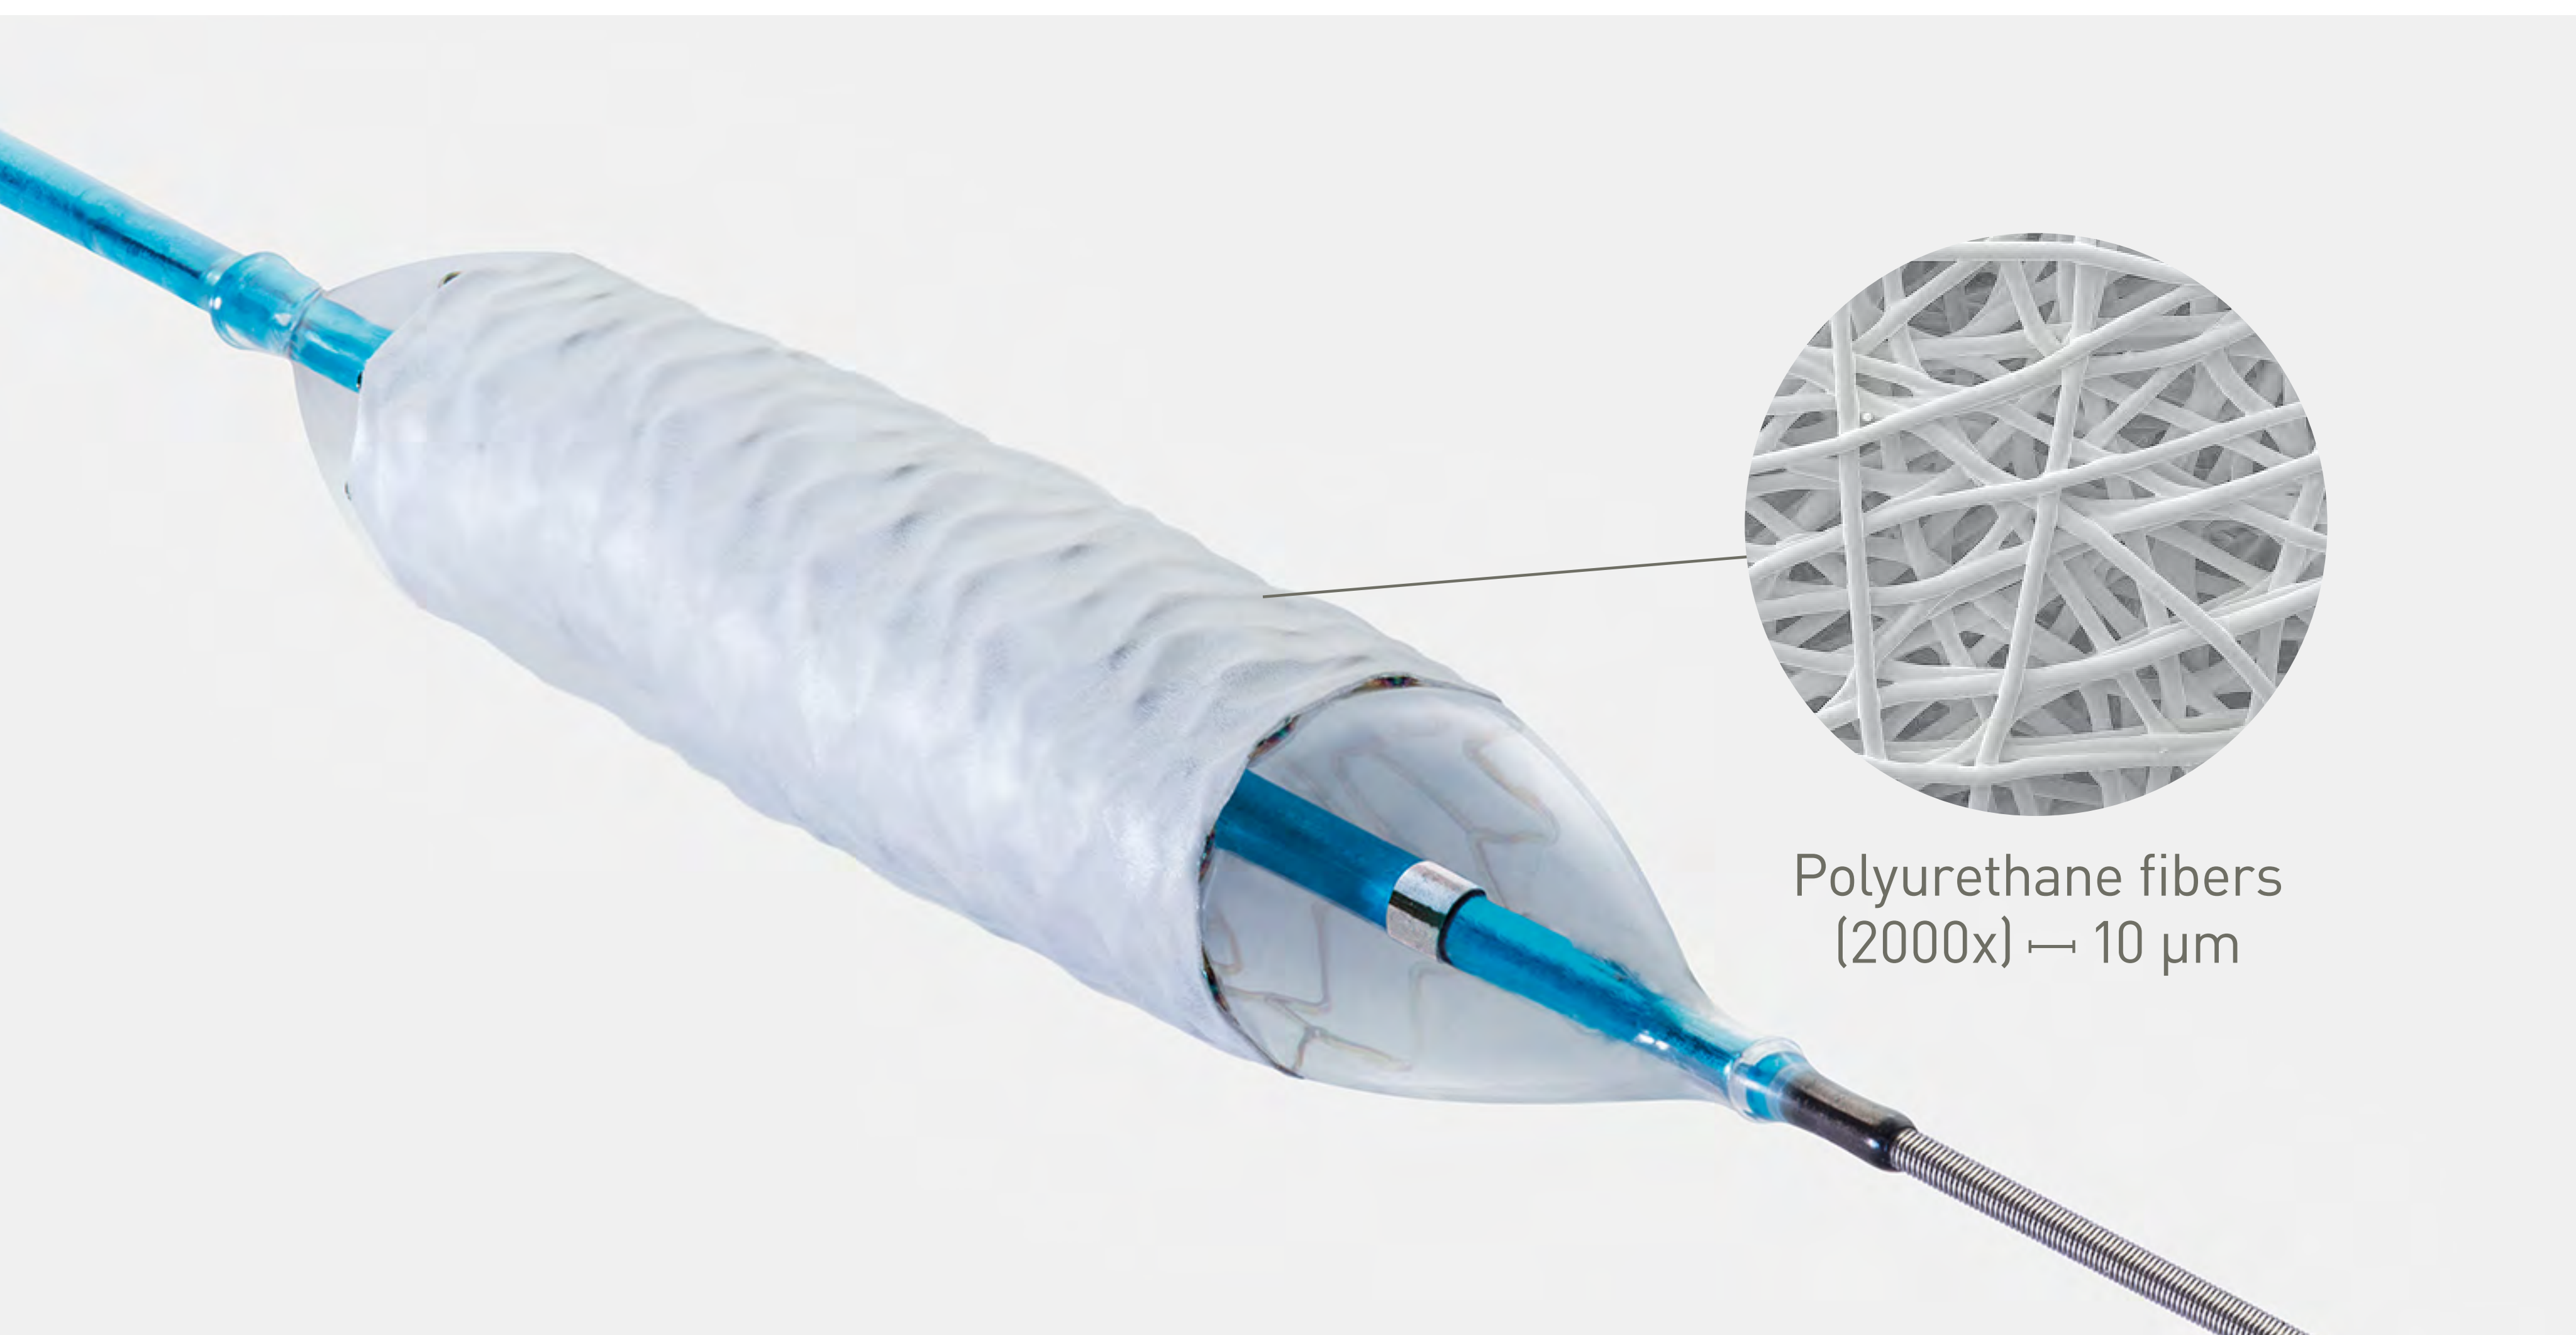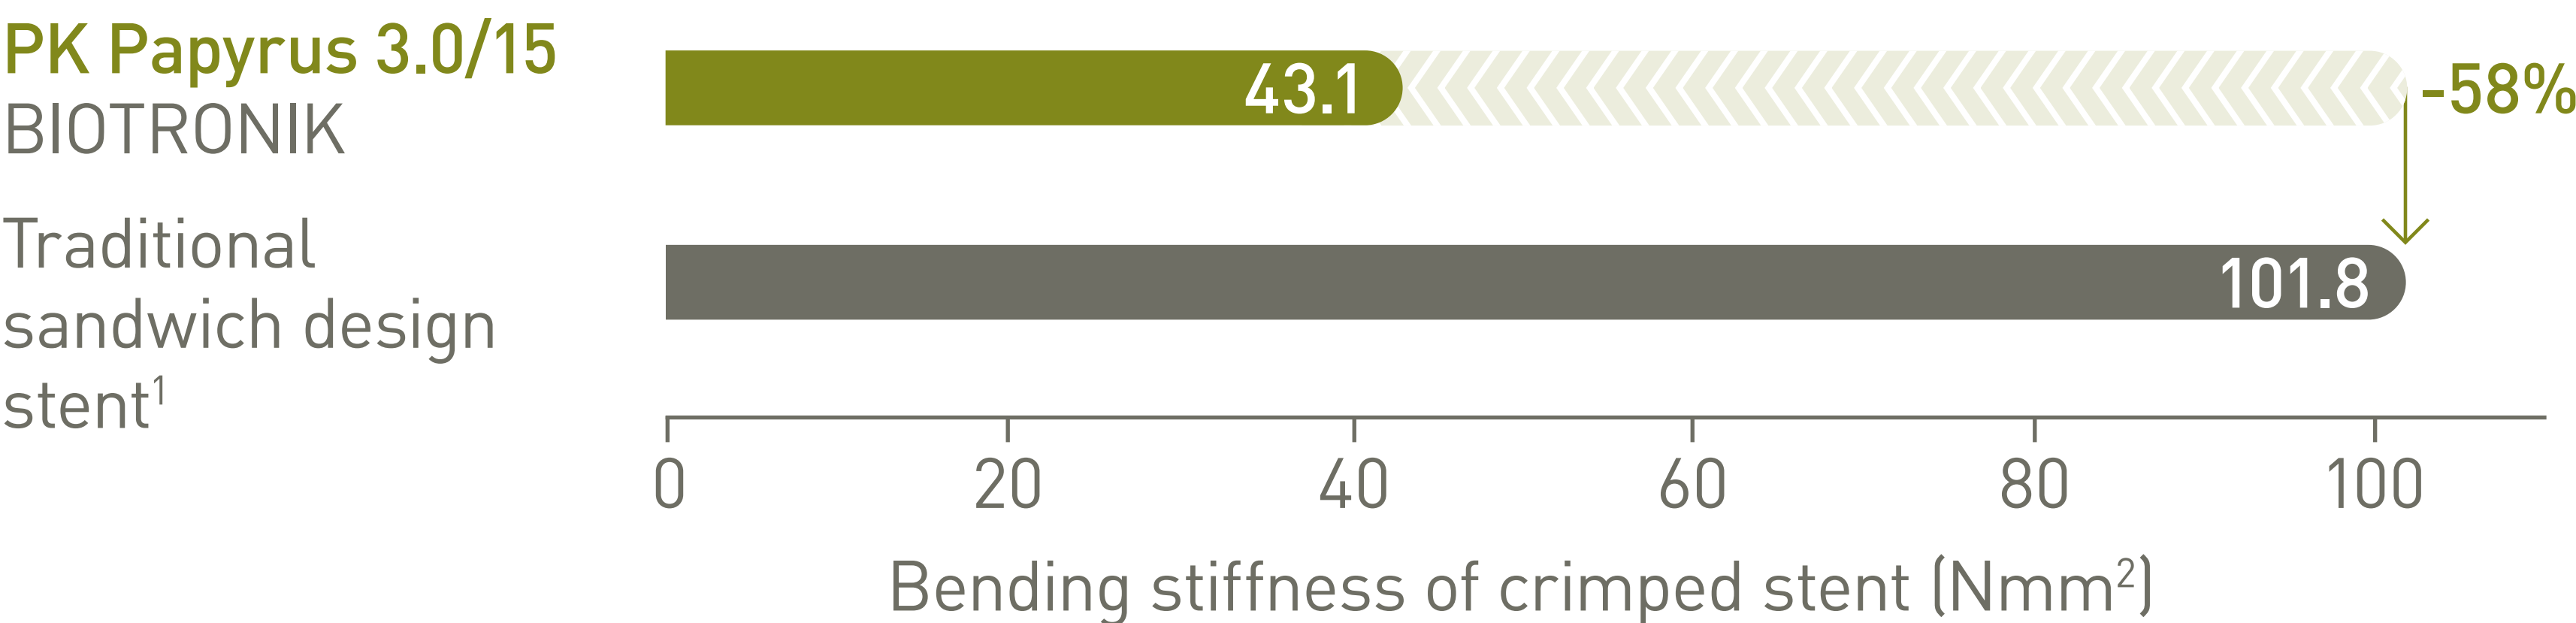


Polyurethane fibers
(2000x) → 10 µm

Innovative polyurethane membrane

Enabled by an electrospinning process, creating a polyurethane membrane only 90 µm thin.


Low crossing profile

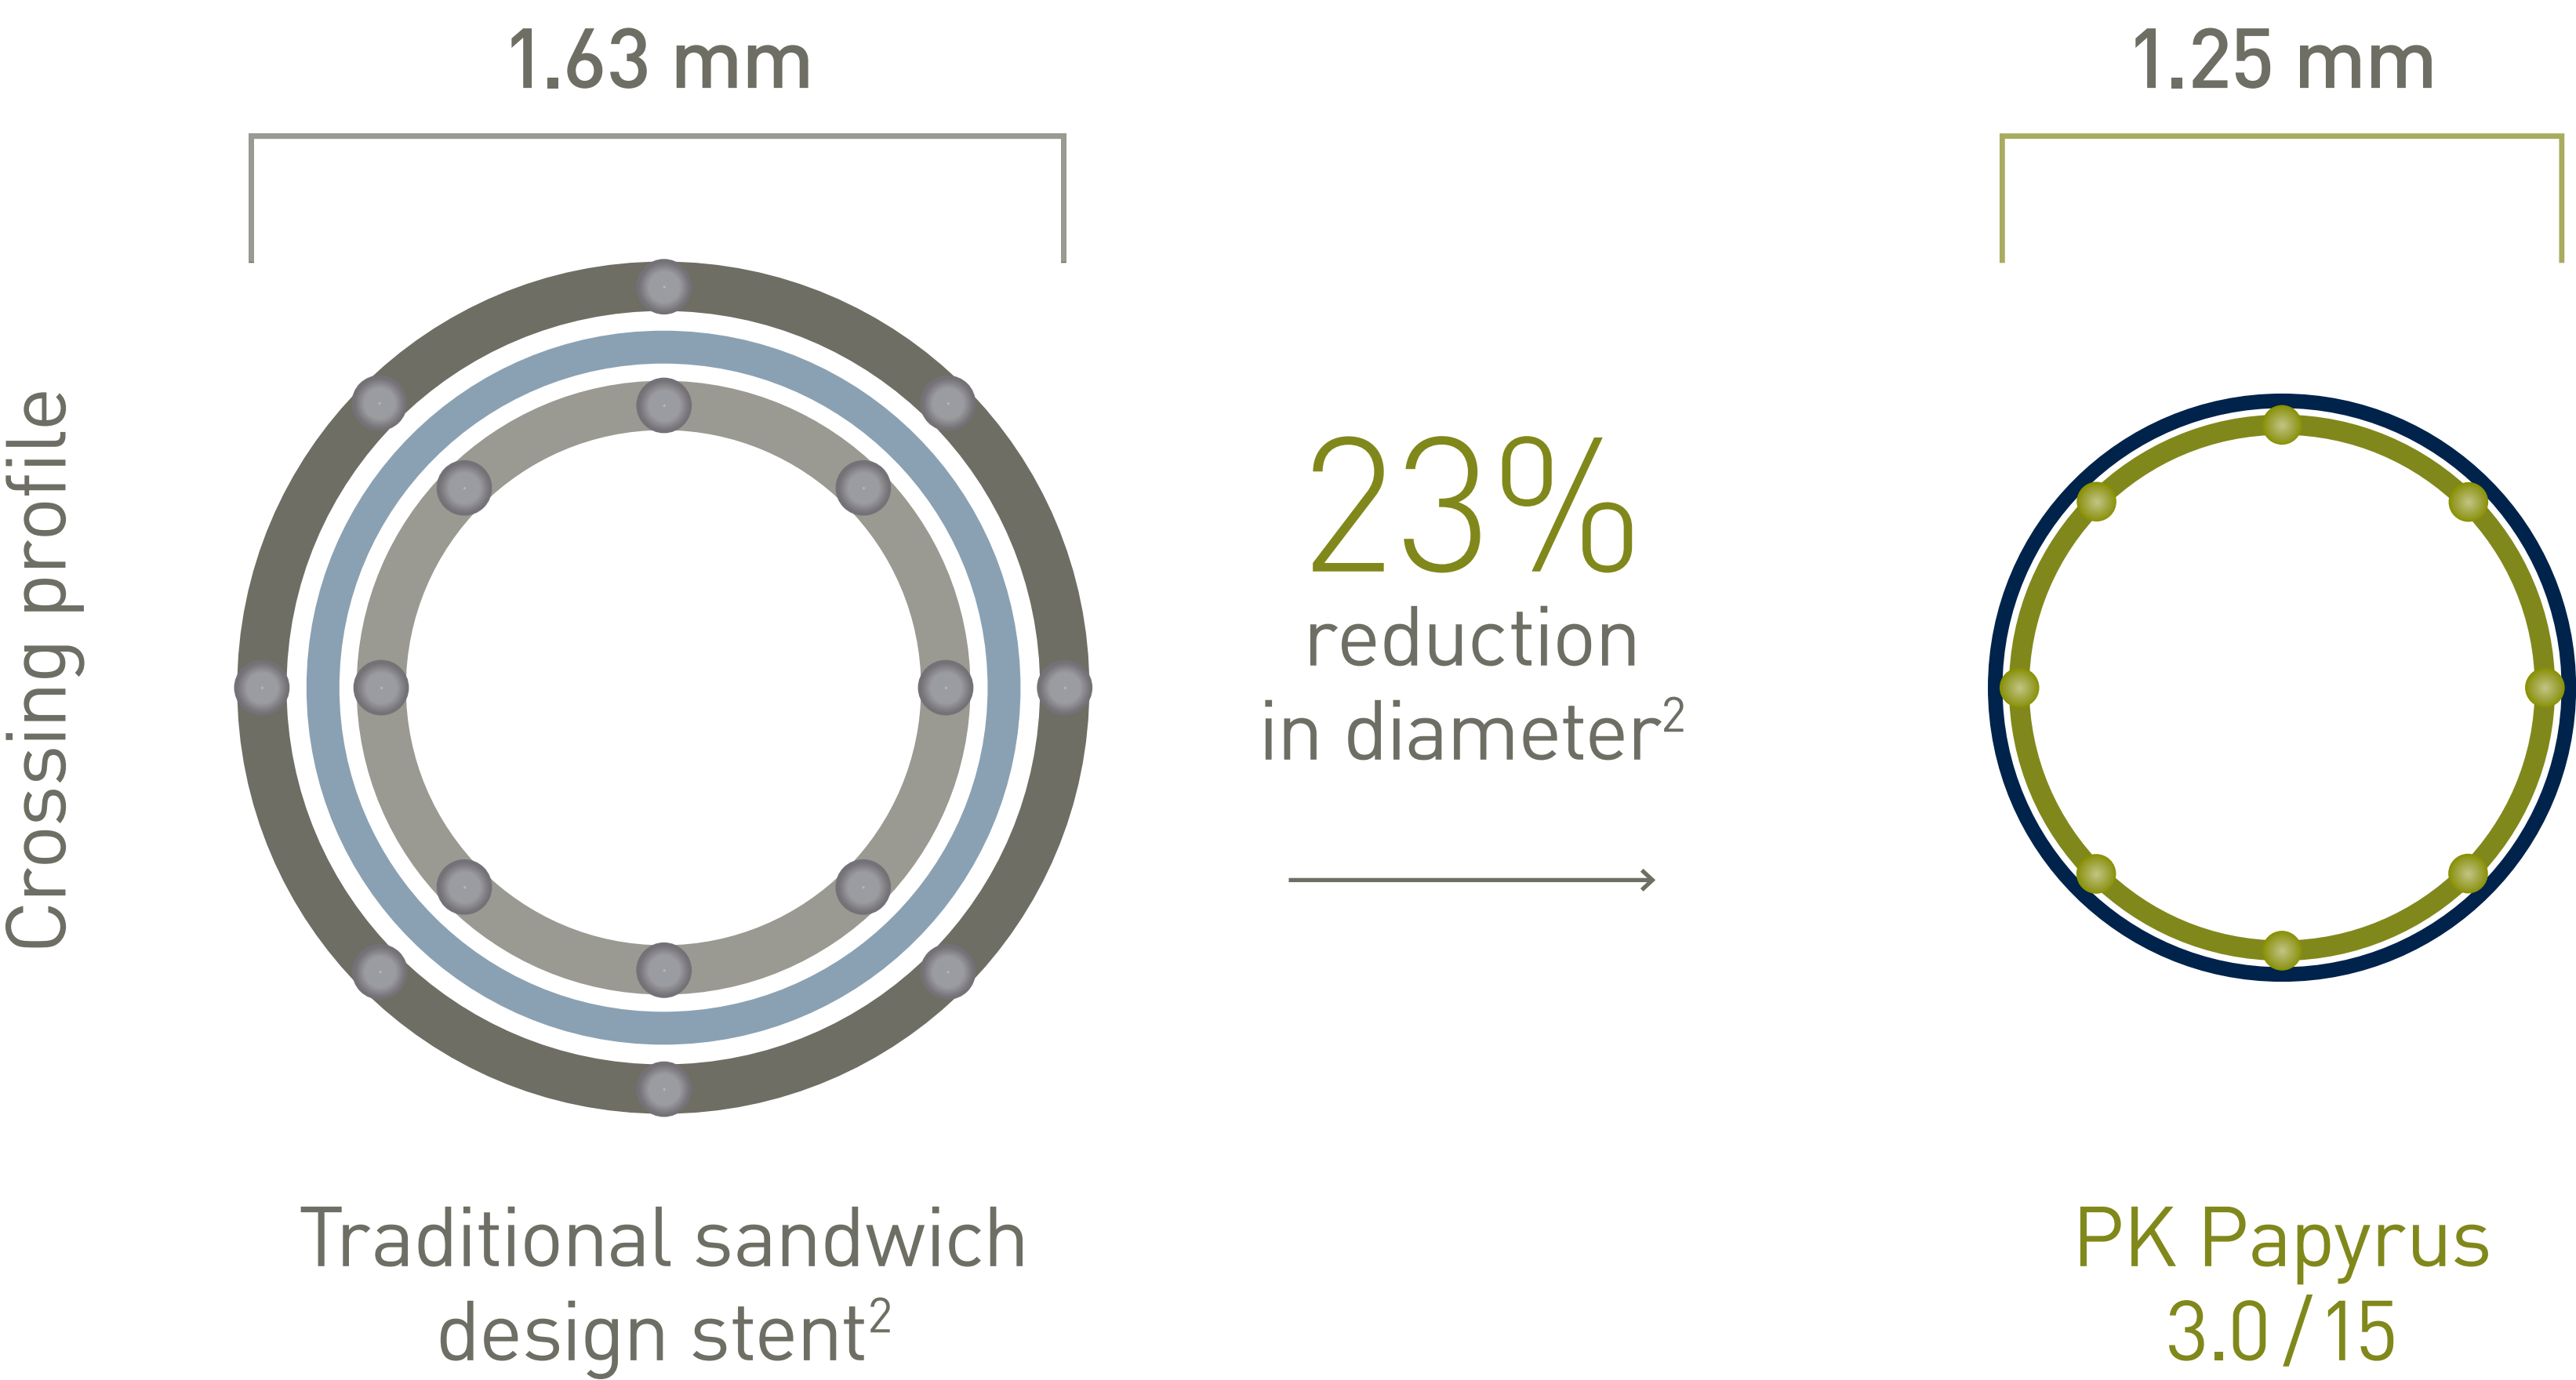

5F Compatibility

For main sizes - no need for guide catheter upgrade (ø 2.5-4.0 mm).

5F

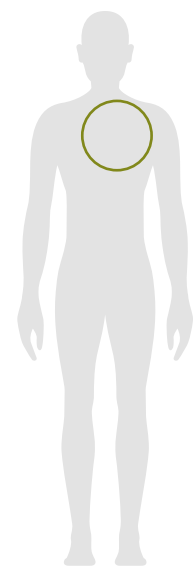

PK Papyrus

Indicated for acute coronary artery perforations.*

Technical Data	Stent	
	Stent cover material	Non-woven, electrospun polyurethane
	Stent cover thickness	90 µm
	Stent strut thickness	ø 2.5 - 3.0 mm: 60 µm (0.0024"); ø 3.5 - 4.0 mm: 80 µm (0.0031"); ø 4.5 - 5.0 mm: 120 µm (0.0047")
	Stent material	Cobalt chromium (L-605) with proBIO (Amorphous Silicon Carbide) coating
	Maximum stent expansion diameter	ø 2.5 - 3.0 mm: 3.50 mm; ø 3.5 - 4.0 mm: 4.65 mm; ø 4.5 - 5.0 mm: 5.63 mm
	Delivery system	
	Guide wire diameter	0.014"
	Usable catheter length	140 cm
	Recommended guide catheter	ø 2.5 - 4.0 mm: 5F (min. I.D.** 0.056"); ø 4.5 - 5.0 mm: 6F (min. I.D.** 0.070")
	Nominal pressure (NP)	ø 2.5 - 3.5 mm: 8 atm; ø 4.0 - 5.0 mm: 7 atm
	Rated burst pressure (RBP)	ø 2.5 - 4.0 mm: 16 atm; ø 4.5 - 5.0 mm: 14 atm
	**I.D. = Inner Diameter	

Ordering Information	Stent ø (mm)	Catheter length 140 cm Stent length (mm)		
		15	20	26
5F	2.5	369380	369386	-
	3.0	369381	369387	381789
	3.5	369382	369388	381790
	4.0	369383	369389	381791
6F	4.5	369384	369390	369392
	5.0	369385	369391	369393

1. Compared to Jostent Graftmaster 3.0/16 (BIOTRONIK data on file); 2. Compared to Graftmaster 2.8/16 (BIOTRONIK data on file)

Jostent and Graftmaster are registered trademarks of Abbott.

*Indication as per IFU.

