

# KERN PLS 1200-3A

**KERN**

High-quality precision scale with comfortable graphic display and enormous weighing range



## Category

Brand	KERN
Product category	Laboratory balance
Product group	Precision balance
Product family	PLS

## Measuring System

Weighing system	Force compensation
Weighing capacity [Max]	1200 g
Readability [d]	0,001 g
Reproducibility	0,001 g
Linearity	± 0,003 g
Resolution	1.200.000
Adjustment options	Adjusting with external weight
Recommended adjusting weight	1 kg (E2)
Possible calibration points	1 kg
Stabilization time	2 s
Warm-up time	8 h
Eccentric loading at 1/3 [Max]	0,005 g
USP Minimum weight of sample (k = 2, U = 0.1%)	2 g
Construction type of the scale	Single-range balance

Units	g
	mg
	gn
	dwt
	tl (Tw)
	tl (HK)
	ozt
	tl (Singap, Malays)
	ct
	mo

	lb
	oz
Weighing capacity [Max] (ct)	6000 ct
Readability carat [d] (ct)	0,01 ct
Maximum creep (15 minutes)	10 mg
Maximum creep (30 minutes)	20 mg
Default unit	g

## Display

Display type	LCD graphic
Display backlight	✓
Display screen size	132×38 mm
Display digit height - smallest digit	4 mm
Display digit height	15 mm
Languages of the user interface	English

## Construction

Dimension housing (W×D×H)	210×340×120 mm
Dimensions completely mounted (W×D×H)	210×340×160 mm
Dimensions ring-shaped draught shield - inner (Ø×H)	150×60 mm
Dimensions ring-shaped draught shield - outer (Ø×H)	160×70 mm
Dimensions weighing surface (Ø)	110 mm
Dimensions weighing surface	110 mm
Material housing	plastic
Material weighing plate	stainless steel
Material platform	stainless steel
Material draught shield	glass
Level indicator	✓
Levelling feet adjustable	✓

## Functions

Recipe/summing level	Rez B (Net-total, memory with plain text designations + setpoint, also for printout)
Recipe weighing - number of database entries	99
Recipe weighing - number of ingredients per database entry	20
Percentage determination	✓
Density determination	✓
Tolerance weighing	✓
Tolerance weighing - type of signal	acoustically visual
Underfloor weighing	Eye (included in delivery)

# KERN PLS 1200-3A



High-quality precision scale with comfortable graphic display and enormous weighing range

Function for averaging under unstable weighing conditions	✓
Time display	✓
Capacity - Display	✓
Standby function	✓
Counting function	✓
Counting resolution (laboratory conditions)	240.000
Counting reference weight can be entered	✓
Smallest piece weight when piece counting - laboratory conditions	5 mg
Smallest piece weight when piece counting - normal conditions	50 mg
Reference quantity	10, 25, 50, 100, n (any number of pieces)
Auto-off interval(s) in mains power mode	off 5 min 2 min 15 min
Tare function	manual (multi)
Number of keys for operation	6

## Interface

Interfaces	RS-232 standard
------------	-----------------

## Power Supply

Supplied power supply	Power supply unit
Power supply type	Power adapter
Plug-in power supply / adapter for countries - included with the delivery	EURO AUS UK US CH
Plug-in power supply / adapter for countries - optional	EURO UK US CH
Input voltage power supply / power [Max]	100 V - 240 V, 50 / 60 Hz
Power supply cable removable	removable
Input voltage device / power [Max]	24 V 1 A
Power socket for mains adapter	Hollow plug, inside plus, Ø outside 5,5 mm, Ø inside 2,1 mm, long 10,5 mm

## Environmental conditions

Ambient temperature [Min]	15 °C
Ambient temperature [Max]	35 °C

Humidity of environment [Max]	80 %
Storage temperature [Max]	40 °C

## Approval

CE mark	✓
---------	---

## Services (optional)

Article number for DAkkS calibration	963-103
Article number for certificate of conformity	969-517

## Packing & Shipping


Delivery time	1 d
Dimensions packaging (W×D×H)	500×360×420 mm
Shipping method	Parcel service
Net weight approx.	4,8 kg
Gross weight approx.	7 kg
Shipping weight	15,1 kg

## Product information

GTIN/EAN number	4045761243293
REACH classification	no prohibited substances

## Pictograms

### STANDARD

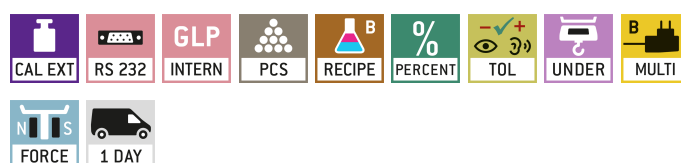

### OPTION

