


LEGEND



- 101 HV Bushing
- 102 MV Bushing
- 103 LV Bushing
- 106 HV-N Bushing
- 187 Earthing terminal
- 201 On load tap changer
- 230 Motor drive for OLTC
- 310 Thermometer case
- 400 Conservator
- 501 Lifting pin for complete unit
- 512 Cabinet for control devices
- 540 Main drain valve
- 586 Skid
- 608 Radiator
- 620 Fan
- 751 Name plate
- 752 Power plate
- 780 Wheel
- 790 Ladder
- 801 Buchholz relay
- 815 Oil level gauge and switch "trafo"
- 816 Oil level gauge and switch "OLTC"
- 833 Thermal image relay transformer
- 834 Contact thermometer
- 885 Pressure relief device
- 955 Breather

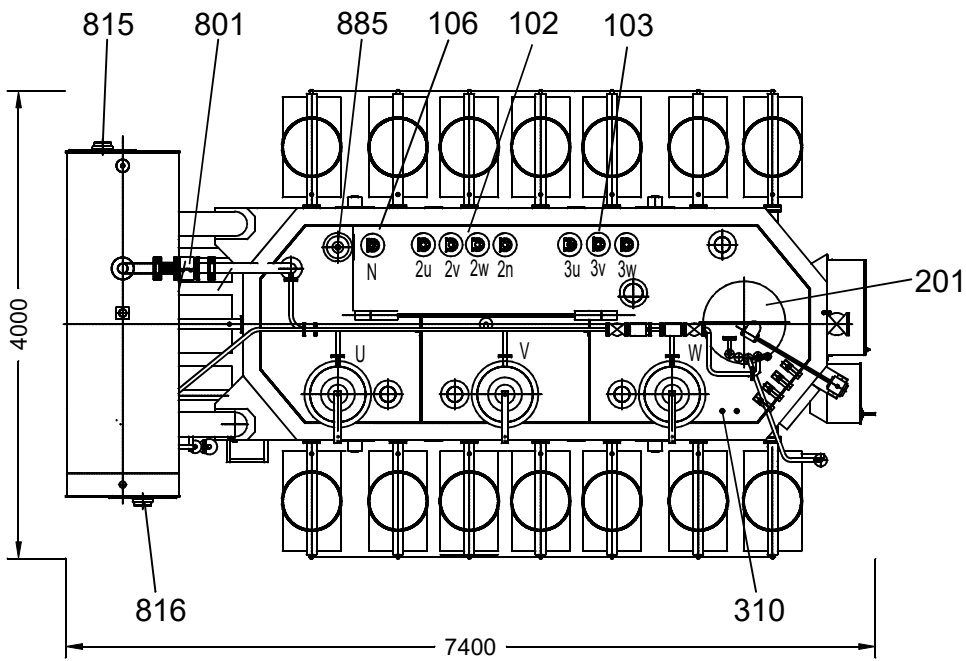

NOMINAL POWER = 20 / 25 MVA
 NOMINAL VOLTAGE = 115 / 38,5 / 11 KV
 ACTIVE PART WEIGHT = 39,00 t.
 OIL WEIGHT = 19,50 t.
 TOTAL WEIGHT = 76,50 t.

TRANSPORTATION WEIGHT = 69,00 t. (with oil and without coolers)
 TRANSPORTATION DIMENSIONS = 2300 x 6100 x 3600 mm
 (W x L x H)

NON OBLIGATORY DRAWING

 ASTOR ®	DATE	DRAW	CHECK	APPROVE	REVISION	00
	24.08.2022	E.DOLAP	H.ÇELIKBAY	E. ARSLAN	REV. DATE	-
	PTR 25000 / 123 DIMENSIONAL DRAWING				DRAWING NO 23/2733	
IF IN DOUBT - PLEASE ASK !					SCALE	
ALL DIMENSIONS IN MILIMETRES UNLESS OTHERWISE STATED DIM. WITHOUT TOLERANCES ACC. TO ISO 2768 COARSE SURFACE TEXTURE : ISO 1302					- / -	